



TECHNICAL SPECIFICATIONS					
VOLTS		120			
AMPS		12.5			
WATTS		1500			
	HIGH	1500 watts			
HEATER	LOW	750 watts			
NO HEATER		22 watts			
	QUANTITY	LED			
LAMPS	WATTS				
	TOTAL WATTS	22 watts			
ROTOR MOTOR		1 at 5 watts			
HEIGHT, WIDTH, DEPTH		23 1/2 x 48 1/2 x 12			
GLASS VIEWING OPENING		12" x 45 1/4"			
SURROUND SIZE		15 3/4" x 49 1/4"			
SHIPPING SIZE		25 3/4 × 58 × 14 1/2"			
SHIPPING WEIGHT		111 lbs			
	UNIT				
GLASS FRONT		Included			
PLUG LOCATION		Left Side			
CORD LENGTH		76''			
APPROX. HEATING AREA		400 sq ft			



SERIES BUILT IN	MODEL BI-50-DEEP	© US	REV 1
SCALE 1" = 1'-0"	DATE: 11/1/2013	SHEET 1 OF 1	

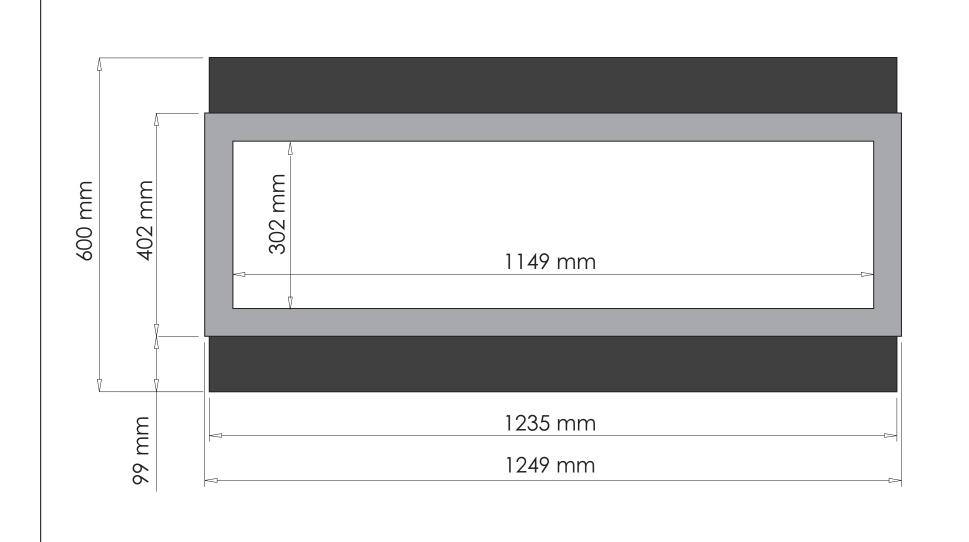

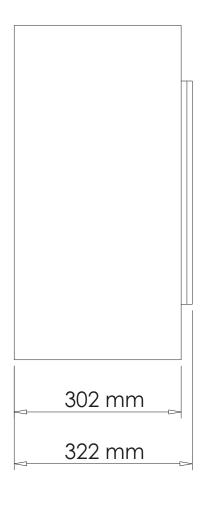

TECHNICAL SPECIFICATIONS				
VOLTS		120		
AMPS		12.5		
WATTS		1500		
HEATER	HIGH	1500 watts		
	LOW	750 watts		
NO HEATER		22 watts		
	QUANTITY	LED		
LAMPS	WATTS			
	TOTAL WATTS	22 watts		
ROTOR MOTOR		1 at 5 watts		
HEIGHT, WIDTH, DEPTH		60 x 123.5 x 30.2 cm		
GLASS VIEWING OPENING		30.2 x114.9 cm		
SURROUND SIZE		40.1 x 124.9 cm		
SHIPPING SIZE		64 x 146.3 x 36.8 cm		
SHIPPING WEIGHT		50 kg		
UNIT				
GLASS FRONT		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		193 cm		
APPROX. HEATING AREA		37 sqm		





SERIES	MODEL		REV	
BUILT IN	BI-50-DEEP	c Us	1	
SCALE 1:12	DATE: 11/1/2013	SHEET 1 OF 1		