


TECHNICAL SPECIFICATIONS				
VOLTS		120		
AMPS		12.5		
WATTS		1500		
LIEATED	HIGH	1500 watts		
HEATER	LOW	750 watts		
NO HEATER		22 watts		
	QUANTITY	LED		
LAMPS	WATTS			
	TOTAL WATTS	22 watts		
ROTOR MOTOR		1 at 5 watts		
HEIGHT, WIDTH, DEPTH		23 1/2 x 48 1/2 x 6 3/4		
GLASS VIEWING OPENING		12" x 45 1/4"		
SURROUND SIZE		15 3/4" x 49 1/4"		
SHIPPING SIZE		25 1/4 x 59 3/4 x 9 3/4"		
SHIPPING WEIGHT		106 lbs		
	UNIT			
GLASS FRONT		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		76''		
APPROX. HEATING AREA		400 sq ft		



nantii

SERIES BUILT IN	BI-50-SLIM		rev 1
SCALE 1" = 1'-0"	DATE: 7/1/2015	SHEET 1 OF 1	



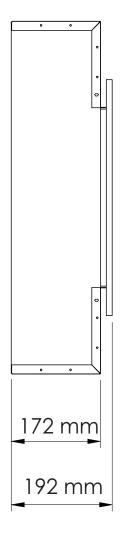

TECHNICAL SPECIFICATIONS				
VOLTS		120		
AMPS		12.5		
WATTS		1500		
115 4 750	HIGH	1500 watts		
HEATER	LOW	750 watts		
NO HEATER		22 watts		
	QUANTITY	LED		
LAMPS	WATTS			
	TOTAL WATTS	22 watts		
ROTOR MOTOR		1 at 5 watts		
HEIGHT, WIDTH, DEPTH		60 x 123.5 x 17.2 cm		
GLASS VIEWING OPENING		30.2 x114.9 cm		
SURROUND SIZE		40.1 x 124.9 cm		
SHIPPING SIZE		64 x 151.3 x 24.8 cm		
SHIPPING WEIGHT		48 kg		
UNIT				
GLASS FRONT		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		193 cm		
APPROX. HEATING AREA		37 sqm		



SERIES BUILT IN	MODEL BI-50-SLIM	© US	REV 1
SCALE 1:12	DATE: 7/1/2015	SHEET 1 OF 1	