



| TECHNICAL SPECIFICATIONS | | | | |
|--------------------------|-------------|--------------------------|--|--|
| VOLTS | | 120 | | |
| AMPS | | 12.5 | | |
| WATTS | | 1500 | | |
| HEATER | HIGH | 1500 watts | | |
| | LOW | 750 watts | | |
| NO HEATER | | 22 watts | | |
| | QUANTITY | LED | | |
| LAMPS | WATTS | | | |
| | TOTAL WATTS | 22 watts | | |
| ROTOR MOTOR | | 1 at 5 watts | | |
| HEIGHT, WIDTH, DEPTH | | 23 1/2 x 72 1/4 x 12 | | |
| GLASS VIEWING OPENING | | 12 x 68 3/4 | | |
| SURROUND SIZE | | 15 3/4 x 72 3/4 | | |
| SHIPPING SIZE | | 25 1/4 x 81 1/8 x 14 1/2 | | |
| SHIPPING WEIGHT | | 157 lbs | | |
| UNIT | | | | |
| GLASS FRONT | | Included | | |
| PLUG LOCATION | | Left Side | | |
| CORD LENGTH | | 76'' | | |
| APPROX. HEATING AREA | | 400 sq ft | | |



| SERIES BUILT IN | MODEL BI-72-DEEP | ©®° _{US} | REV 1 |
|--------------------|------------------|-------------------|----------|
| SCALE 1" = 1'-0" | DATE: 11/1/2013 | SHEET 1 OF 1 | |

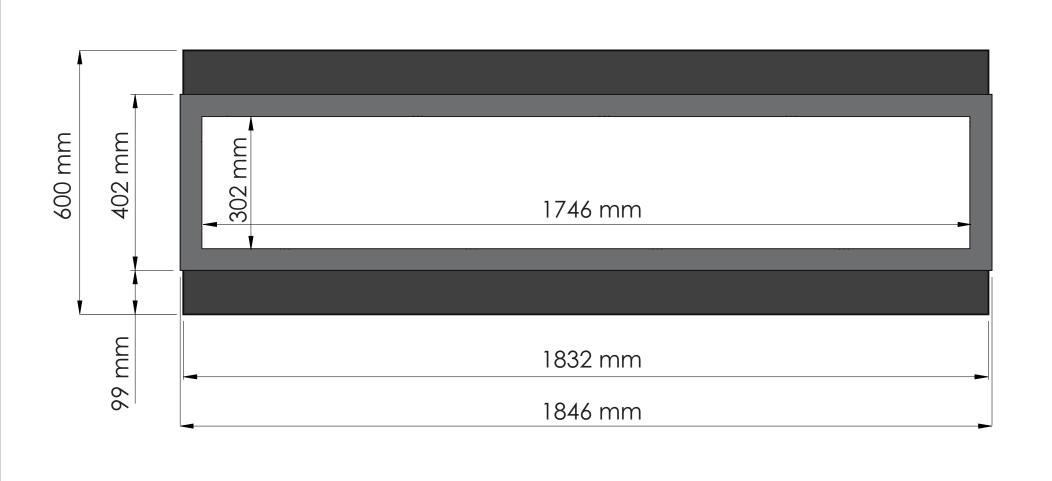

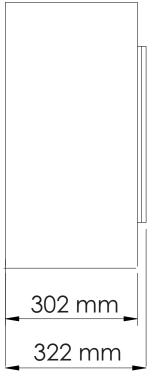

| TECHNICAL SPECIFICATIONS | | | | | |
|--|-------------|----------------------|--|--|--|
| VOLTS | | 120 | | | |
| AMPS | | 12.5 | | | |
| WATTS | | 1500 | | | |
| HEATER | HIGH | 1500 watts | | | |
| | LOW | 750 watts | | | |
| NO HEATER | | 22 watts | | | |
| LAMPS | QUANTITY | LED | | | |
| | WATTS | | | | |
| | TOTAL WATTS | 22 watts | | | |
| ROTOR MOTOR HEIGHT, WIDTH, DEPTH GLASS VIEWING OPENING SURROUND SIZE SHIPPING SIZE | | 1 at 5 watts | | | |
| | | 60 x 183.2 x 30.2 cm | | | |
| | | 30.2 x 174.6 cm | | | |
| | | 40.2 x 184.6 cm | | | |
| | | 64 x 206 x 36.8 cm | | | |
| SHIPPING WEIGHT | | 71 kg | | | |
| UNIT GLASS FRONT PLUG LOCATION CORD LENGTH | | | | | |
| | | Included | | | |
| | | Left Side | | | |
| | | 193 cm | | | |
| APPROX. HE | ATING AREA | 37 sqm | | | |



| SERIES BUILT IN | MODEL BI-72-DEEP | © US | REV 1 |
|--------------------|------------------|--------------|----------|
| SCALE 1:12 | DATE: 11/1/2013 | SHEET 1 OF 1 | |