



TECHNICAL SPECIFICATIONS				
VOLTS		120		
AMPS		12.5		
WATTS		1500		
HEATER	HIGH	1500 watts		
	LOW	750 watts		
NO HEATER		22 watts		
	QUANTITY	LED		
LAMPS	WATTS			
	TOTAL WATTS	22 watts		
ROTOR MOTOR		1 at 5 watts		
HEIGHT, WIDTH, DEPTH		23 1/2 x 72 1/4 x 6 3/4		
GLASS VIEWING OPENING		12 x 68 3/4		
SURROUND SIZE		15 3/4 x 72 3/4		
SHIPPING SIZE		25 1/4 x 83 1/4 x 9 3/4		
SHIPPING WEIGHT		150 lbs		
UNIT				
GLASS FRONT		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		76''		
APPROX. HEATING AREA		400 sq ft		



SERIES BUILT IN	MODEL BI-72-SLIM	<b>®</b> *	REV 1
SCALE 1" = 1'-0"	DATE: 7/1/2015	SHEET 1 OF 1	

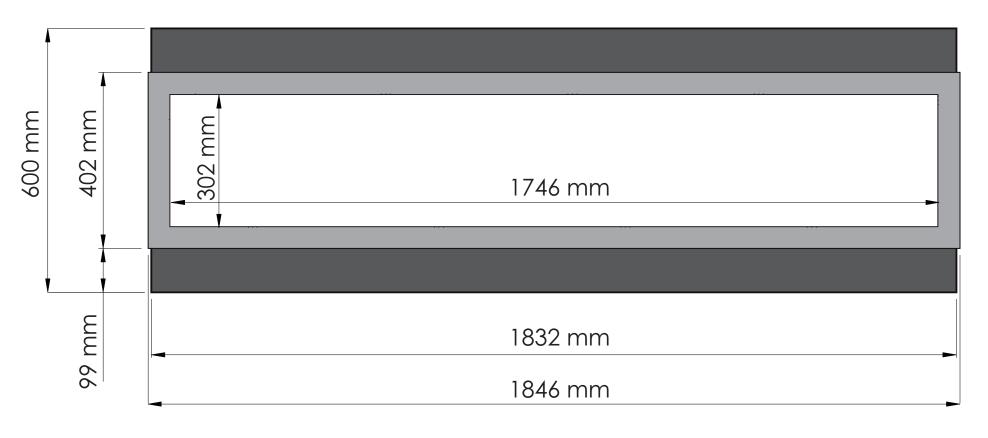

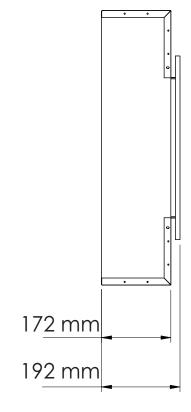

TECHNICAL SPECIFICATIONS					
VOLTS		120			
AMPS		12.5			
WATTS		1500			
HEATER	HIGH	1500 watts			
	LOW	750 watts			
NO HEATER		22 watts			
LAMPS	QUANTITY	LED			
	WATTS				
	TOTAL WATTS	22 watts			
ROTOR MO	ror .	1 at 5 watts			
HEIGHT, WIE	OTH, DEPTH	60 x 183.2 x 17.2 cm			
GLASS VIEWING OPENING		30.2 x 174.6 cm			
SURROUND SIZE		40.2 x 184.6 cm			
SHIPPING SIZE		64 x 211 x 24.8 cm			
SHIPPING WEIGHT		68 kg			
	UNIT				
	GLASS FRONT	Included			
PLUG LOCA	TION	Left Side			
CORD LENGTH		193 cm			
APPROX. HE	ATING AREA	37 sqm			



SERIES BUILT IN	MODEL BI-72-SLIM	<b>*</b> US	REV 1
SCALE 1:12	DATE: 7/1/2015	SHEET 1 OF 1	