


## TUNGSTEN

SMART-HEAT™ ELECTRIC

An infrared electric heater blending aesthetics and function

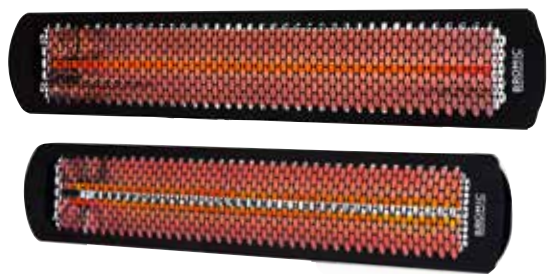

### Standard Colours

Matte Black

Matte White

\*Other colours available on request - qty requirements apply

Witness the art of smart-heating with Bromic Heating's new Tungsten Smart-Heat™ Electric, an infrared electric heater blending aesthetics with function.

The Tungsten Smart-Heat™ Electric is stylishly designed to provide efficient directional heating for commercial and residential locations.


Available in 4 models of varying heating power and compatible with smart control systems to enable precise dimming control. Included are wall and ceiling mounting brackets to allow adjustable angle of the heating direction with simple one-touch on/off switch.

Heaters are equipped with a spectral reflector for excellent radiant heat output and are weatherproof.




## INSTALLATION CLEARANCES FOR 2000W & 3000W MODELS

(All measurements in inches)

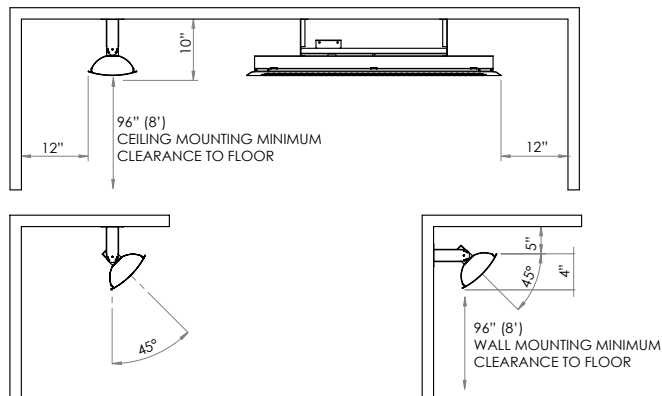


## INSTALLATION CLEARANCES FOR 4000W & 6000W MODELS

(All measurements in inches)

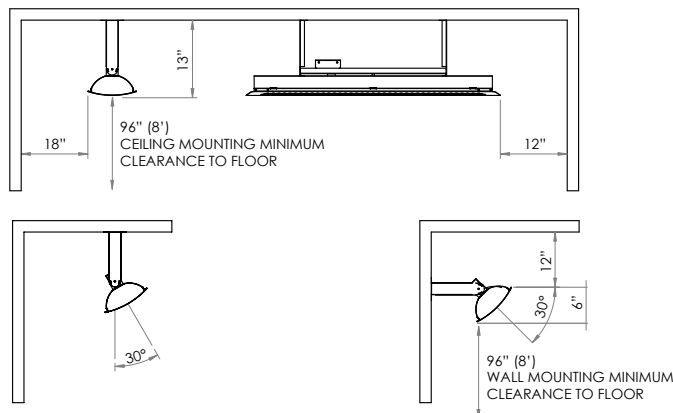


\*Alternatively, short mounting brackets can be used for wall mounting of the 4000w & 6000w models to position the heater closer to the wall. Short mounting brackets must be purchased separately.



## HEAT DISTRIBUTION:

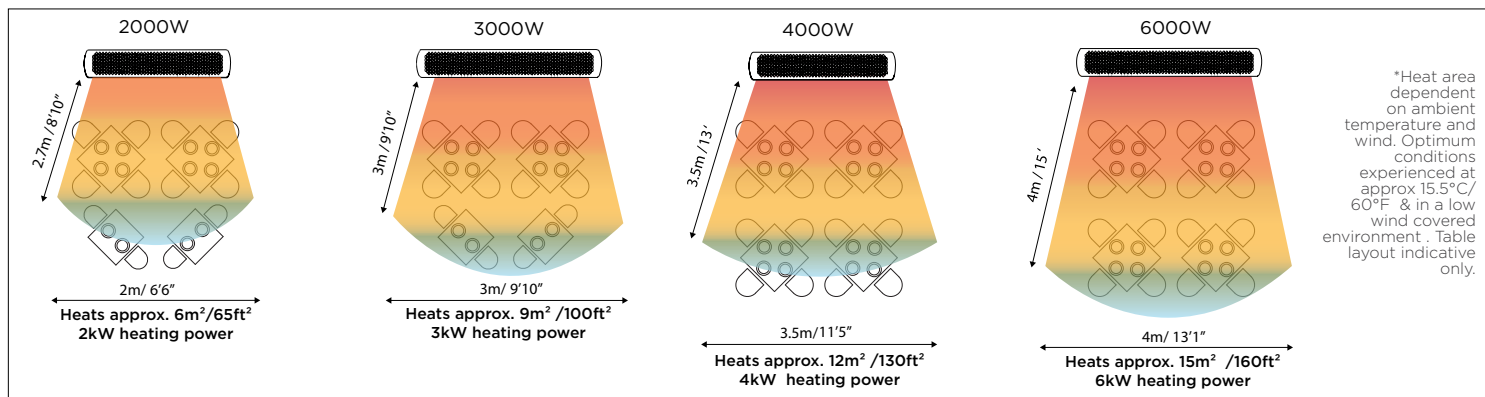

## 2000W & 4000W

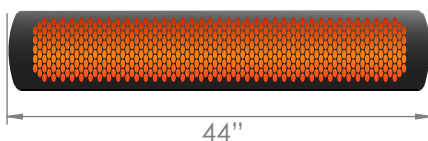

## 3000W & 6000W

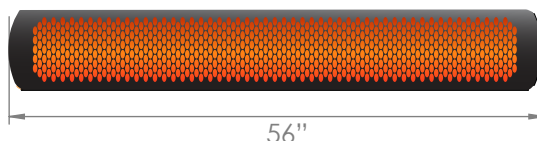

## SPECIFICATIONS:

Model	2000W	3000W	4000W	6000W
Part no.	BH0420002	BH0420003	BH0420004	BH0420005
No. of Elements	Single element	Single element	Double element	Double element
Bracket Length	6.5"	6.5"	9.5"	9.5"
Power (Watts)	2000W	3000W	4000W	6000W
Heating Area*	up to 65ft <sup>2</sup>	up to 100ft <sup>2</sup>	up to 130ft <sup>2</sup>	up to 160ft <sup>2</sup>
Power connection required (Volts/Amps)	220 V / 9 A	220 V / 13.6 A	220 V / 18.1A	220 V / 27.2A
Dimension (W"xD"xH")	44" x 8.5" x 3.5"	56" x 8.5" x 3.5"	44" x 8.5" x 3.5"	56" x 8.5" x 3.5"
Minimum Mounting height requirement to ground	Ceiling Mounting - 96" (8') / Wall Mounting - 96" (8')			
Weight (lb)	19.8lb	22lb	19.8lb	22lb
Finish	Black High Temperature Coating			

Product must only be installed and serviced by a licensed and authorised technician.

Product manual must be read before installing or servicing this product.

\*Heating areas are based on protected environment with mounting height of 96" (8'). For unprotected and extremely cold and windy environments heating areas can be less. Please contact Bromic Heating for further advice.

4005951  
CONFORMS TO UL STD. NO. 2021  
CERTIFIED TO CSA STD. C22.2 NO.46



International patent pending and design registered by BROMIC HEATING Pty Ltd, a member of the Bromic Group of companies.

**BROMICHEATING.COM**

SMART-HEATING

Last reviewed: August 14th 2014 (US)

HEAD OFFICE: 8105 IRVINE CENTER DRIVE, 9TH FLOOR, IRVINE, CA.. 92618

T: 1 800 301 1293

F: (858) 346-1388

E: info@bromicheating.com

W: www.bromicheating.com