

St. Clair 3000

Features

- Simple Operation
- Easy to Maintain
- EPA 2020 Certified
- Limited Lifetime Warranty
- Multiple Design Options
- Includes Blower

Specifications


- Heating Area 750-2500 sq. ft.
- Burn Time 9 hours
- Maximum Heat Output 80,000 BTUs
- Maximum Log Length 18 in.
- Firebox Size 3.0 cu. ft.
- Min Fireplace 38" H x 36 ½" W x 24" D


Options & Accessories

- Faceplate (Required)
 - Traditional Faceplate
- 2 Door Options (Requires 1)
 - Nickel Door Overlay
 - Black Door Overlay
- Accessories
 - Black Barrier Fire Screen
 - Fresh Air Intake Kit
 - Forced Air Distribution Kit
 - Gravity Air Circulation Kit

St. Clair 3000


DIMENSIONS



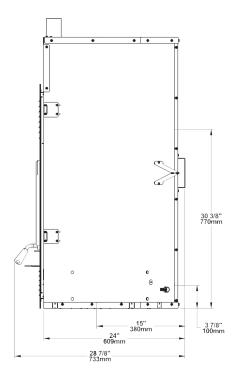

MINIMUM OPENING DIMENSIONS

ST. CLAIR 3000 A B C D US 41 3/4" 49 1/8" 24" 80"

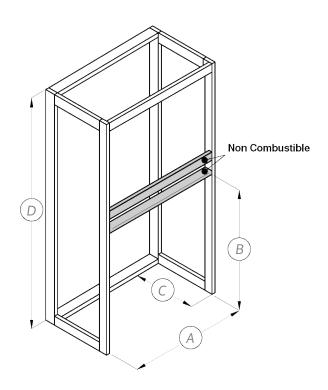

LIMITED LIFETIME: Combustion chamber (welds only) and cast iron door frame, Ceramic Glass, Plating (manufacture defect), step top. LIMITED 7 YEAR: Surrounds, heat shields, ash drawer, pedestal, C-Cast Baffle, secondary air tubes, deflectors and supports. LIMITED 5 YEAR: Handle assembly, glass retainers, air control mechanism, removable carbon steel combustion chamber components. LIMITED 2 YEAR: Standard and optional blower, heat sensors, switches, rheostat, wiring and electronics. LIMITED 1 YEAR: Paint peeling, gaskets, insulation, ceramic fiber blankets, firebricks and other options. LIMITED 90 DAY: All parts replaced under warranty.

