



THE BEST ROOM IN THE HOUSE
ISN'T IN THE HOUSE AT ALL



OUTDOOR FIREPLACES

| | |
|-----------|---|
| Kalea Bay | 6 |
|-----------|---|

BURNER SYSTEMS

| | |
|------------------|----|
| Ignition Systems | 12 |
| Round Pan | 16 |
| Round Flat | 20 |
| Square Pan | 24 |
| Square Flat | 28 |
| L-Series | 32 |
| Line of Fire | 36 |

BURNERS

| | |
|--------------|----|
| Burning Spur | 40 |
| Fire Ring | 42 |
| H Burner | 43 |

AnF

| | |
|--------------|----|
| AnF | 46 |
| AnF Packages | 48 |

ARCHITECTURAL BLOCK & PAVER ACCESSORIES

| | |
|----------------|----|
| Flexframe | 52 |
| Control Panels | 53 |
| Vent Kits | 54 |
| Paver Kits | 55 |

FIRE FURNISHINGS

| | |
|---------------------------|----|
| Concrete Fire Furnishings | 58 |
| Key West Coffee Table | 60 |

JEWELRY

| | |
|----------|----|
| How Much | 64 |
| Media | 65 |
| Glass | 66 |
| Log Sets | 68 |

ACCESSORIES

| | |
|--------------------|----|
| E-Stop Timer | 72 |
| Controls | 73 |
| Windshields | 74 |
| Lids | 75 |
| Hoses & Regulators | 76 |
| Valves & Keys | 77 |
| Fittings | 78 |
| Flex Lines | 79 |
| Replacement Parts | 80 |
| Pans | 82 |
| Dealer Tools | 84 |

DISCLAIMER: Skytech Products Group reserves the right to change, amend or modify this catalog without notice.



BURNER SYSTEMS



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS IGNITION SYSTEMS

THERMOCOUPLE FLAME SENSE ⓘ (TFS)

ABOUT

Firegear's TFS Electronic Ignition System comes fully assembled. No power, no problem. Our TFS systems do not require 110Vac and simply operate with four (4) AA batteries. You can place it virtually anywhere. Lighting the fire is at your fingertips using the provided On / Off / High / Low remote control. Don't want to use batteries? No problem, just add our A/C adapter AF-4000ADP24-80.

If you want to control your fire feature with your home / pool automation system, our AF-4000HAT works with most manufacturers systems. The TFS system features auto shut-off in case of flame loss. It will then auto re-light.

FULLY ASSEMBLED | FINGERTIP IGNITION | ADJUSTABLE FLAME | SAFETY SHUT-OFF

FEATURES

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Thermocouple Flame Sense TFS technology with Reliable Direct Spark Ignition (Non Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Safety Valve turns gas OFF when flame goes out
- High / Low adjustable flame height
- Fully assembled and ready to install
- Each unit ships with a 46" tranquiline flex line and all fittings necessary for installation
- Pans Available in Round, Square and Flat Disc Configurations in a Variety of Sizes
- Warranty: Five (5) year on stainless steel components. Two (2) years on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts
- Optional Accessory: A/C adapter for continuous power - AF-4000ADP24-80
- Optional Accessory: Home / Pool Automation Transmitter - AF-4000HAT
- Optional Controls: Wired Wall Mount Switch, Wireless Wall Mount Switch, Wireless Wall Mount Timer, Wireless Wall Mount On/Off/High/Low



WIRELESS REMOTE

All thermocouple flame sense systems come standard with our RCAF-3TX. It's a wireless remote so you can ignite your fireplace anywhere within a 30 feet range. No more lighters, matches, or manual valves.



HOME / POOL AUTOMATION

Firegear offers a product called the AF-4000HAT, which stands for the Home/Pool Automation Transmitter. It allows you to operate your Firegear TFS product from the same controller you're using with your home automation or pool system. It's important to note that even though you are using the HAT, you can still use your original remote that came with your TFS system.



ACCESSORIES

The TFS systems have many optional accessories to choose from. You can learn up to 3 different Skytech remotes on the same system, or maybe you would prefer 110V power running to the system. We have that covered with our AF-4000ADP24.

HOW TO LIGHT

1. Press the ON button on the hand-held remote transmitter. You will hear the igniter probe begin sparking for fifteen (15) seconds and the fire pit will ignite.
2. To turn OFF the fire pit, simply depress the OFF button on your remote control.

BURNER SYSTEMS

IGNITION SYSTEMS

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)



THERMOCOUPLE MANUAL SAFETY with SPARK IGNITION (TMSI)



ABOUT


New for 2018 we have combined our popular TMS (Thermocouple Manual Safety) System and MSI (Manual Spark Ignition) to create our new Fully Assembled, TMSI Certified Systems. The TMSI System combines the convenience of variable flame and safety. Lighting the fire is as simple as pushing a button. Once lit, the flame is fully adjustable at the valve knob which features a safety shut-off that turns the gas valve OFF in case of flame loss.

TMSI OPERATION

1. Rotate the control knob on the gas valve counter-clockwise to the ON position.
2. Press the Spark Ignition button.
3. Depress the control knob inward while pressing the spark ignition button.
4. After the fire pit lights, release the spark ignition button. Continue depressing the control knob for thirty (30) seconds, then release the control knob.
5. To turn OFF the fire pit, turn the control knob clockwise to the OFF position.

FEATURES

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Thermocouple Manual Safety (TMS) technology
- Battery operated Manual Spark push button ignition
- Safety Valve turns gas OFF if flame goes out
- Fully adjustable flame height
- Fully assembled & ready to install
- Each unit ships with a mounting plate, 46" tranquiline flex line and all fittings necessary for installation
- Pans available in round / square / flat configurations in a variety of sizes
- Natural Gas with optional Liquid Propane conversions available
- Warranty: Five (5) years on stainless steel components. Two (2) years on gas valve, spark ignition components. Commercial Applications: One (1) year on all parts.

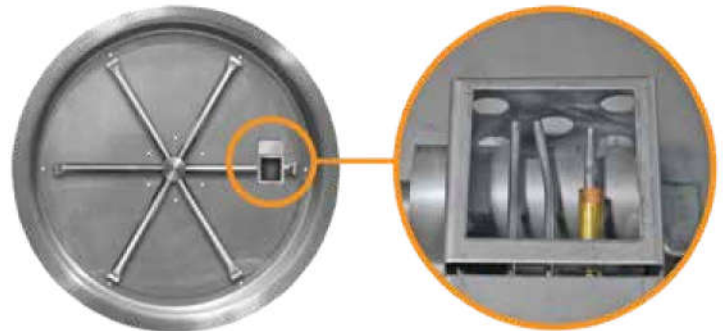

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

MATCH THROW (MT)

ABOUT

Simple and easy to operate, the Match Throw (MT) System combines convenience and variable flame. Lighting the fire is as simple as lighting a butane lighter or match, placing the flame near the burner and slowly turn the key to operate the valve. Once lit, the flame is fully adjustable at the key valve.

MT OPERATION

1. Insert key into shut-off valve and secure key onto square end of the valve.
2. Light a long match or butane lighter and hold it near the burner.
3. Slowly turn the key counter-clockwise inside the gas valve (until it stops, which allows the gas to flow) and simultaneously apply the long burning match or Butane lighter as close to the end of the burner as possible.
4. To turn off the fire pit, insert key into key valve, turn the key clockwise and the gas will shut OFF.

FEATURES

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Key valve with key valve cover and 12" key
- Optional: Battery operated manual spark push button ignition
- Fully adjustable flame height
- Fully assembled and ready to install
- Each unit ships with a 46" tranquiline flex line and all fittings necessary for installation
- Pans available in round / square / flat configurations in a variety of sizes
- Natural Gas with optional Liquid Propane conversion available
- Warranty: Five (5) years on stainless steel components. Two (2) years on gas valve, spark ignition components. Commercial Applications: One (1) year on all parts.



WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS

ROUND PAN



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ROUND PAN



⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FEATURES | OF THE TFS SYSTEM

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Thermocouple Flame Sense TFS technology with Reliable Direct Spark Ignition (Non Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Safety Valve turns gas OFF when flame goes out
- High / Low adjustable flame height
- Fully assembled and ready to install
- Each unit ships with a 46" tranquiline flex line and all fittings necessary for installation
- Warranty: Five (5) year on stainless steel components. Two (2) years on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS

ROUND PAN

ROUND (TFS) THERMOCOUPLE FLAME SENSE



ACCESSORIES

| | |
|-----------------|---|
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |
| WS | Wired wall mount switch (On/Off) (pg. 73) |
| TM-R-AFITX | Wireless wall mount timer (30/60/120min) (pg. 73) |
| 1001D-AFITX | Wireless wall mount switch (On/Off) (pg. 73) |
| 1322WT | Wireless wall mount On/Off/High/Low transmitter (pg. 73) |
| AF-4000ADP24-80 | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems (pg. 73) |
| AF-4000HAT | Home/Pool Automation Transmitter system (pg. 73) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg. 83) |
| LIDS | Stainless Steel lids with brushed finish (pg. 75) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-19RBSTFS-N | 19" | 16" | TFS | Natural | 80,000 | 45,000 |
| FPB-25RBSTFS-N | 25" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-29RBSTFS-N | 29" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-33RBSTFS-N | 33" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-19RBSTFS-P | 19" | 16" | TFS | Propane | 79,000 | 47,400 |
| FPB-25RBSTFS-P | 25" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB-29RBSTFS-P | 29" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB-33RBSTFS-P | 33" | 22" | TFS | Propane | 100,000 | 49,500 |

ROUND (TMSI) THERMOCOUPLE MANUAL SAFETY with SPARK IGNITION



ACCESSORIES

| | |
|-------------|--|
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |
| LPK#41 | Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB-19 / 25 / 29 / 33 RBSTMSI-N |
| LIDS | Stainless Steel lids with brushed finish (pg. 75) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg. 83) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|-----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-19RBSTMSI-N | 19" | 16" | TMSI | Natural | 65,500 | N/A |
| FPB-25RBSTMSI-N | 25" | 22" | TMSI | Natural | 65,500 | N/A |
| FPB-29RBSTMSI-N | 29" | 22" | TMSI | Natural | 65,500 | N/A |
| FPB-33RBSTMSI-N | 33" | 22" | TMSI | Natural | 65,500 | N/A |

BURNER SYSTEMS

ROUND PAN

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ROUND (MT) MATCH THROW



ACCESSORIES

- E-STOP** Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)
- LPK#47** Liquid Propane (LP) conversion kit. Converts fire pit from Natural Gas to LP gas. Includes: Orifice / Air shutter, rating plate label sticker and instructions. For use with FPB-16RBSMT-N, 45,000 BTU
- LPK#41** Liquid Propane (LP) conversion kit. Converts fire pit from Natural Gas to LP gas. Includes: Orifice / Air shutter, rating plate label sticker and instructions. For use with FPB-19 / 25 / 29 / 33 RBSMT-N, 45,000 BTU
- MSI-BSMTI** Manual spark ignition kit for FPB series match throw systems featuring the burning spur. Kit includes: Mounting plate, spark igniter module, ignition hood, ignition hood screen, ignition rain shield, 2-probe spark igniter, burner rain shield and bracket, Ignition wiring and a AAA battery.
- VENT-6X12SS** Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- LIDS** Stainless Steel lids with brushed finish (pg. 75)

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|---------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-16RBSMT-N | 16" | 12" | MT | Natural | 45,500 | N/A |
| FPB-19RBSMT-N | 19" | 16" | MT | Natural | 65,000 | N/A |
| FPB-25RBSMT-N | 25" | 22" | MT | Natural | 65,000 | N/A |
| FPB-29RBSMT-N | 29" | 22" | MT | Natural | 65,000 | N/A |
| FPB-33RBSMT-N | 33" | 22" | MT | Natural | 65,000 | N/A |

ROUND (NON-LISTED)



ACCESSORIES

- OAS-LP45** Propane conversion kit (Orifice / Air Shutter) for 16" burning spur. 55,000 BTU
- OAS-LP35** Propane conversion kit (Orifice / Air Shutter) for 22" burning spur. 99,000 BTU
- OAS-LP29** Propane conversion kit (Orifice / Air Shutter) for 31" burning spur. 150,000 BTU
- VENT-6X12SS** Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- E-STOP** Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)
- LIDS** Stainless Steel lids with brushed finish (pg. 75)

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|-----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-25RBS22MT-N | 25" | 22" | MT | Natural | 100,000 | N/A |
| FPB-29RBS22MT-N | 29" | 22" | MT | Natural | 100,000 | N/A |
| FPB-33RBS31MT-N | 33" | 31" | MT | Natural | 160,000 | N/A |

BURNER SYSTEMS

ROUND FLAT




⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ROUND FLAT



⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FEATURES | OF THE TFS SYSTEM

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Thermocouple Flame Sense TFS technology with Reliable Direct Spark Ignition (Non Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Safety Valve turns gas OFF when flame goes out
- High / Low adjustable flame height
- Fully assembled and ready to install
- Each unit ships with a 46" tranquiline flex line and all fittings necessary for installation
- Warranty: Five (5) year on stainless steel components. Two (2) years on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS

ROUND FLAT

ROUND FLAT (TFS) THERMOCOUPLE FLAME SENSE



ACCESSORIES

| | |
|-----------------|---|
| WS | Wired wall mount switch (On/Off) (pg. 73) |
| TM-R-AFITX | Wireless wall mount timer (30/60/120min) (pg. 73) |
| 1001D-AFITX | Wireless wall mount switch (On/Off) (pg. 73) |
| 1322WT | Wireless wall mount On/Off/High/Low transmitter (pg. 73) |
| AF-4000ADP24-80 | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems (pg. 73) |
| AF-4000HAT | Home/Pool Automation Transmitter system (pg. 73) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |

| | MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|------------|----------------|----------|-------------|-----------------|----------|----------|---------|
| NEW | FPB-20DBSTFS-N | 19 3/4" | 16" | TFS | Natural | 80,000 | 45,000 |
| | FPB-29DBSTFS-N | 29" | 22" | TFS | Natural | 105,000 | 51,000 |
| | FPB-34DBSTFS-N | 34" | 22" | TFS | Natural | 105,000 | 51,000 |
| | FPB-44DBSTFS-N | 44" | 22" | TFS | Natural | 105,000 | 51,000 |
| NEW | FPB-20DBSTFS-P | 19 3/4" | 16" | TFS | Propane | 79,000 | 47,400 |
| | FPB-29DBSTFS-P | 29" | 22" | TFS | Propane | 100,000 | 49,500 |
| | FPB-34DBSTFS-P | 34" | 22" | TFS | Propane | 100,000 | 49,500 |
| | FPB-44DBSTFS-P | 44" | 22" | TFS | Propane | 100,000 | 49,500 |

ROUND FLAT (TMSI) THERMOCOUPLE MANUAL SAFETY with SPARK IGNITION



ACCESSORIES

| | |
|-------------|--|
| LPK#41 | Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB-20 / 29 / 34 / 44 DBSTMSI-N |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |

| | MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|------------|-----------------|----------|-------------|-----------------|----------|----------|---------|
| NEW | FPB-20DBSTMSI-N | 19 3/4" | 16" | TMSI | Natural | 65,500 | N/A |
| | FPB-29DBSTMSI-N | 29" | 22" | TMSI | Natural | 65,500 | N/A |
| | FPB-34DBSTMSI-N | 34" | 22" | TMSI | Natural | 65,500 | N/A |
| | FPB-44DBSTMSI-N | 44" | 22" | TMSI | Natural | 65,500 | N/A |

BURNER SYSTEMS

ROUND FLAT

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ROUND FLAT (MT) MATCH THROW



ACCESSORIES

- LPK#41** Liquid Propane (LP) conversion kit. Converts fire pit from Natural Gas to LP gas. Includes: Orifice / Air shutter, rating plate label sticker and instructions. For use with FPB- 29 / 34 / 44 DBSMT-N, 65,000 BTU
- MSI-BSMTI** Manual spark ignition kit for FPB series match throw systems featuring the burning spur. Kit includes: Mounting plate, spark igniter module, ignition hood, ignition hood screen, ignition rain shield, 2-probe spark igniter, burner rain shield and bracket, Ignition wiring and a AAA battery.
- VENT-6X12SS** Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- E-STOP** Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|--------------------------|----------|-------------|-----------------|----------|----------|---------|
| NEW FPB-20DBSMT-N | 19 3/4" | 16" | MT | Natural | 65,000 | N/A |
| FPB-29DBSMT-N | 29" | 22" | MT | Natural | 65,000 | N/A |
| FPB-34DBSMT-N | 34" | 22" | MT | Natural | 65,000 | N/A |
| FPB-44DBSMT-N | 44" | 22" | MT | Natural | 65,000 | N/A |

ROUND FLAT (NON-LISTED)



ACCESSORIES

- OAS-LP35** Propane conversion kit (Orifice / Air Shutter) for 22" burning spur. 99,000 BTU
- OAS-LP29** Propane conversion kit (Orifice / Air Shutter) for 31" burning spur. 150,000 BTU
- OAS-LP25** Propane conversion kit (Orifice / Air Shutter) for 36" burning spur. 182,000 BTU
- VENT-6X12SS** Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- E-STOP** Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|-----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-29DBS22MT-N | 29" | 22" | MT | Natural | 100,000 | N/A |
| FPB-34DBS31MT-N | 34" | 31" | MT | Natural | 160,000 | N/A |
| FPB-44DBS36MT-N | 44" | 36" | MT | Natural | 183,000 | N/A |

BURNER SYSTEMS

ROUND PAN



PICTURED: FPB-20SMT-N


⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

SQUARE PAN

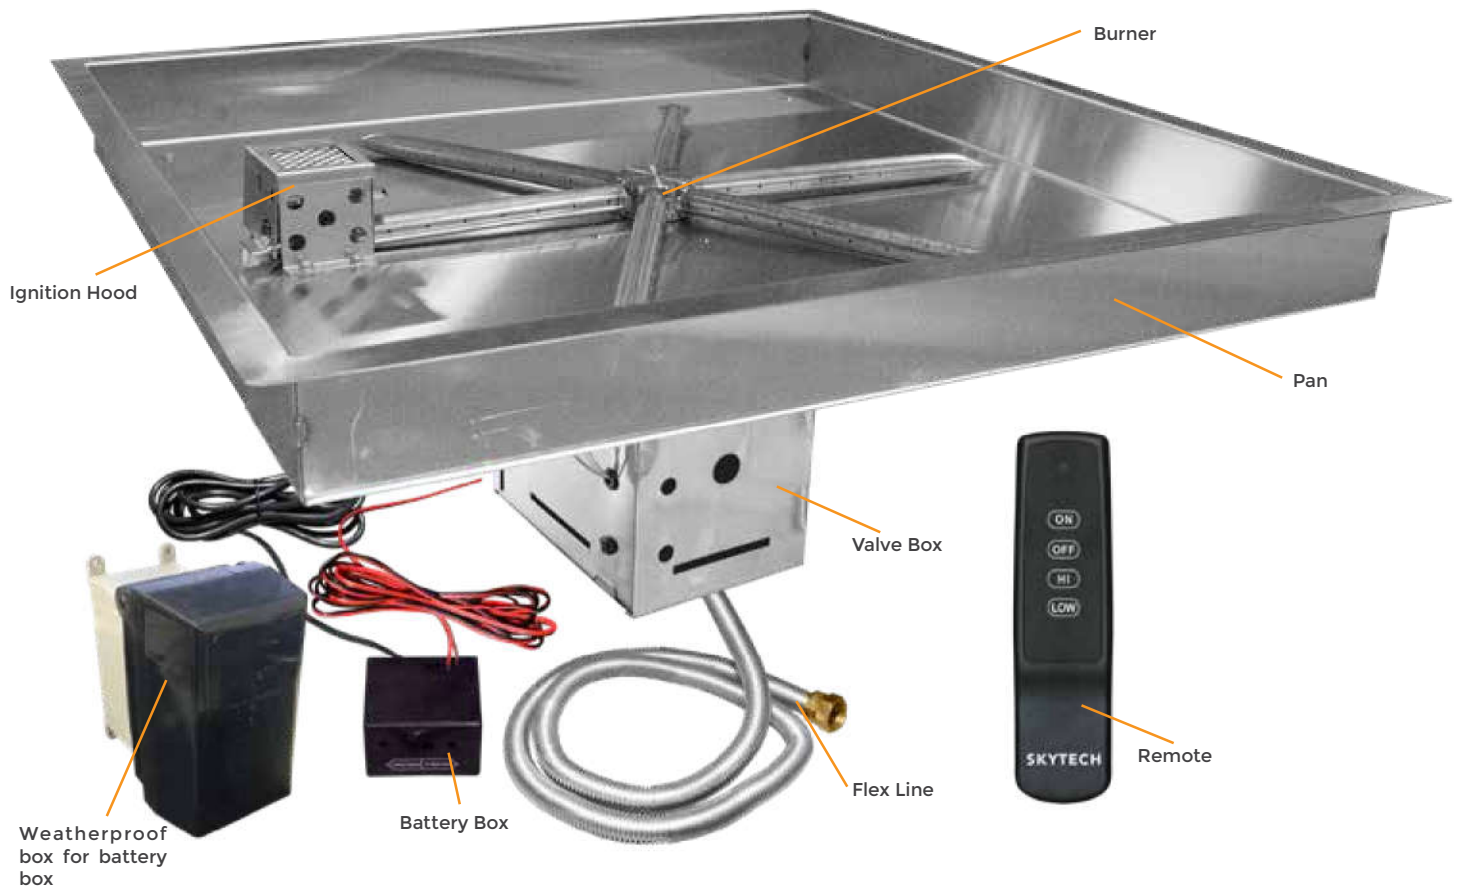

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FEATURES | OF THE TFS SYSTEM

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Thermocouple Flame Sense TFS technology with Reliable Direct Spark Ignition (Non Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Safety Valve turns gas OFF when flame goes out
- High / Low adjustable flame height
- Fully assembled and ready to install
- Each unit ships with a 46" tranquiline flex line and all fittings necessary for installation
- Warranty: Five (5) year on stainless steel components. Two (2) years on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS

SQUARE PAN

SQUARE (TFS) THERMOCOUPLE FLAME SENSE



ACCESSORIES

| | |
|-----------------|---|
| WS | Wired wall mount switch (On/Off) (pg. 73) |
| TM-R-AFITX | Wireless wall mount timer (30/60/120min) (pg. 73) |
| 1001D-AFITX | Wireless wall mount switch (On/Off) (pg. 73) |
| 1322WT | Wireless wall mount On/Off/High/Low transmitter (pg. 73) |
| AF-4000ADP24-80 | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems (pg. 73) |
| AF-4000HAT | Home/Pool Automation Transmitter system (pg. 73) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg. 83) |
| LIDS | Stainless Steel lids with brushed finish (pg. 75) |
| WINDSHIELDS | Tempered glass windshields (pg. 74) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-20SBSTFS-N | 20" | 16" | TFS | Natural | 80,000 | 48,000 |
| FPB-26SBSTFS-N | 26" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-32SBSTFS-N | 32" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-38SBSTFS-N | 38" | 22" | TFS | Natural | 105,000 | 51,500 |
| FPB-20SBSTFS-P | 20" | 16" | TFS | Propane | 79,000 | 47,400 |
| FPB-26SBSTFS-P | 26" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB-32SBSTFS-P | 32" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB38SBSTFS-P | 38" | 22" | TFS | Propane | 100,000 | 49,500 |

SQUARE (TMSI) THERMOCOUPLE MANUAL SAFETY with SPARK IGNITION



ACCESSORIES

| | |
|-------------|--|
| LPK#41 | Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB-20 / 26 / 32 / 38 SBSTMSI-N |
| WINDSHIELDS | Tempered glass windshields (pg. 74) |
| LIDS | Stainless Steel lids with brushed finish (pg. 75) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg. 83) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|-----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-20SBSTMSI-N | 20" | 16" | TMSI | Natural | 65,500 | N/A |
| FPB-26SBSTMSI-N | 26" | 22" | TMSI | Natural | 65,500 | N/A |
| FPB-32SBSTMSI-N | 32" | 22" | TMSI | Natural | 65,500 | N/A |
| FPB-38SBSTMSI-N | 38" | 22" | TMSI | Natural | 65,500 | N/A |

BURNER SYSTEMS

SQUARE PAN

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

SQUARE (MT) MATCH THROW



ACCESSORIES

| | |
|-------------|---|
| LPK#41 | Liquid Propane (LP) conversion kit. Converts fire pit from Natural Gas to LP gas. Includes: Orifice / Air shutter, rating plate label sticker and instructions. For use with FPB- 20 / 26 / 32 / 38 SBSMT-N, 65,000 BTU |
| MSI-BSMTI | Manual spark ignition kit for FPB series match throw systems featuring the burning spur. Kit includes: Mounting plate, spark igniter module, ignition hood, ignition hood screen, ignition rain shield, 2-probe spark igniter, burner rain shield and bracket, Ignition wiring and a AAA battery. |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |
| WINDSHIELDS | Tempered glass windshields (pg. 74) |
| LIDS | Stainless Steel lids with brushed finish (pg. 75) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|---------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-20SBSMT-N | 20" | 16" | MT | Natural | 65,000 | N/A |
| FPB-26SBSMT-N | 26" | 22" | MT | Natural | 65,000 | N/A |
| FPB-32SBSMT-N | 32" | 22" | MT | Natural | 65,000 | N/A |
| FPB-38SBSMT-N | 38" | 22" | MT | Natural | 65,000 | N/A |

SQUARE (NON-LISTED)



ACCESSORIES

| | |
|-------------|---|
| OAS-LP35 | Propane conversion kit (Orifice / Air Shutter) for 22" burning spur. 99,000 BTU |
| OAS-LP29 | Propane conversion kit (Orifice / Air Shutter) for 31" burning spur. 150,000 BTU |
| OAS-LP25 | Propane conversion kit (Orifice / Air Shutter) for 36" burning spur. 182,000 BTU |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |
| WINDSHIELDS | Tempered glass windshields (pg. 74) |
| LIDS | Stainless Steel lids with brushed finish (pg. 75) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|-----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-26SBS22MT-N | 26" | 22" | MT | Natural | 100,000 | N/A |
| FPB-32SBS31MT-N | 32" | 31" | MT | Natural | 160,000 | N/A |
| FPB-38SBS36MT-N | 38" | 36" | MT | Natural | 183,000 | N/A |

BURNER SYSTEMS

SQUARE FLAT



⚠ WARNING! | CALIFORNIA PROPOSITION 65


This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

SQUARE FLAT

NEW

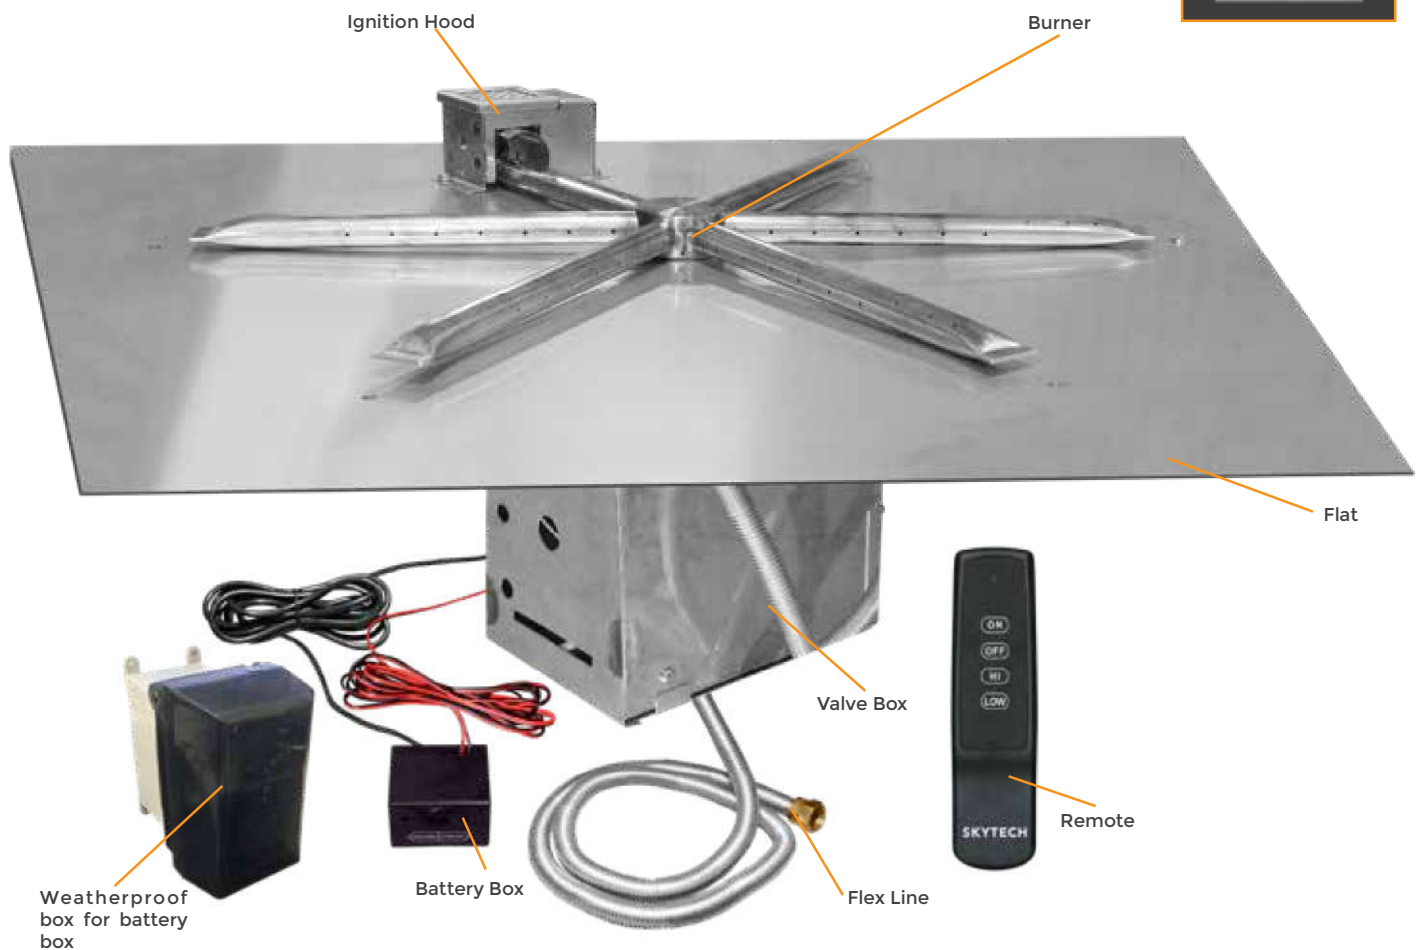

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FEATURES | OF THE TFS SYSTEM

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Thermocouple Flame Sense TFS technology with Reliable Direct Spark Ignition (Non Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Safety Valve turns gas OFF when flame goes out
- High / Low adjustable flame height
- Fully assembled and ready to install
- Each unit ships with a 46" tranquiline flex line and all fittings necessary for installation
- Warranty: Five (5) year on stainless steel components. Two (2) years on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS

SQUARE FLAT

SQUARE FLAT (TFS) THERMOCOUPLE FLAME SENSE




ACCESSORIES

| | |
|-----------------|---|
| WS | Wired wall mount switch (On/Off) (pg. 73) |
| TM-R-AFITX | Wireless wall mount timer (30/60/120min) (pg. 73) |
| 1001D-AFITX | Wireless wall mount switch (On/Off) (pg. 73) |
| 1322WT | Wireless wall mount On/Off/High/Low transmitter (pg. 73) |
| AF-4000ADP24-80 | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems (pg. 73) |
| AF-4000HAT | Home/Pool Automation Transmitter system (pg. 73) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|-----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-25SFBSTFS-N | 25" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-30SFBSTFS-N | 30" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-34SFBSTFS-N | 34" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-40SFBSTFS-N | 40" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-46SFBSTFS-N | 46" | 22" | TFS | Natural | 105,000 | 51,000 |
| FPB-25SFBSTFS-P | 25" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB-30SFBSTFS-P | 30" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB-34SFBSTFS-P | 34" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB-40SFBSTFS-P | 40" | 22" | TFS | Propane | 100,000 | 49,500 |
| FPB-46SFBSTFS-P | 46" | 22" | TFS | Propane | 100,000 | 49,500 |

SQUARE FLAT (TMSI) THERMOCOUPLE MANUAL SAFETY with SPARK IGNITION

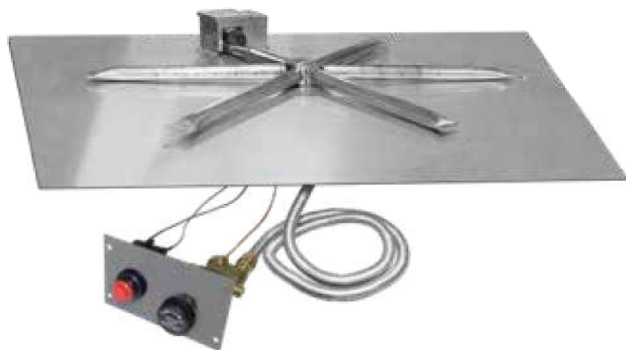

ACCESSORIES

| | |
|-------------|--|
| LPK#41 | Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB-25 / 30 / 34 / 40 / 46 SFBSTMSI-SI-N |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|------------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-25SFBSTMSI-N | 25" | 22" | TMSI | Natural | 65,000 | N/A |
| FPB-30SFBSTMSI-N | 30" | 22" | TMSI | Natural | 65,500 | N/A |
| FPB-34SFBSTMSI-N | 34" | 22" | TMSI | Natural | 65,500 | N/A |
| FPB-40SFBSTMSI-N | 40" | 22" | TMSI | Natural | 65,500 | N/A |
| FPB-46SFBSTMSI-N | 46" | 22" | TMSI | Natural | 65,500 | N/A |

BURNER SYSTEMS

SQUARE FLAT


⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

SQUARE FLAT (MT) MATCH THROW

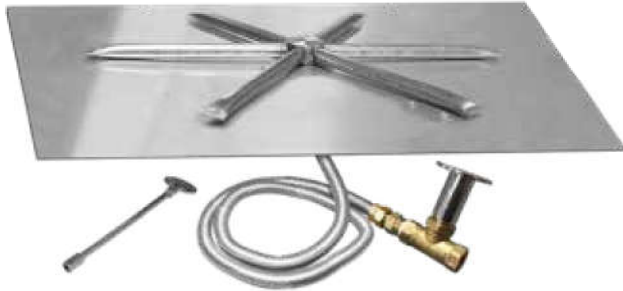


ACCESSORIES

- LPK#41** Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB- 25 / 30 / 34 / 40 / 46 FBSMT
- VENT-6X12SS** Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- E-STOP** Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|----------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-25SFBSMT-N | 25" | 22" | MT | Natural | 65,000 | N/A |
| FPB-30SFBSMT-N | 30" | 22" | MT | Natural | 65,000 | N/A |
| FPB-34SFBSMT-N | 34" | 22" | MT | Natural | 65,000 | N/A |
| FPB-40SFBSMT-N | 40" | 22" | MT | Natural | 65,000 | N/A |
| FPB-46SFBSMT-N | 46" | 22" | MT | Natural | 65,000 | N/A |

SQUARE FLAT (NON-LISTED)

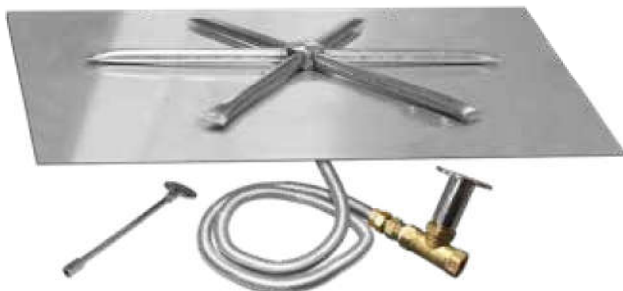

ACCESSORIES

- OAS-LP35** Propane conversion kit (Orifice / Air Shutter) for 22" burning spur. 99,000 BTU
- OAS-LP29** Propane conversion kit (Orifice / Air Shutter) for 31" burning spur. 150,000 BTU
- OAS-LP25** Propane conversion kit (Orifice / Air Shutter) for 36" burning spur. 182,000 BTU
- VENT-6X12SS** Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- E-STOP** Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|------------------|----------|-------------|-----------------|----------|----------|---------|
| FPB-25SFBS22MT-N | 25" | 22" | MT | Natural | 100,000 | N/A |
| FPB-30SFBS22MT-N | 30" | 22" | MT | Natural | 100,000 | N/A |
| FPB-34SFBS31MT-N | 34" | 31" | MT | Natural | 160,000 | N/A |
| FPB-40SFBS36MT-N | 40" | 36" | MT | Natural | 183,000 | N/A |
| FPB-46SFBS36MT-N | 46" | 36" | MT | Natural | 183,000 | N/A |

BURNER SYSTEMS

L-SERIES



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

PICTURED: Five (5) FPB-36LTFS-N | Two sets end-to-end with one in the middle

L-SERIES



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FEATURES | OF THE TFS SYSTEM

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories (UL)
- Thermocouple Flame Sense TFS technology (Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Safety Valve turns gas OFF when flame goes out
- High / Low adjustable flame height
- Fully assembled and ready to install
- Each unit ships with a 46" tranquiline flex line and all fittings necessary for installation
- Warranty: Five (5) year on stainless steel components. Two (2) years on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)


⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS L-SERIES

COMBINING L-SERIES

The L-Series has been designed to be able to fit two models end to end to create your desired length of burner. On the end of the L-Series burner system there is an extension bracket. By taking off the extension bracket on each unit you are able to connect the ends and create a flush finish. Combine any 24 / 30 / 36 inch system with one another to create your custom burner system.

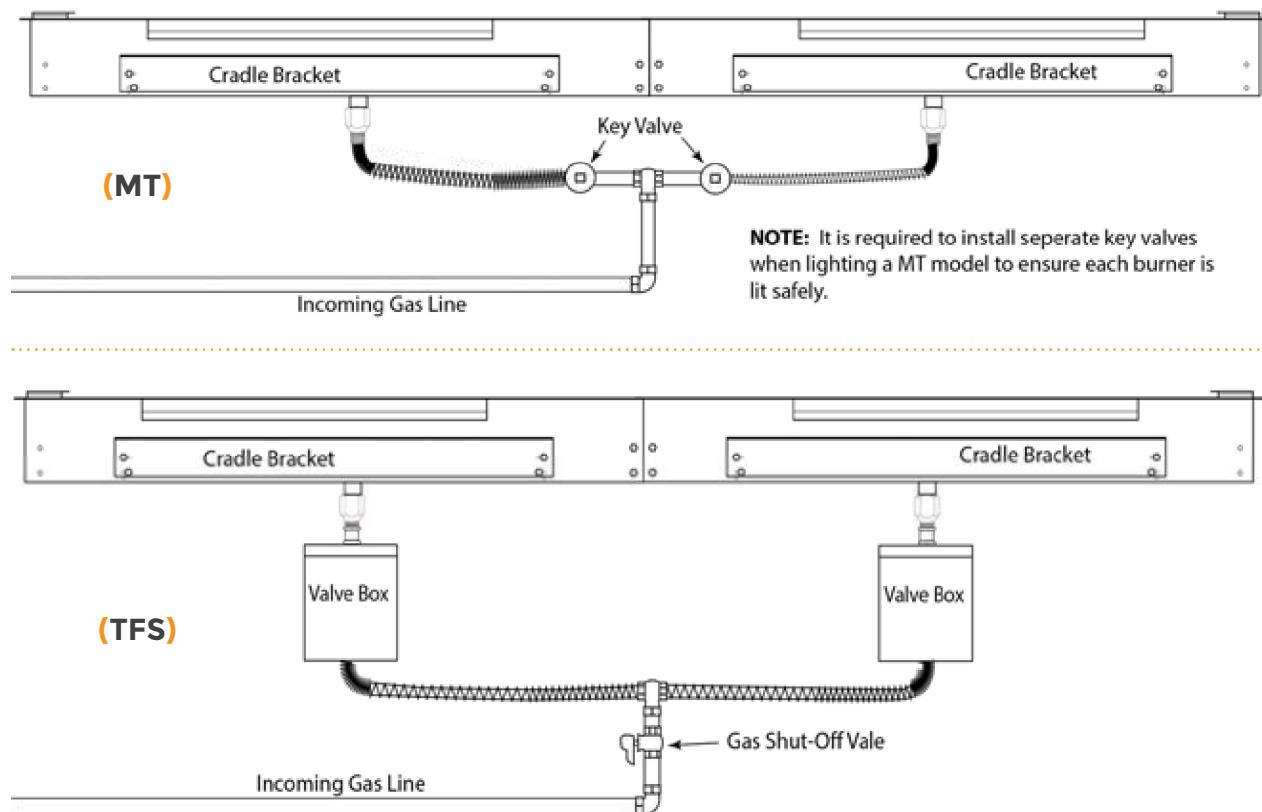

HEIGHT CONTROL

Each L-Series burner system comes with two (2) cradle brackets that attach to each side of the unit. These cradle brackets are adjustable so that you can achieve your desired height in order for the burner system to be flush with the surrounding enclosure.



TRIM

We offer a 3/4" decorative brushed stainless steel trim piece to accent the L-Series burner system. We have in stock all the trim sizes to fit any L-Series or L-Series combination.



| | |
|----------|------------------------------------|
| TRIM-L24 | fits FPB-24L Series |
| TRIM-L30 | fits FPB-30L Series |
| TRIM-L36 | fits FPB-36L Series |
| TRIM-L48 | fits (2) FPB-24L Series end-to-end |
| TRIM-L60 | fits (2) FPB-30L Series end-to-end |
| TRIM-L72 | fits (2) FPB-36L Series end-to-end |

BURNER SYSTEMS

L-SERIES

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

L-SERIES (TFS) THERMOCOUPLE FLAME SENSE



ACCESSORIES

| | |
|-----------------|---|
| WS | Wired wall mount switch (On/Off) (pg. 73) |
| TM-R-AFITX | Wireless wall mount timer (30/60/120min) (pg. 73) |
| 1001D-AFITX | Wireless wall mount switch (On/Off) (pg. 73) |
| 1322WT | Wireless wall mount On/Off/High/Low transmitter (pg. 73) |
| AF-4000ADP24-80 | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems (pg. 73) |
| AF-4000HAT | Home/Pool Automation Transmitter system (pg. 73) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |
| LIDS | Stainless Steel lids with brushed finish (pg. 75) |
| WINDSHIELDS | Tempered glass windshields (pg. 74) |
| TRIM | 3/4" stainless steel decorative trim (pg. 34) |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |

| MODEL | PAN SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|--------------|----------|-----------------|----------|----------|---------|
| FPB-24LTFS-N | 24" | TFS | Natural | 35,000 | 20,000 |
| FPB-30LTFS-N | 30" | TFS | Natural | 42,000 | 23,000 |
| FPB-36LTFS-N | 36" | TFS | Natural | 55,000 | 37,000 |
| FPB-24LTFS-P | 24" | TFS | Propane | 35,000 | 20,000 |
| FPB-30LTFS-P | 30" | TFS | Propane | 42,000 | 23,000 |
| FPB-36LTFS-P | 36" | TFS | Propane | 55,000 | 37,000 |

L-SERIES (MT) MATCH THROW



ACCESSORIES

| | |
|-------------|--|
| LPK#50 | Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB-24LMT-N, 35,000 BTU |
| LPK#48 | Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB-30LMT-N, 45,000 BTU |
| LPK#44 | Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice / Air Shutter, rating plate label sticker and instructions. For use with FPB-36LMT-N, 55,000 BTU |
| E-STOP | Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72) |
| VENT-6X12SS | Two (2) Stainless Steel 6" H x 12" W vents (pg.83) |
| LIDS | Stainless steel lids with brushed finish (pg. 75) |
| WINDSHIELDS | Tempered glass windshields (pg. 74) |
| TRIM | 3/4" stainless steel decorative trim (pg. 34) |

| MODEL | PAN SIZE | IGNITION SYSTEM | GAS TYPE | BTU HIGH | BTU LOW |
|-------------|----------|-----------------|----------|----------|---------|
| FPB-24LMT-N | 24" | MT | Natural | 35,000 | N/A |
| FPB-30LMT-N | 30" | MT | Natural | 45,000 | N/A |
| FPB-36LMT-N | 36" | MT | Natural | 55,000 | N/A |

⚠ WARNING! | CALIFORNIA PROPOSITION 65


This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNER SYSTEMS

LINE OF FIRE

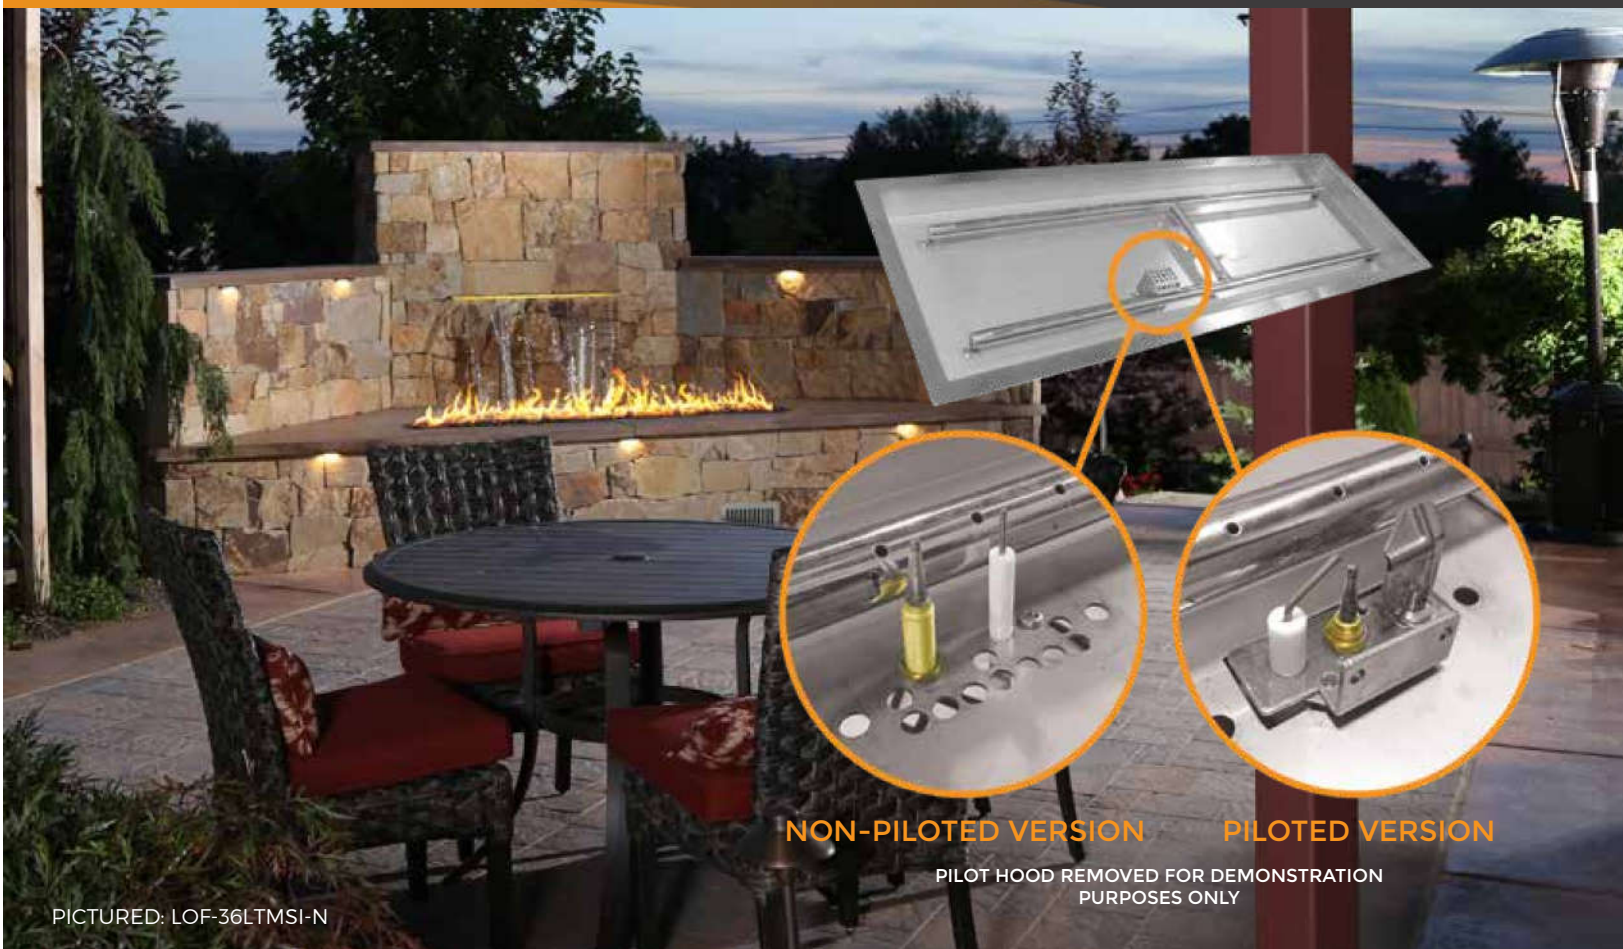

PICTURED: LOF-36LTMSI-N

LINE OF FIRE - H BURNER (TMSI) THERMOCOUPLE MANUAL SAFETY with SPARK IGNITION



ACCESSORIES

- LOF-BO-LP40** Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. For use with LOF-30LHTMSI-N and LOF-36LHTMSI-N
- LOF-BOPO-LP21** Liquid propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. For use with LOF-48LHTMSI-N
- VENT-6X12SS** Two (2) Stainless Steel 6" H x 12" W vents (pg. 83)
- LIDS** Stainless Steel lids with brushed finish (pg. 75)
- WINDSHIELDS** Tempered glass windshields (pg. 74)
- E-STOP** Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)

| MODEL | PAN SIZE | | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU (NG) |
|----------------|----------------------------|--------------------------------|-------------|-----------------|----------|----------|
| LOF-30LHTMSI-N | 30" L x 10" W (inside dim) | 31 1/2" L x 12 1/2" W (w/ lip) | 26" x 6" | TMSI | Natural | 65,000 |
| LOF-36LHTMSI-N | 36" L x 12" W (inside dim) | 38 1/2" L x 14 1/2" W (w/ lip) | 32" x 8" | TMSI | Natural | 65,000 |
| LOF-48LHTMSI-N | 48" L x 14" W (inside dim) | 50 1/2" L x 16 1/2" W (w/ lip) | 44" x 10" | TMSI (PILOTED) | Natural | 145,000 |

BURNER SYSTEMS LINE OF FIRE

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

LINE OF FIRE - T BURNER (TMSI) THERMOCOUPLE MANUAL SAFETY with SPARK IGNITION



ACCESSORIES

- LOF-BO-LP40 Liquid Propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. For use with LOF-30LTTMSI-N and LOF-36LTTMSI-N
- LOF-BOPO-LP21 Liquid Propane (LP) conversion kit. Converts fire pit from Natural Gas to LP Gas. For use with LOF-48LTTMSI-N and LOF-60LTTMSI-N
- VENT-6X12SS Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- LIDS Stainless Steel lids with brushed finish (pg. 75)
- WINDSHIELDS Tempered glass windshields (pg. 74)
- E-STOP Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)

| MODEL | | PAN SIZE | | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU (NG) |
|----------------|---------------------------|-------------------------------|-----|----------------|-----------------|----------|----------|
| LOF-30LTTMSI-N | 30" L x 6" W (inside dim) | 32 1/2" L x 8 1/2" W (w/ lip) | 27" | TMSI | Natural | 65,000 | |
| LOF-36LTTMSI-N | 36" L x 6" W (inside dim) | 38 1/2" L x 8 1/2" W (w/ lip) | 33" | TMSI | Natural | 65,000 | |
| LOF-48LTTMSI-N | 48" L x 6" W (inside dim) | 50 1/2" L x 8 1/2" W (w/ lip) | 45" | TMSI (PILOTED) | Natural | 145,000 | |
| LOF-60LTTMSI-N | 60" L x 6" W (inside dim) | 62 1/2" L x 8 1/2" W (w/ lip) | 47" | TMSI (PILOTED) | Natural | 145,000 | |

LINE OF FIRE (MT) MATCH THROW



ACCESSORIES

- OAS-LP49 Propane conversion kit (Orifice / Air Shutter) for LOF-30MT-N
- OAS-LP41 Propane conversion kit (Orifice / Air Shutter) for LOF-36MT-N
- VENT-6X12SS Two (2) Stainless Steel 6" H x 12" W vents (pg.83)
- LIDS Stainless Steel lids with brushed finish (pg. 75)
- WINDSHIELDS Tempered glass windshields (pg. 74)
- E-STOP Mechanical gas timer valve with manual emergency shut-off. Available in 1 hr and 2.5 hr models (pg. 72)

| MODEL | PAN SIZE | BURNER SIZE | IGNITION SYSTEM | GAS TYPE | BTU (NG) |
|------------|----------------------------------|-------------|-----------------|----------|----------|
| LOF-30MT-N | 32 1/4" L x 8" W (including lip) | 30" | MT | Natural | 45,000 |
| LOF-36MT-N | 38 1/4" L x 8" W (including lip) | 36" | MT | Natural | 65,000 |

BURNERS




⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

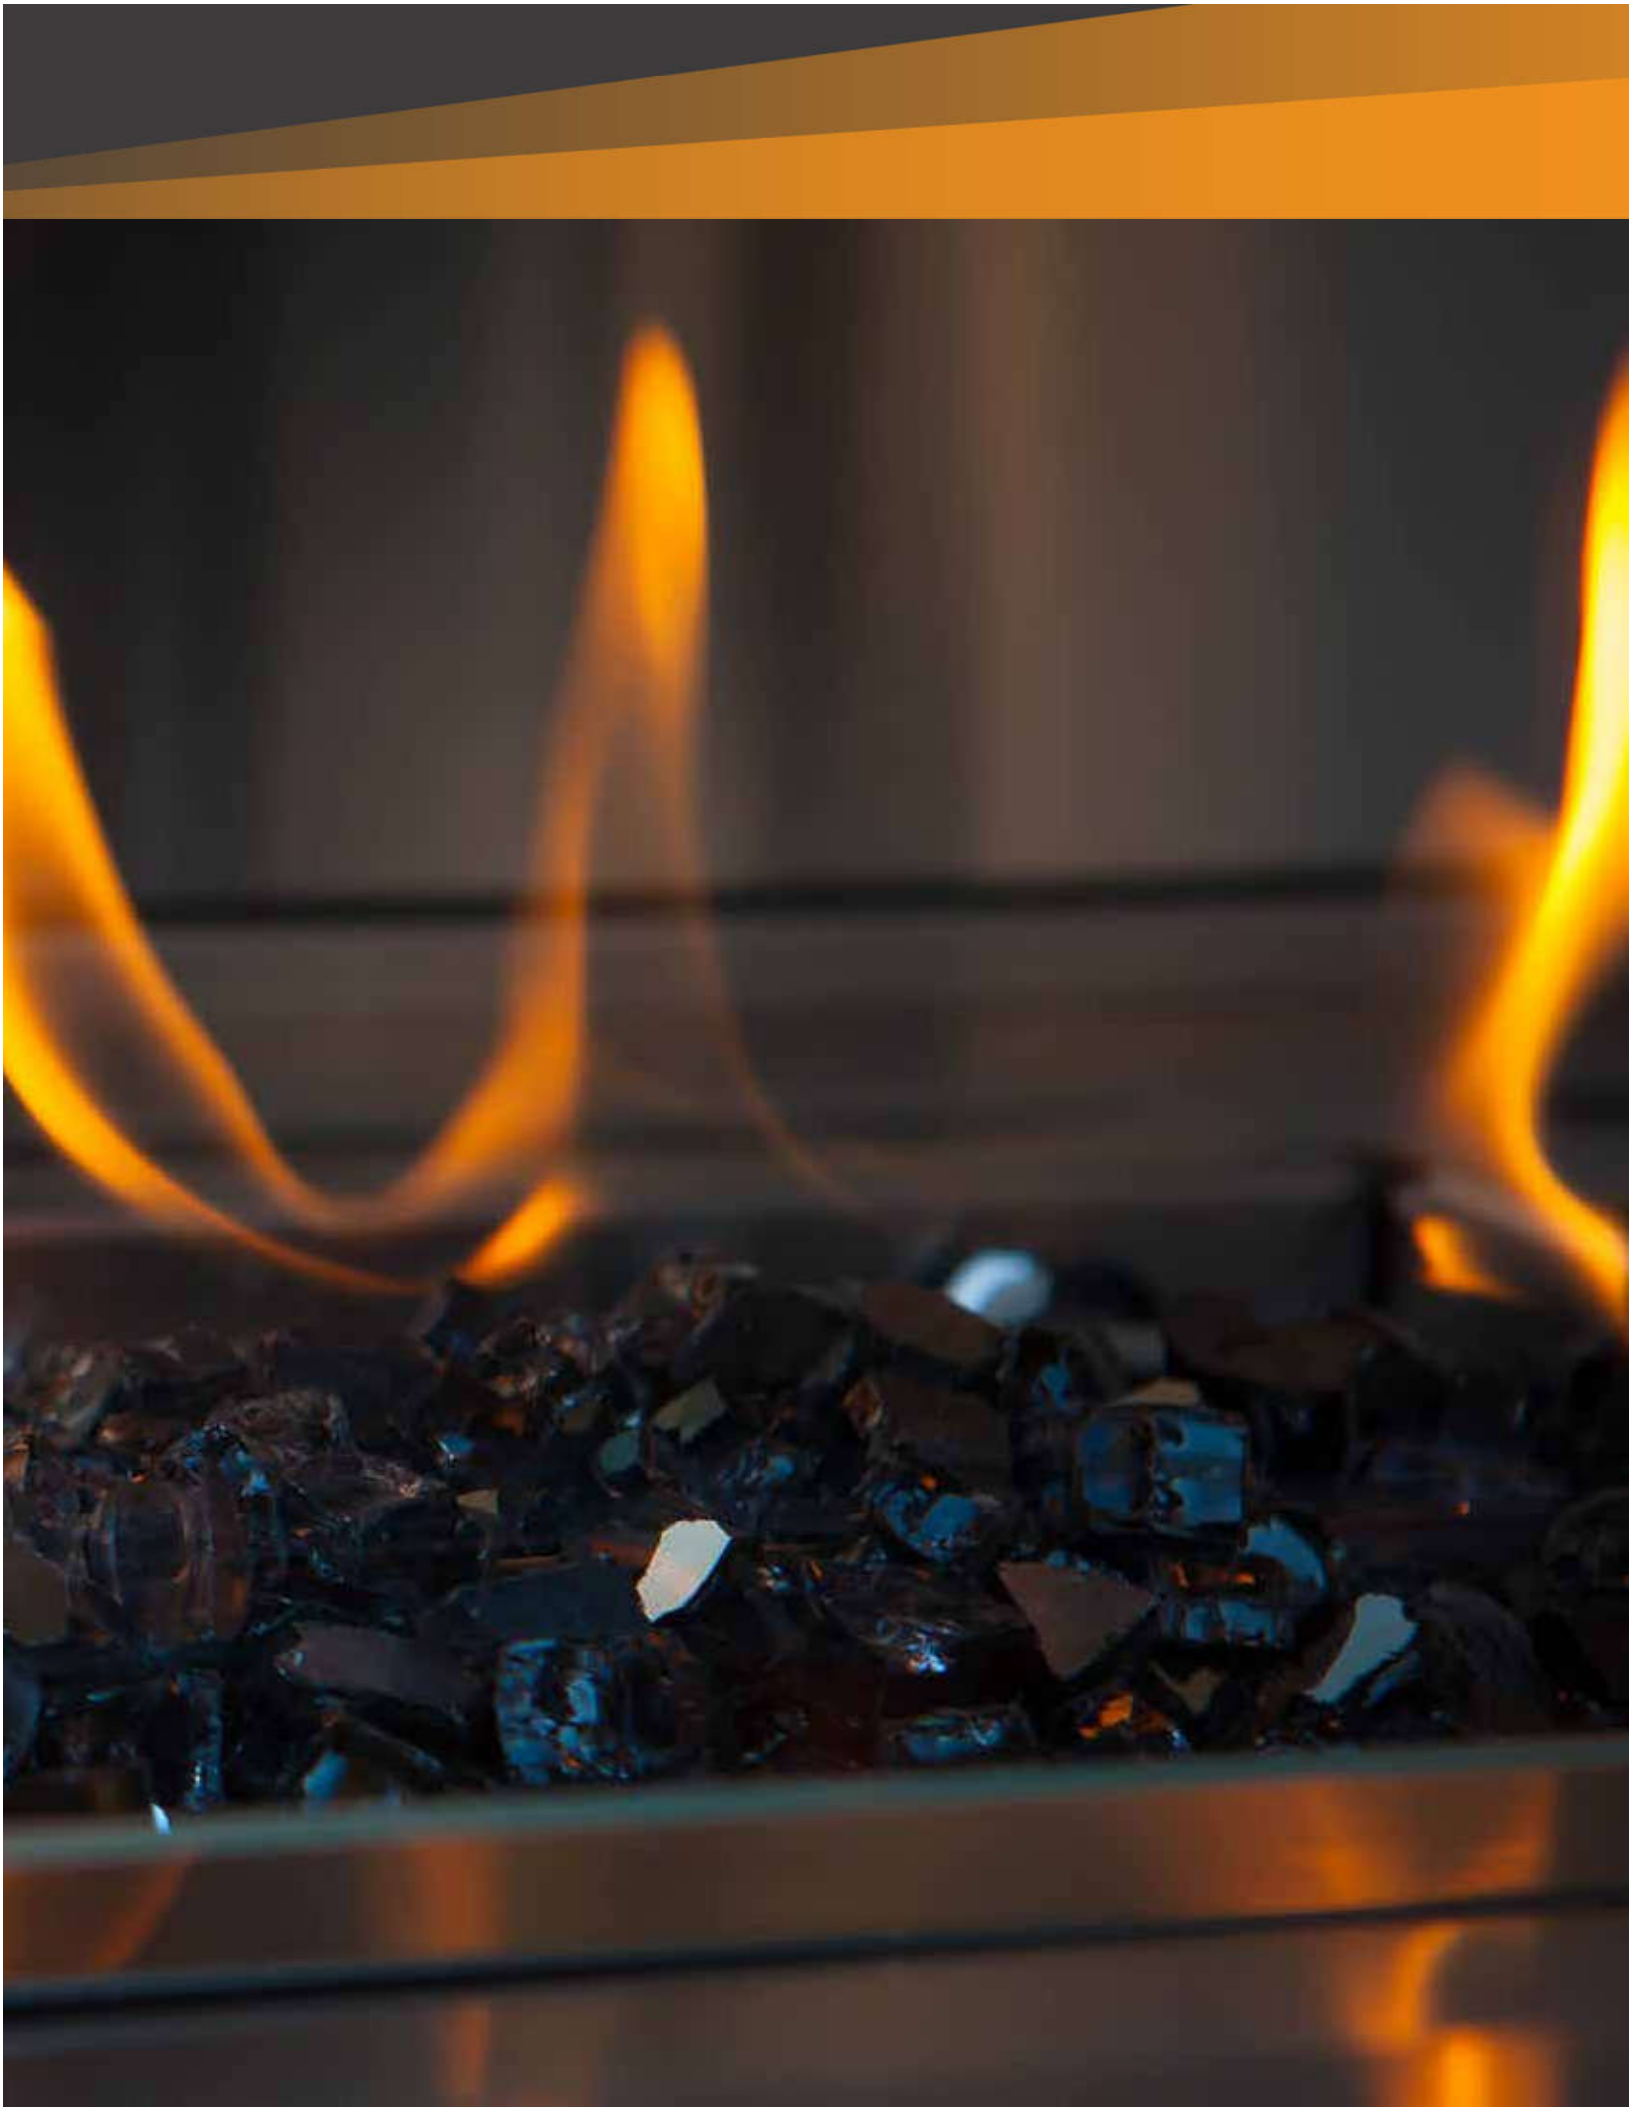

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

BURNERS
SPUR




BURNING SPUR



ABOUT

For a natural-looking flame that mimics a wood-burning fire, the Burning Spur's innovative design and superior construction (made of 304 stainless steel) is the choice of outdoor fire professionals. Backed by our five (5) year warranty, Firegear Burning Spur's will keep the fire going strong, season after season.

To design the ultimate campfire feature, choose the Burning Spur, Burning Spur kit or pan/disc burner system that fits your design and ignition system. Pans and burners are available in a range of sizes, from 16" to 36".

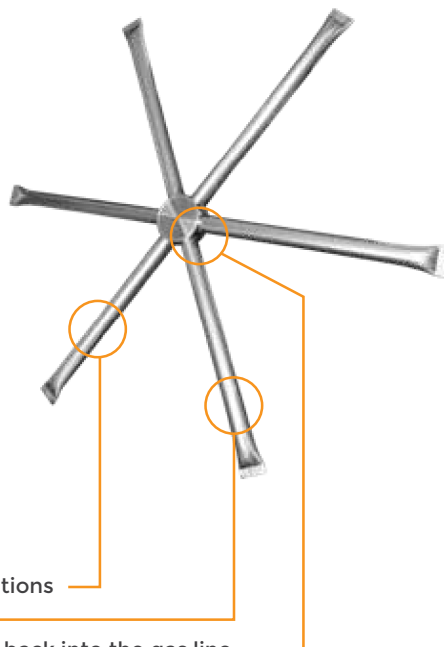

FEATURES

- Constructed of corrosion resistant 304 stainless steel to perform in all weather conditions
- Every leg has been specifically designed to be able to house an ignition system
- Internal dam built inside the center of the Burning Spur helps prohibit water flowing back into the gas line
- The legs feature a pitched design letting water run off easily
- The bottom hub features weep holes for water release so there is no freeze / thaw damage
- LP conversion kits available in order to convert from Natural Gas to Propane
- Cooling points between each spur leg helps prevent heat transfer to the outer edge
- We offer a consumer warranty of five (5) years, also a commercial warranty of one (1) year
- The stock sizes come in 12", 16", 22", 31", 36" (measured tip to tip)

SPUR KITS



KIT INCLUDES

Burner, Orifice, Stainless Steel Tranquiline Gas Flex, Fittings, Key Valve, Polished Chrome Cover and 12" Polished Chrome Key

| MODEL | DESCRIPTION | LP ORIFICE | BTU NATURAL GAS | BTU PROPANE |
|---------|--|------------|-----------------|-------------|
| DBS-12K | 12" - 304 Stainless Steel Burning Spur | OAS-LP52 | 42,000 Btu | 33,000 Btu |
| DBS-16K | 16" - 304 Stainless Steel Burning Spur | OAS-LP45 | 60,000 Btu | 55,000 Btu |
| DBS-22K | 22" - 304 Stainless Steel Burning Spur | OAS-LP35 | 100,000 Btu | 99,000 Btu |
| DBS-31K | 31" - 304 Stainless Steel Burning Spur | OAS-LP29 | 160,000 Btu | 150,000 Btu |
| DBS-36K | 36" - 304 Stainless Steel Burning Spur | OAS-LP25 | 183,000 Btu | 182,000 Btu |

SPUR ONLY



INCLUDES

Burner, Orifice, 1/2" Flare x 1/2" OD FIP

| MODEL | DESCRIPTION | LP ORIFICE | BTU NATURAL GAS | BTU PROPANE |
|--------|--|------------|-----------------|-------------|
| DBS-12 | 12" - 304 Stainless Steel Burning Spur | OAS-LP52 | 42,000 Btu | 33,000 Btu |
| DBS-16 | 16" - 304 Stainless Steel Burning Spur | OAS-LP45 | 60,000 Btu | 55,000 Btu |
| DBS-22 | 22" - 304 Stainless Steel Burning Spur | OAS-LP35 | 100,000 Btu | 99,000 Btu |
| DBS-31 | 31" - 304 Stainless Steel Burning Spur | OAS-LP29 | 160,000 Btu | 150,000 Btu |
| DBS-36 | 36" - 304 Stainless Steel Burning Spur | OAS-LP25 | 183,000 Btu | 182,000 Btu |

FIRE RING KITS



FEATURES

Constructed of 304 Stainless Steel

Burner ports are drilled, not punched for an improved, quieter burner

Ships as Natural Gas (NG), Liquid Propane (LP) conversion kits available

KIT INCLUDES

304 stainless steel fire ring, orifice (NG), tranquiline stainless steel gas flex line, key valve, polished chrome key valve cover and 12" polished chrome key, fittings

| MODEL | RING SIZE | DESCRIPTION | BTU (NG) | HUB SIZE | LP CON. KIT | BTU (LP) |
|-------------|-----------|---|---------------|-----------|--------------|----------|
| FG-FR-6SSK | 6" | 6" single ring stainless steel ring burner kit | 42,000 | 1/2" NPT | FR-OAS-LPK52 | 33,000 |
| FG-FR-12SSK | 12" | 12" double ring stainless steel ring burner kit | 42,000 | 1/2" NPT | FR-OAS-LPK52 | 33,000 |
| FG-FR-18SSK | 18" | 18" double ring stainless steel ring burner kit | 60,000 | 1/2" NPT | FR-OAS-LPK45 | 55,000 |
| FG-FR-24SSK | 24" | 24" double ring stainless steel ring burner kit | 100,000 | 1/2" NPT | FR-OAS-LPK35 | 99,000 |
| FG-FR-30SSK | 30" | 30" triple ring stainless steel ring burner kit | up to 300,000 | *3/4" NPT | FR-OAS-LPK4 | 300,000 |
| FG-FR-36SSK | 36" | 36" triple ring stainless steel ring burner kit | up to 300,000 | *3/4" NPT | FR-OAS-LPK4 | 300,000 |
| FG-FR-48SSK | 48" | 48" triple ring stainless steel ring burner kit | up to 300,000 | *3/4" NPT | FR-OAS-LPK4 | 300,000 |

* Includes 3/4" to 1/2" adapter, no orifice included

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Nickel, which is known to the state of California to cause cancer. (For more information, go to www.p65warnings.ca.gov)

FIRE RING ONLY



FEATURES

Constructed of 304 Stainless Steel

Burner ports are drilled, not punched for an improved, quieter burner

Ships as Natural Gas (NG), Liquid Propane (LP) conversion kits available

INCLUDES

304 stainless steel fire ring with orifice (NG) - 30 / 36 / 48 orifice not included

| MODEL | RING SIZE | DESCRIPTION | BTU (NG) | HUB SIZE | LP CON. KIT | BTU (LP) |
|------------|-----------|---|---------------|----------|--------------|----------|
| FG-FR-6SS | 6" | 6" single ring stainless steel ring burner | 42,000 | 1/2" NPT | FR-OAS-LPK52 | 33,000 |
| FG-FR-12SS | 12" | 12" double ring stainless steel ring burner | 42,000 | 1/2" NPT | FR-OAS-LPK52 | 33,000 |
| FG-FR-18SS | 18" | 18" double ring stainless steel ring burner | 60,000 | 1/2" NPT | FR-OAS-LPK45 | 55,000 |
| FG-FR-24SS | 24" | 24" double ring stainless steel ring burner | 100,000 | 1/2" NPT | FR-OAS-LPK35 | 99,000 |
| FG-FR-30SS | 30" | 30" triple ring stainless steel ring burner | up to 300,000 | 3/4" NPT | FR-OAS-LPK4 | 300,000 |
| FG-FR-36SS | 36" | 36" triple ring stainless steel ring burner | up to 300,000 | 3/4" NPT | FR-OAS-LPK4 | 300,000 |
| FG-FR-48SS | 48" | 48" triple ring stainless steel ring burner | up to 300,000 | 3/4" NPT | FR-OAS-LPK4 | 300,000 |



When building a fire pit for use with LP gas, understanding the properties of Liquid Propane is important. Propane is denser than air. Liquid Propane will have a tendency to sink into any enclosed area and thus poses a risk of explosion and fire. Because of this risk we strongly recommend you build your fire pit incorporating the use of a pan or flat. When sizing fire rings, the ring should be at least 6" smaller than the inside dimensions of your enclosure and must be installed with burner ports facing upwards.

BURNERS

H

H BURNER KITS



FEATURES

Constructed of 304 Stainless Steel

Burner ports are drilled, not punched for an improved, quieter burner

Ships as Natural Gas (NG), Liquid Propane (LP) conversion kits available

Easy to install center gas inlet

KIT INCLUDES

304 stainless steel "H" style burner, orifice (NG), tranquiline stainless steel flex line, key valve, polished chrome key valve cover and 12" polished chrome key, fittings



| MODEL | SIZE | DESCRIPTION | BTU (NG) | LP CON. KIT | BTU (LP) |
|------------|----------|--------------------------------|----------|-------------|----------|
| FG-H-24SSK | 24" x 6" | H style stainless steel burner | 90,000 | H-OAS-LP37 | 88,000 |
| FG-H-30SSK | 30" x 6" | H style stainless steel burner | 120,000 | H-OAS-LP31 | 117,000 |
| FG-H-36SSK | 36" x 6" | H style stainless steel burner | 150,000 | H-OAS-LP29 | 150,000 |
| FG-H-48SSK | 48" x 6" | H style stainless steel burner | 170,000 | H-OAS-LP27 | 168,500 |

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

H BURNER ONLY



FEATURES

Constructed of 304 Stainless Steel

Burner ports are drilled, not punched for an improved, quieter burner

Ships as Natural Gas (NG), Liquid Propane (LP) conversion kits available

Easy to install center gas inlet

INCLUDES

304 stainless steel rectangular "H" style burner with orifice (NG)



| MODEL | SIZE | DESCRIPTION | BTU (NG) | LP CON. KIT | BTU (LP) |
|-----------|----------|--------------------------------|----------|-------------|----------|
| FG-H-24SS | 24" x 6" | H style stainless steel burner | 90,000 | H-OAS-LP37 | 88,000 |
| FG-H-30SS | 30" x 6" | H style stainless steel burner | 120,000 | H-OAS-LP31 | 117,000 |
| FG-H-36SS | 36" x 6" | H style stainless steel burner | 150,000 | H-OAS-LP29 | 150,000 |
| FG-H-48SS | 48" x 6" | H style stainless steel burner | 170,000 | H-OAS-LP27 | 168,500 |




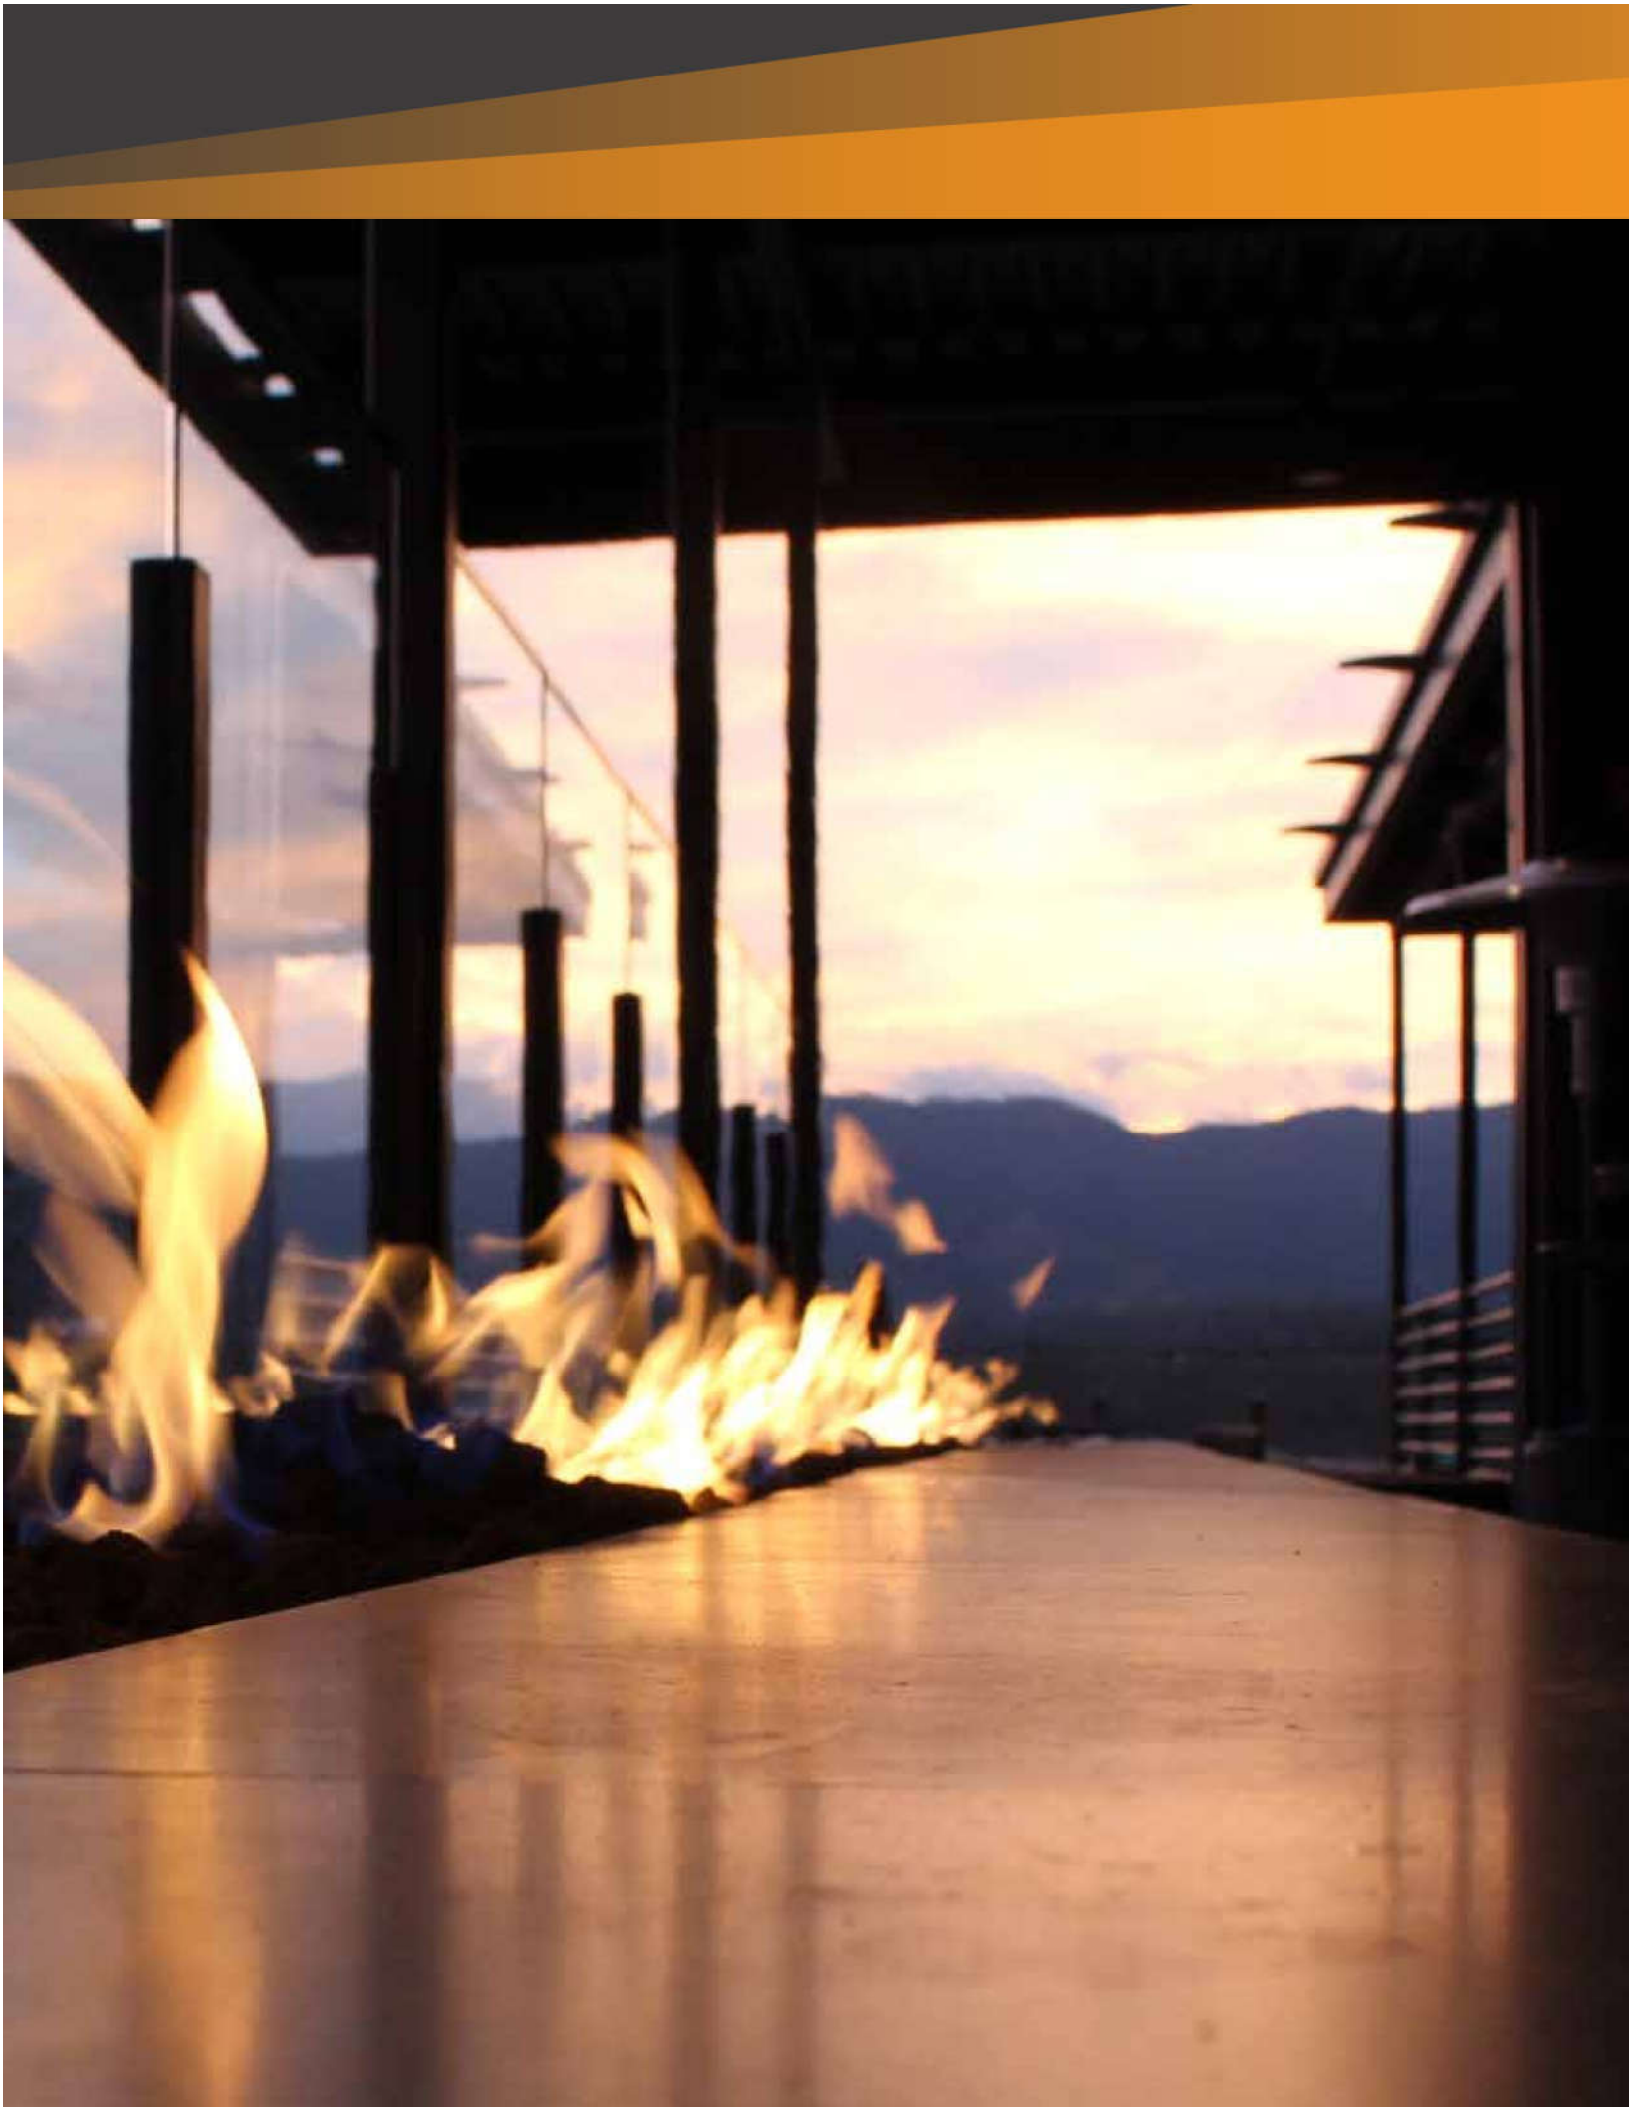
When building a fire pit for use with LP gas, understanding the properties of Liquid Propane is important. Propane is denser than air. Liquid Propane will have a tendency to sink into any enclosed area and thus poses a risk of explosion and fire. Because of this risk we strongly recommend you build your fire pit incorporating the use of a pan or flat.

AnF



PICTURED: ANFL-96

 **WARNING! | CALIFORNIA PROPOSITION 65**
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)



AnF
FIRE PIT ENCLOSURES



PICTURED: ANF-L48 | FPB-30LMT-N

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

AnF (Assemble & Finish)

POWDER COATED

All steel is powder coated with Zinc Epoxy Primer which is engineered to protect from the outdoor elements. This type of powder coating is used in a number of applications including automotive.

BUILT TO LAST

Each AnF unit is built to last having been tested with 700 lbs, without structural failure and backed by a 5 Year Limited Warranty.



EXTERIOR

The exterior panels are factory clad with 1/2" Permabase cement board. Permabase is impact resistant, extremely durable and dimensionally stable. It has overall flexural, compressive and tensile strength characteristics, highly moisture resistant and will not rot, disintegrate or swell when exposed to water.

FRAMEWORK

The AnF framework is constructed of 16 gauge galvanized steel



LEVELING LEGS

Heavy duty zinc plated leveling legs with large flat bottom for stability.

KNOCKDOWN

Knockdown design for ease of installation

FEATURES

- Available in round, square and linear styles
- Simple assembly, typically around 30 minutes or less
- Automotive quality powder coat finish on all metal parts
- Supports up to 700 lbs.
- Heavy duty leveling legs with large flat pads
- Custom designed packaging protects the AnF from shipping damage
- Custom skid allows for stacking up to 3 high (Round Design)
- Knockdown design for ease of installation
- Individual sections are easily transported to the job site
- No heavy equipment required
- Each model includes two (2) Stainless Steel 12" x 6" vents to provide the required 18 square inches of cross ventilation (not installed)
- 5 Year Limited Warranty

ASSEMBLY

Using the 8 screws for the body, 8 screws for the pan supports, and 4 leveling legs, construct the AnF and place it in your desired location.




PACKAGING & SHIPPING

Each AnF cabinet ships on its own specially designed skid. Round units can also be stacked three high for storage.




ROUND AnF



| MODEL | A OVERALL DIAMETER | B OVERALL HEIGHT | C MAX CUT OUT |
|---------|--------------------|------------------|---------------|
| ANF-R42 | 42 1/4" | 18 5/8" | 21" |
| ANF-R48 | 48 1/4" | 18 5/8" | 28 7/8" |
| ANF-R60 | 60 1/4" | 18 5/8" | 33 3/8" |

| | | 16" Round | 19" Round | 20" Square | 25" Round | 26" Square | 29" Round | 32" Square | 33" Round |
|---------|---------------------------------|-----------|-----------|------------|-----------|------------|-----------|------------|-----------|
| ANF-R42 | Does this AnF support this pan? | ✓ | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ | ✗ |
| | Will this pan require supports? | ✓ | ✗ | ✗ | ✗ | ✗ | ✗ | ✗ | ✗ |
| ANF-R48 | Does this AnF support this pan? | ✗ | ✓ | ✓ | ✓ | ✓ | ✗ | ✗ | ✗ |
| | Will this pan require supports? | ✗ | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ | ✗ |
| ANF-R60 | Does this AnF support this pan? | ✗ | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Will this pan require supports? | ✗ | ✗ | ✗ | ✓ | ✗ | ✗ | ✗ | ✗ |


LINEAR AnF



| MODEL | A LENGTH | B HEIGHT | C DEPTH | MAX CUT OUT WIDTH | MAX CUT OUT LENGTH |
|---------|----------|----------|---------|-------------------|--------------------|
| ANF-L48 | 48" | 18 1/2" | 24" | 15 3/4" | 44 1/2" |
| ANF-L66 | 66" | 18 1/2" | 24" | 15 3/4" | 62 1/2" |
| ANF-L74 | 74" | 18 1/2" | 24" | 15 3/4" | 70 1/2" |
| ANF-L96 | 96" | 18 1/2" | 24" | 15 3/4" | 89" |

| | ANF-L48 supports the following | ANF-L66 supports the following | ANF-L74 supports the following | ANF-L96 supports the following |
|-----------------|-----------------------------------|-----------------------------------|--|-----------------------------------|
| L-SERIES | ALL MODELS | ALL MODELS | ALL MODELS | ALL MODELS |
| L-SERIES COMBOS | NONE | 24+24 24+ 30 | 24+ 24 24+ 30 24+ 36 30+ 30 30+ 36 | ALL MODELS |
| LOF - T | LOF-30LT LOF-36LT | ALL MODELS | ALL MODELS | ALL MODELS |
| LOF - H | LOF-30LH LOF-36LH | ALL MODELS | ALL MODELS | ALL MODELS |
| LOF - MT | ALL MODELS | ALL MODELS | ALL MODELS | ALL MODELS |

SQUARE AnF



| MODEL | A LENGTH | B HEIGHT | MAX CUT OUT WIDTH | MAX CUT OUT LENGTH |
|---------|----------|----------|-------------------|--------------------|
| ANF-S48 | 48" | 18 1/2" | 40 3/16" | 44 1/2" |
| ANF-S60 | 66" | 18 1/2" | 52 3/16" | 56 1/2" |

ALL SQUARE AnF MODELS WILL SUPPORT ALL FIREGEAR SQUARE PAN BURNER SYSTEMS

ROUND AnF PACKAGES (TFS)



| MODEL | AnF MODEL | BURNER MODEL |
|-----------------|-----------|-------------------------|
| ANFR42-19RTFS-N | ANF-R42 | FPB-19RBSTFS-N (pg. 18) |
| ANFR42-19RTFS-P | ANF-R42 | FPB-19RBSTFS-P (pg. 18) |
| ANFR48-19RTFS-N | ANF-R48 | FPB-19RBSTFS-N (pg. 18) |
| ANFR48-19RTFS-P | ANF-R48 | FPB-19RBSTFS-P (pg. 18) |

ROUND AnF PACKAGES (TMSI)



| MODEL | AnF MODEL | BURNER MODEL |
|------------------|-----------|--------------------------|
| ANFR42-19RTMSI-N | ANF-R42 | FPB-19RBSTMSI-N (pg. 18) |
| ANFR48-19RTMSI-N | ANF-R48 | FPB-19RBSTMSI-N (pg. 18) |

ROUND AnF PACKAGES (MT)



| MODEL | AnF MODEL | BURNER MODEL |
|----------------|-----------|------------------------|
| ANFR42-19RMT-N | ANF-R42 | FPB-19RBSMT-N (pg. 19) |
| ANFR48-19RMT-N | ANF-R48 | FPB-19RBSMT-N (pg. 19) |

LINEAR AnF PACKAGES (TFS)



| MODEL | AnF MODEL | BURNER MODEL |
|-----------------|-----------|-----------------------|
| ANFL48-30LTFS-N | ANF-L48 | FPB-30LTFS-N (pg. 35) |
| ANFL48-30LTFS-P | ANF-L48 | FPB-30LTFS-P (pg. 35) |

LINEAR AnF PACKAGES (TMSI)



| MODEL | AnF MODEL | BURNER MODEL |
|-------------------|-----------|-------------------------|
| ANFL48-30LHMSI-N* | ANF-L48 | LOF-30LHTMSI-N (pg. 36) |
| ANFL48-30LTMSI-N | ANF-L48 | LOF-30LTTMSI-N (pg. 37) |

*NOT PICTURED. SEE PAGE 36 TO SEE THE H BURNER SYSTEM.

LINEAR AnF PACKAGES (MT)



| MODEL | AnF MODEL | FPB MODEL |
|-------------------|-----------|----------------------|
| ANFL48-30LMT-N | ANF-L48 | FPB-30LMT-N (pg. 35) |
| ANFL48-LOF30MT-N* | ANF-L48 | LOF-30MT-N (pg. 35) |

*NOT PICTURED. SEE PAGE 37 TO SEE THE LINE OF FIRE BURNER SYSTEM.

ARCHITECTURAL BLOCK & PAVER ACCESSORIES



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)






FLEXFRAME



FEATURES

- Allows you to fill the gap between the inside opening and the size of the burner pan with lip or flat pan
- Allows you to remove the burner system without moving any pavers or architectural block

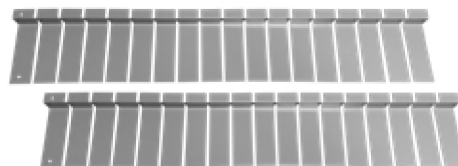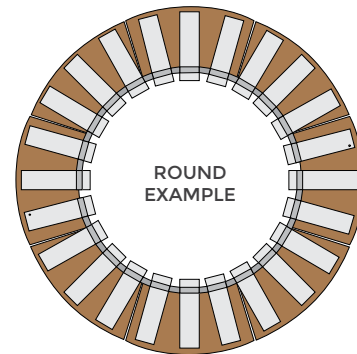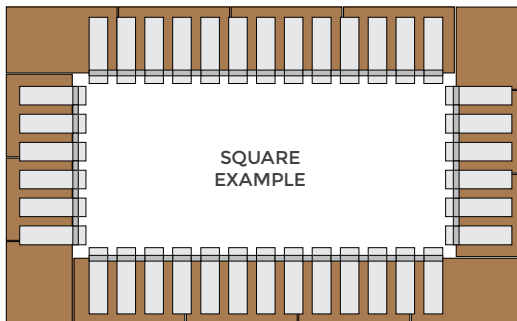

FLEXFRAME-SS

Constructed of 16 Gauge 304 Stainless Steel. Provides additional protection against outdoor elements including salt water environments - two (2) 44" pieces per package.

CONTROL PANELS



PAVER-CP-MT

For use when building fire pit enclosures with pavers and Match Throw "MT" Burner Systems.

Includes: Face Plate for Key Valve with Rubber Plug for MSI hole, Paver Kit Bracket and Extender, Lintel - 12" L x 3" W (20 gauge galvanized steel), Screws, Fittings, Tapcon® concrete anchors.

Key Valve Kit included as part of the Burner System.



PAVER-CP-MT-MSI

For use when building fire pit enclosures with pavers and Match Throw "MT" Burner Systems.

Includes: Face plate for Key Valve and MSI, Paver Kit Bracket and Extender, Lintel - 12" L x 3" W (20 gauge galvanized steel), Screws, Battery Operated Piezo Igniter Assembly, 48" Ignition Wire and a AAA battery, Ignition Hood, Screen Fittings, Tapcon® concrete anchors.

Key Valve Kit included as part of Burner System.



PAVER-CP-TMSI

For use when building fire pit enclosures with pavers and Thermocouple Manual Safety "TMSI" Burner Systems.


Includes: Paver Kit Bracket and Extender, Lintel - 12" L x 3" W (20 gauge galvanized steel), Screws, Fittings, Tapcon® concrete anchors.

TMSI Valve Kit and Face Plate included as part of the Burner System.

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

VENT KITS

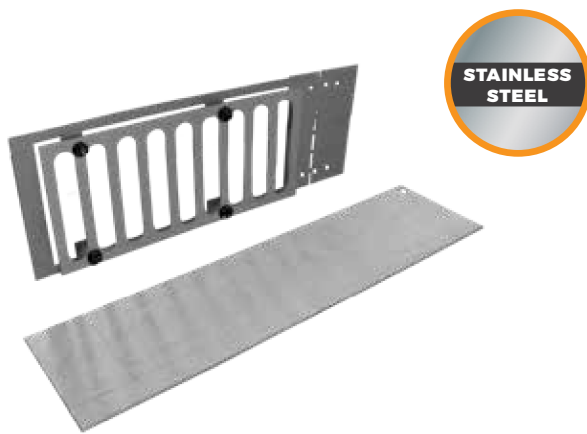

PAVER-VENT-4-LNTS

Stainless Steel Paver Vent Kit with Lintel: includes two (2) 3 ⁵/₈" H x 8" W vents with mounting plate, extension plate extends overall size up to 10" W and two (2) Tapcon® concrete anchors and Lintel - 12" L x 3" W (20 gauge galvanized steel). Each vent provides 18 square inches of ventilation.



PAVER-VENT-6-LNTS

Stainless Steel Paver Vent Kit with Lintel: includes two (2) 5 ⁵/₈" H x 8" W vents with mounting plate, extension plate extends overall size up to 10" W and two (2) Tapcon® concrete anchors and Lintel - 12" L x 3" W (20 gauge galvanized steel). Each vent provides 18 square inches of ventilation.

ARCHITECTURAL BLOCK & PAVER ACCESSORIES

PAVER KITS

ROUND FLAT PAVER KITS

Fits 29" to 34" openings



⚠️ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠️ WARNING! | CALIFORNIA PROPOSITION 65


This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

| MODEL | IGNITION | KIT INCLUDES |
|-----------------|----------|---|
| FPB-29DMTN-PK | MT | FPB-29DBSMT-N FLEXFRAME-SS PAVER-VENT-4LNTS PAVER-CP-MT FG-LAVA-10 (3) |
| FPB-29DTMSIN-PK | TMSI | FPB-29DBTMSI-N FLEXFRAME-SS PAVER-VENT-4LNTS PAVER-CP-TMSI FG-LAVA-10 (3) |
| FPB-29DTFSN-PK* | TFS | FPB-29DBSTFS-N FLEXFRAME-SS PAVER-VENT-4LNTS FG-LAVA-10 (3) |

*TFS BURNER SYSTEMS REQUIRE 18 INCHES OF CLEARANCE FROM THE BOTTOM OF THE PAN TO THE GROUND

SQUARE FLAT PAVER KITS

Fits 30" to 35" openings

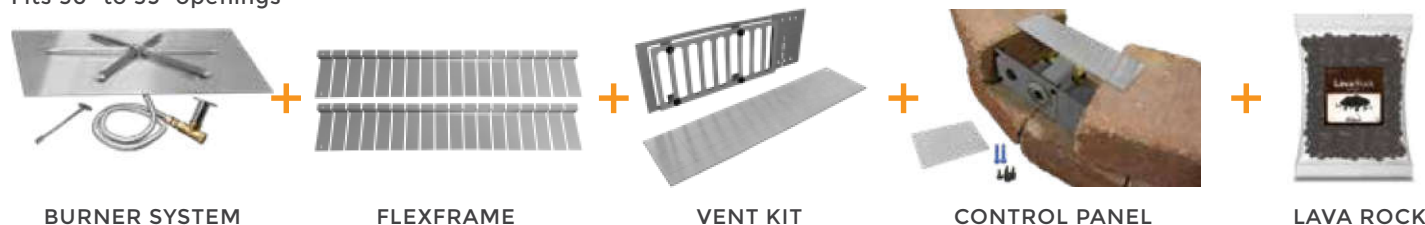

| MODEL | IGNITION | KIT INCLUDES |
|------------------|----------|---|
| FPB-30SFMTN-PK | MT | FPB-30SFBSTMT-N FLEXFRAME-SS PAVER-VENT-4LNTS PAVER-CP-MT FG-LAVA-10 (3) |
| FPB-30SFMSIN-PK | TMSI | FPB-30SFBSTMSI-N FLEXFRAME-SS PAVER-VENT-4LNTS PAVER-CP-TMSI FG-LAVA-10 (3) |
| FPB-30SFTFSN-PK* | TFS | FPB-30SFBSTFS-N FLEXFRAME-SS PAVER-VENT-4LNTS FG-LAVA-10 (3) |

**TFS BURNER SYSTEMS REQUIRE 18 INCHES OF CLEARANCE FROM THE BOTTOM OF THE PAN TO THE GROUND

LINEAR PAVER KITS

Fits 36" to 41" L x 6" to 11" W openings



| MODEL | IGNITION | KIT INCLUDES |
|------------------|----------|--|
| FPB-30LMTN-PK | MT | FPB-30LMT-N FLEXFRAME-SS PAVER-VENT-4LNTS PAVER-CP-MT FG-LAVA-10 (2) |
| LOF-36LTMSIN-PK* | TMSI | LOF-36LTTMSI-N* FLEXFRAME-SS PAVER-VENT-4LNTS PAVER-CP-TMSI FG-LAVA-10 (2) |
| LOF-36LHMSIN-PK* | TMSI | LOF-36LHTMSI-N* FLEXFRAME-SS PAVER-VENT-4LNTS PAVER-CP-TMSI FG-LAVA-10 (2) |
| FPB-36LTFSN-PK** | TFS | FPB-36LTFS-N FLEXFRAME-SS PAVER-VENT-4LNTS FG-LAVA-10 (2) |


*BURNER SYSTEM NOT PICTURED, REFER TO PAGE 36 AND 37 FOR MORE INFORMATION

**TFS BURNER SYSTEMS REQUIRE 18 INCHES OF CLEARANCE FROM THE BOTTOM OF THE PAN TO THE GROUND

FIRE FURNISHINGS



PICTURED: SANCTUARY 1

 **WARNING: CALIFORNIA PROPOSITION 65**
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)



⚠ WARNING: CALIFORNIA PROPOSITION 65
This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FIRE FURNISHINGS

CONCRETE FIRE FURNISHINGS

The Sanctuary collection is the perfect centerpiece in your private outdoor oasis. Our Sanctuary fire furnishings include Firegear Burner Systems enclosed into beautiful high-strength, glass fiber reinforced concrete enclosure in a variety of shapes and sizes.



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FIRE FURNISHINGS

CONCRETE FIRE FURNISHINGS

SANCTUARY 1



FEATURES

- Firegear TMSI (Thermocouple Manual Safety with Spark Ignition) burner system
- All Sanctuary furnishings ship as Natural Gas (NG) with optional Liquid Propane (LP) conversion kits available

| MODEL | LENGTH | WIDTH | HEIGHT | WEIGHT | BURNER | COLOR |
|------------------|--------|-------|--------|---------|----------------|-------|
| SAN1-30LHSTMSI-N | 56" | 38" | 16" | 425 lbs | LOF-30LHTMSI-N | SLATE |

SANCTUARY 2



FEATURES

- Choice of Firegear TMSI (Thermocouple Manual Safety with Spark Ignition) or MT (Match Throw) burner systems
- All Sanctuary furnishings ship as Natural Gas (NG) with optional Liquid Propane (LP) conversion kits available

| MODEL | DIAMETER | HEIGHT | WEIGHT | BURNER | COLOR |
|----------------|----------|--------|---------|-----------------|-------|
| SAN2-20DTMSI-N | 39" | 18" | 350 lbs | FPB-20DBSTMSI-N | SLATE |
| SAN2-20DMT-N | 39" | 18" | 350 lbs | FPB-20DBSMT-N | SLATE |

SANCTUARY 3



FEATURES

- Choice of Firegear TMSI (Thermocouple Manual Safety with Spark Ignition) or MT (Match Throw) burner systems
- All Sanctuary furnishings ship as Natural Gas (NG) with optional Liquid Propane (LP) conversion kits available

| MODEL | DIAMETER | HEIGHT | WEIGHT | BURNER | COLOR |
|----------------|----------|--------|--------|-----------------|-------|
| SAN3-20DTMSI-N | 29" | 14" | 90 lbs | FPB-20DBSTMSI-N | SLATE |
| SAN3-20DMT-N | 29" | 14" | 90 lbs | FPB-20DBSMT-N | SLATE |

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ACCESSORIES



SANCTUARY-LPTE

Liquid Propane (LP) tank enclosure or use as an end table - features easily removable lid for tank change. 21 1/2" tall, 20" Wide, Weight: 80 lb. Color - SLATE



FG-LPQDK

Liquid Propane Quick Disconnect Kit - includes: 12' (144") 1/2" OD (3/8") ID Gray PVC Galvanized Steel Hose with Quick Disconnect Fitting and Socket Dust Cap, FG-LPRK Liquid Propane Regulator, 3/8" MPT Adapter and ACME QUICK CONNECT. CSA-AGA/CGA Approved, rated at 100,000 Btu

FIRE FURNISHINGS

KEY WEST COFFEE TABLE



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

FIRE FURNISHINGS KEY WEST COFFEE TABLE

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

KEY WEST COFFEE TABLE



FEATURES

- The base of the Coffee Fire Table is finished with a Sunset Bronze ultraviolet powder coating
- Table measures 19 1/4" Tall (floor to top) - Top measures 48" Length x 24" Width
- Choice of Stainless Steel or Sunset Bronze top
- 49,000 Btu, operates on an 11lb. propane tank hidden inside the table (tank sold separately)
- Battery operated electronic ignition system with safety valve that turns off the gas supply in case of flame loss
- Dining leaf insert included, matches top color, creates a flat surface when optional glass windshield is removed
- Ships as propane, natural gas conversion kit available (376-968)
- Tested and listed by Intertek for installation in USA and Canada

MODELS

KWCH-P-SS Key West Coffee Table with Stainless Steel Top, KWCH-L1, 377-927 Table Top, 49,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately)

KWCH-P-BR Key West Coffee Table with Sunset Bronze Top, KWCH-L1, 377-927 Table Top, 49,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately)

TABLE TOPS





Sunset Bronze - KWCH-P-BR



Stainless Steel - KWCH-P-SS

DIMENSIONS

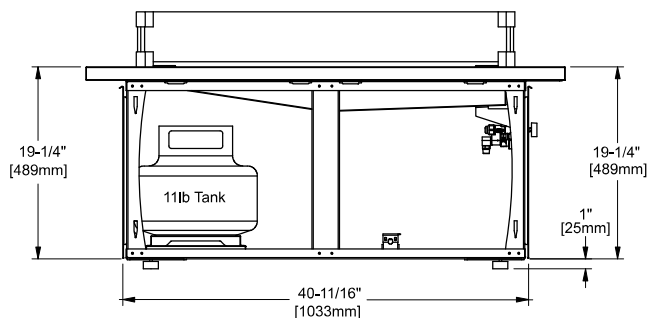


ACCESSORIES

376-968 Natural Gas conversion kit for Key West Coffee Table (KWCH-P-SS & KWCH-P-BR), 50,000 BTU


326-930 Driftwood six (6) piece twig set (pg. 68)

GWS-3810 Tempered Glass Windshield (38" L x 12 7/8" W x 7 1/2" H) (pg. 74)

JEWELRY

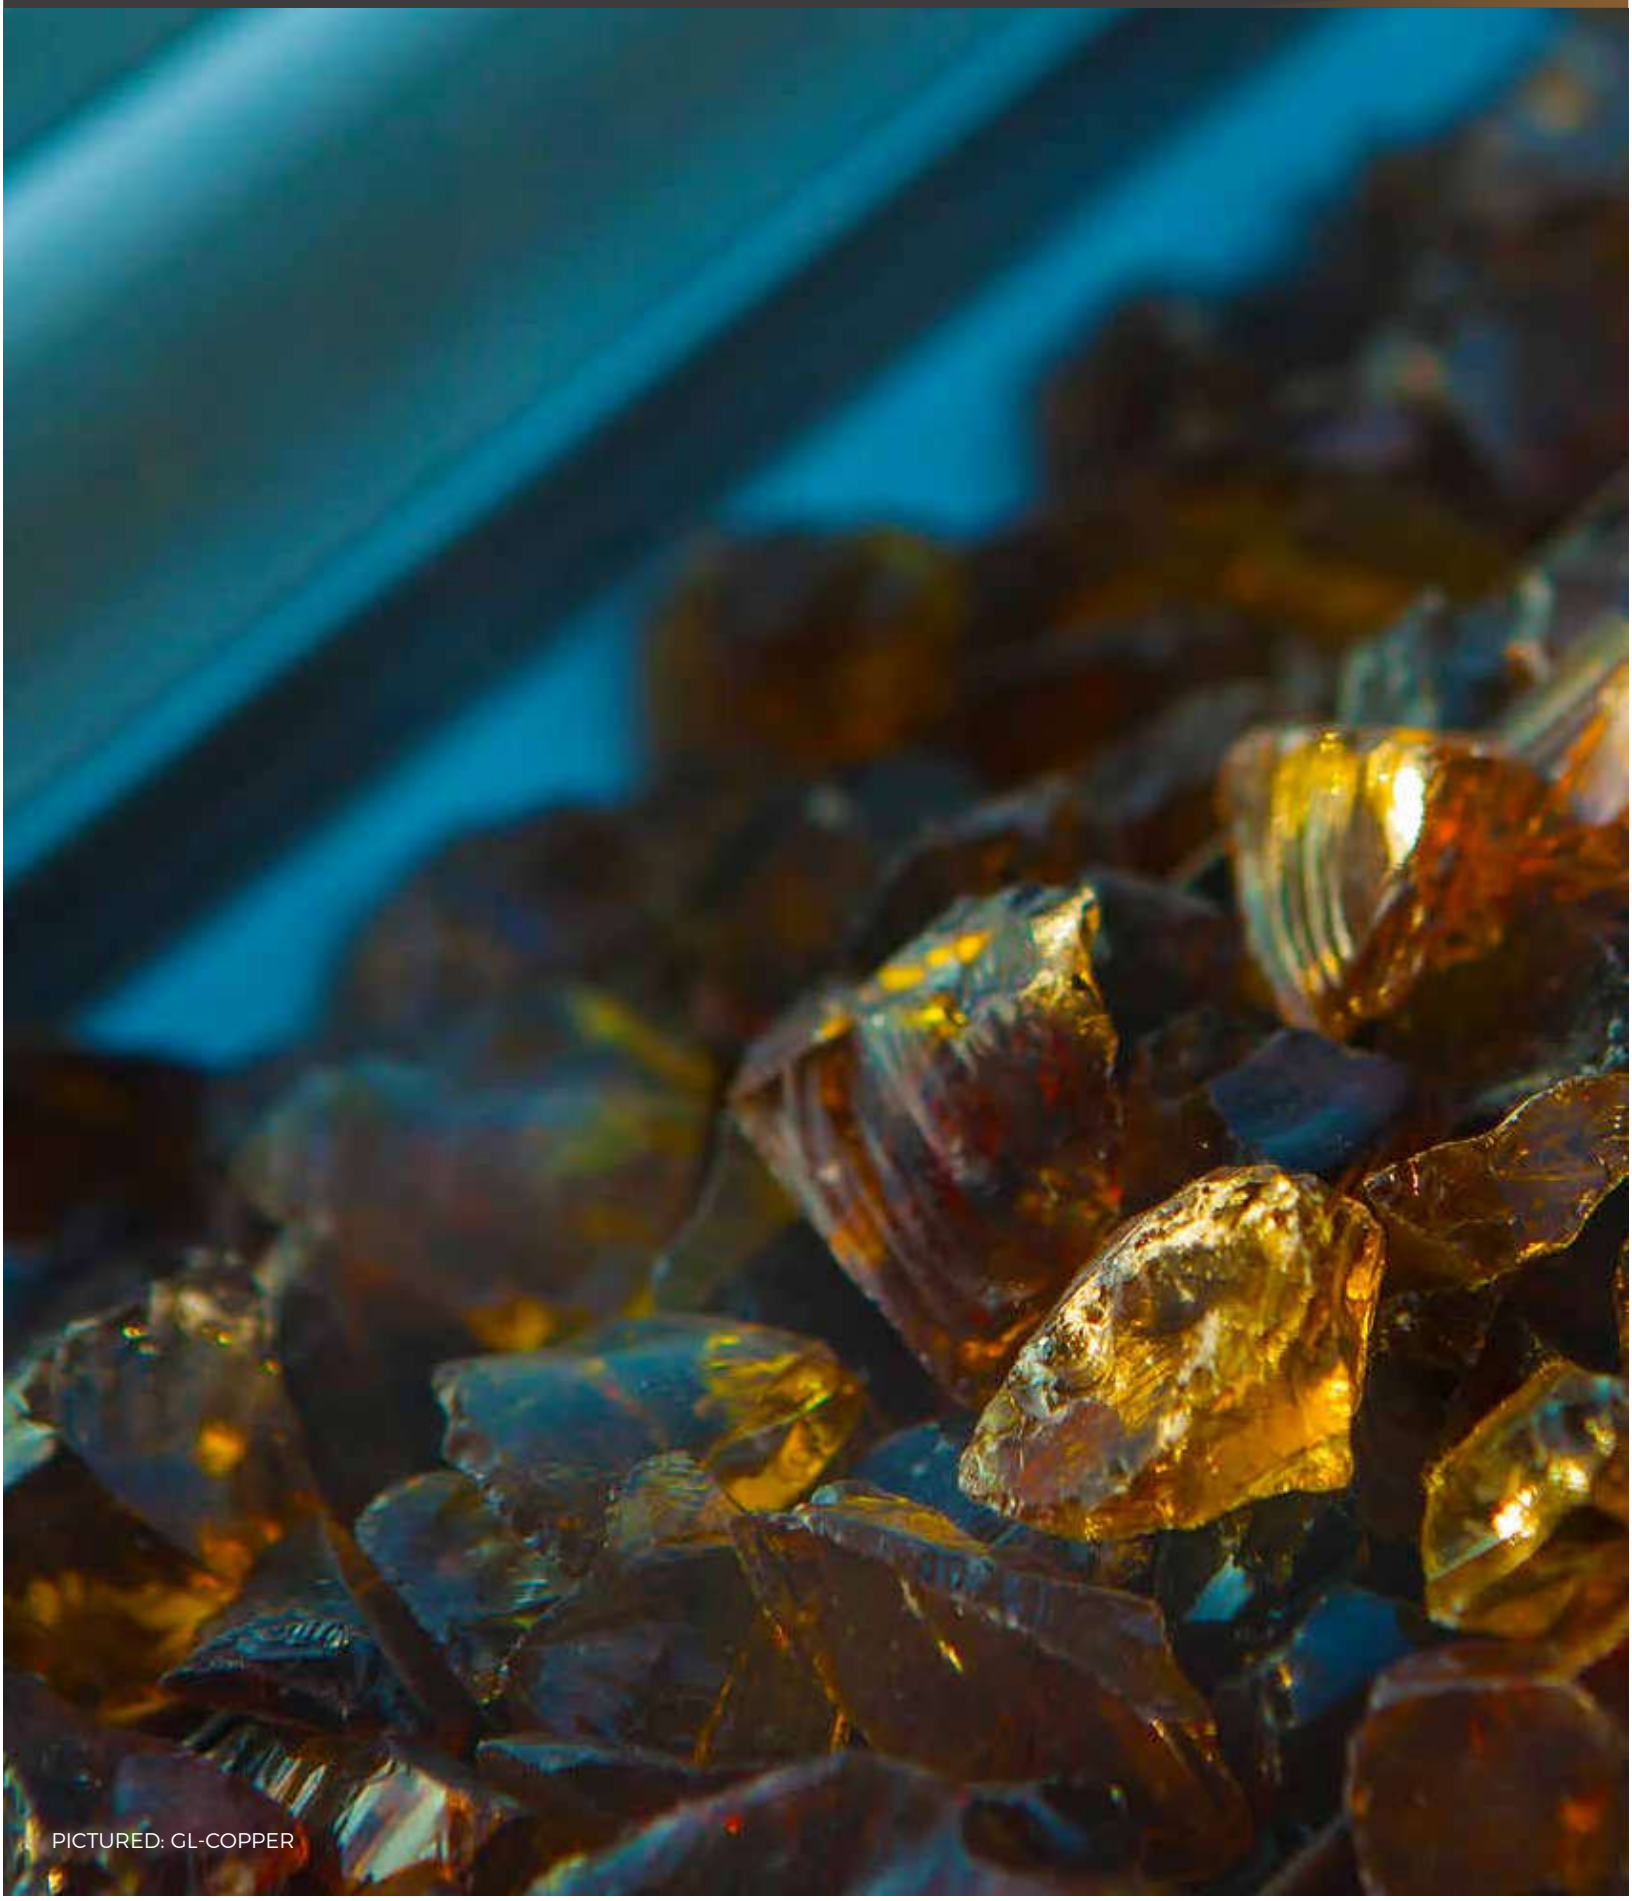

PICTURED: GL-COPPER

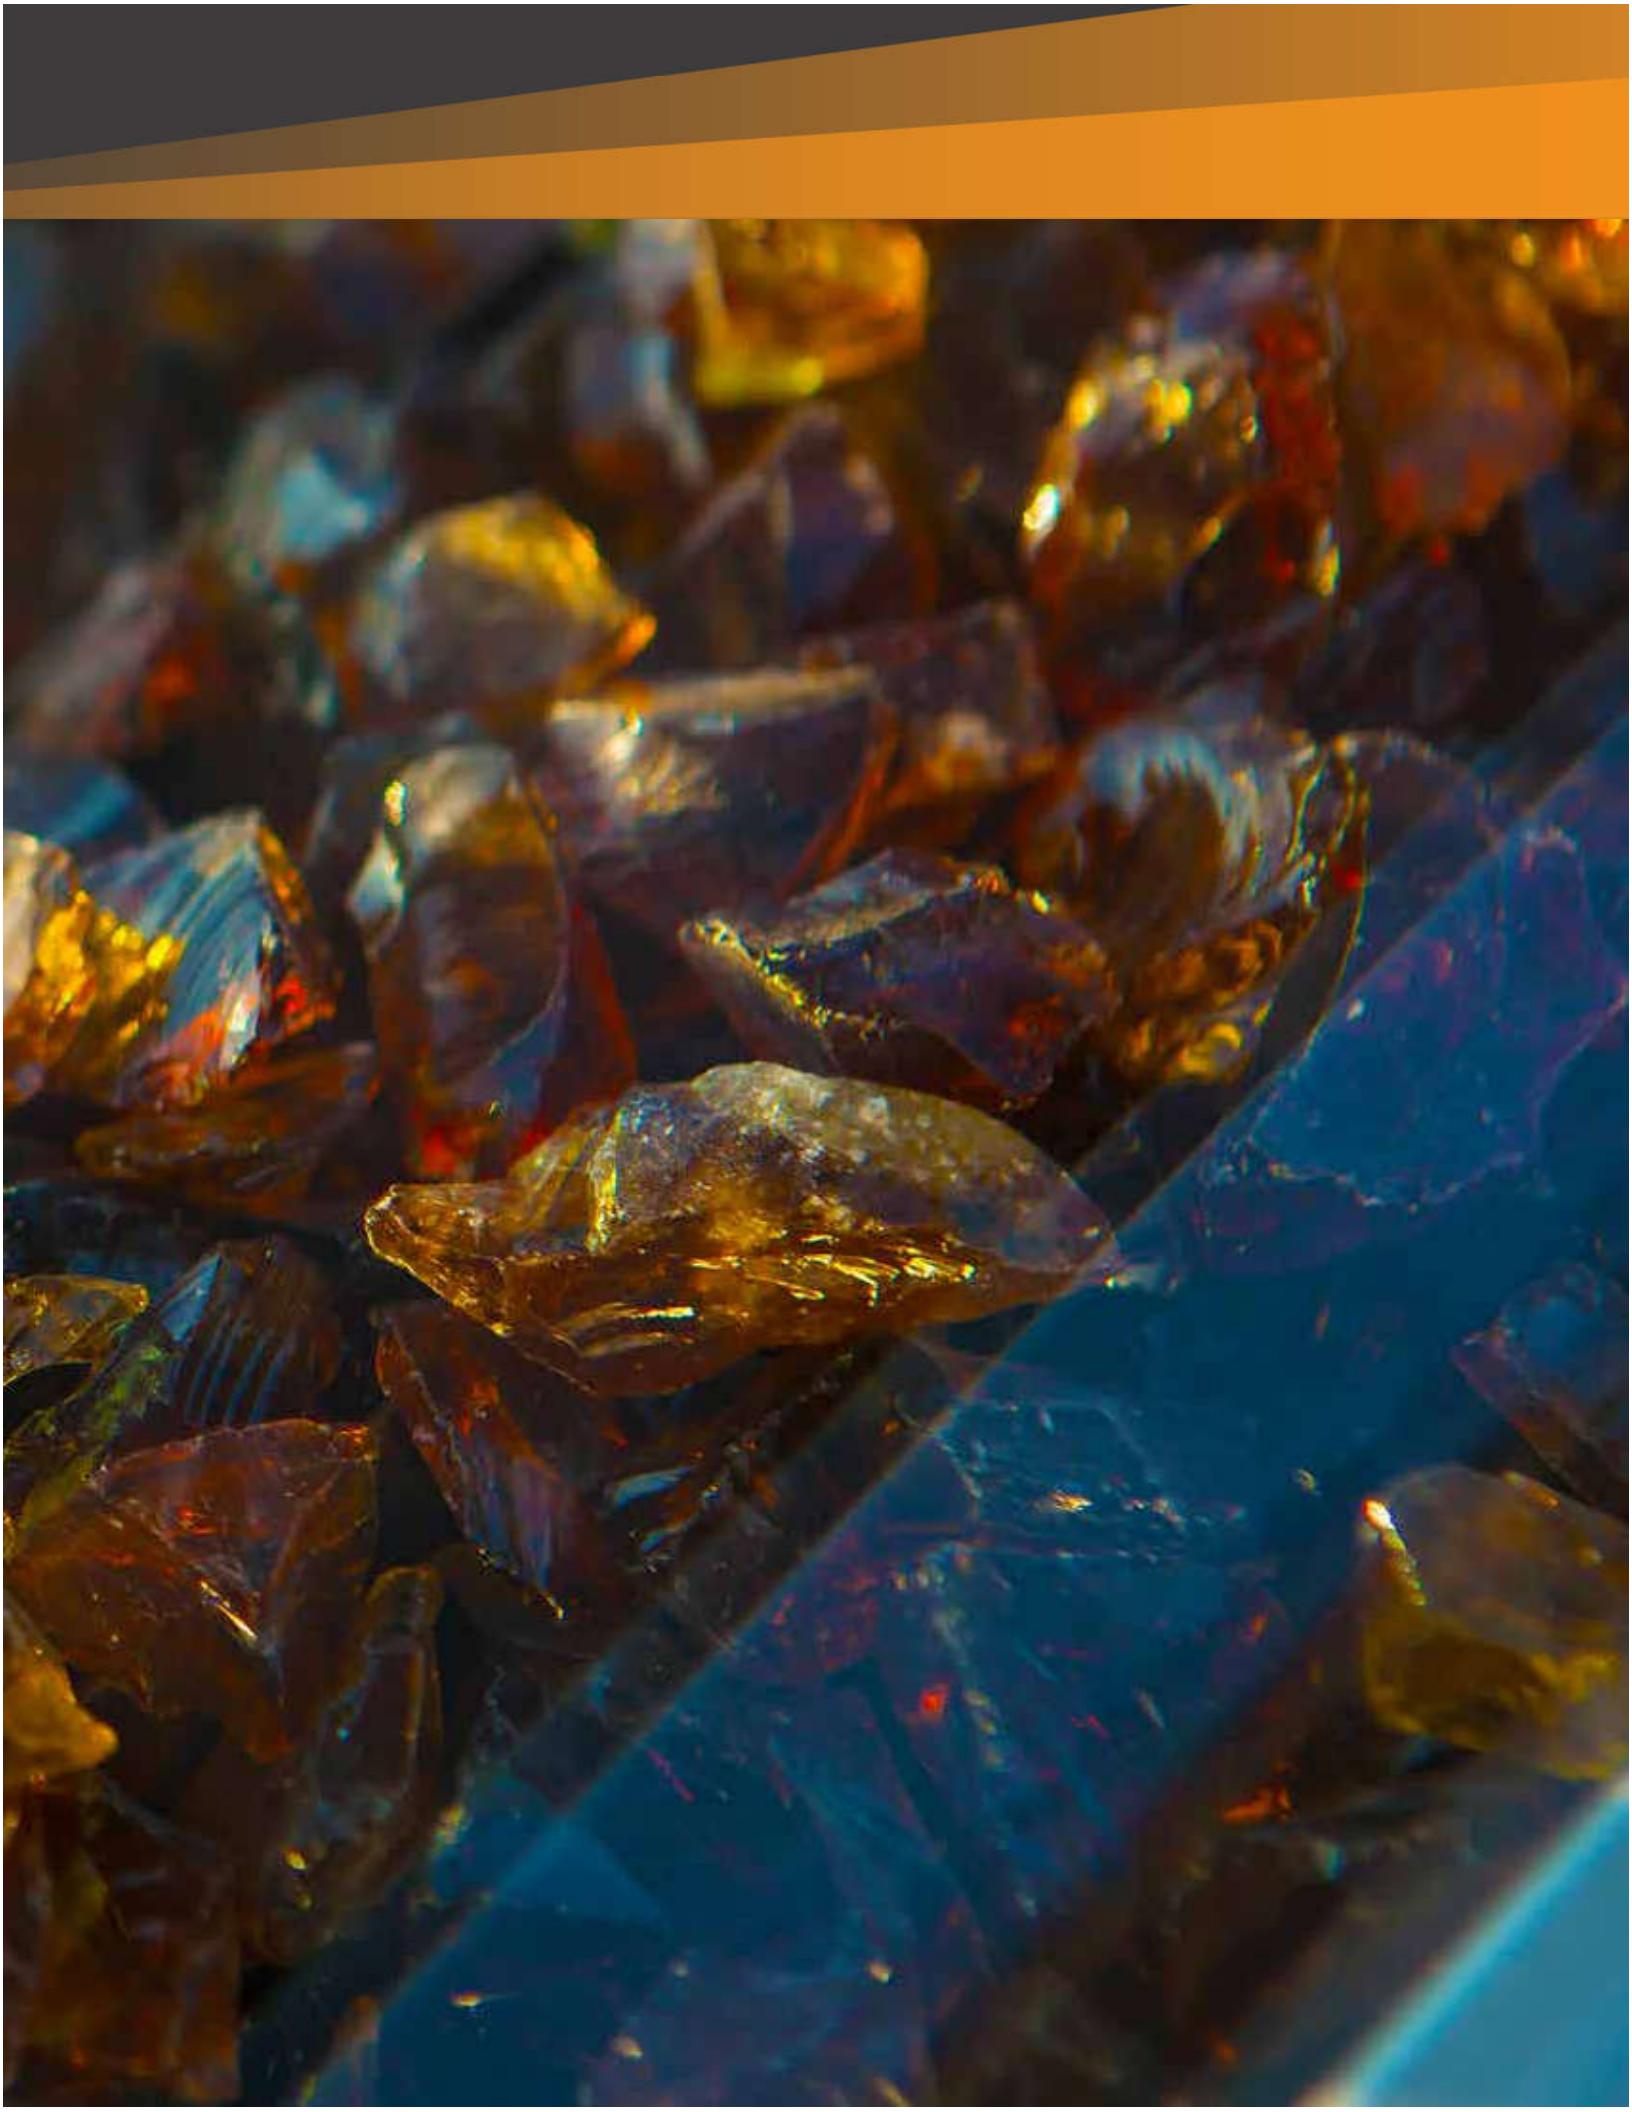

HOW MUCH MEDIA SHOULD I USE?

ROUND FIRE PITS

| INSIDE DIAMETER OF FIRE PIT | LAVA ROCK ONLY | LAVA ROCK AS A BASE | GLASS ON TOP OF LAVA ROCK | LAVA STONES ON TOP OF LAVA ROCK | LAVA BOULDERS ON TOP OF LAVA ROCK |
|--------------------------------|-------------------|------------------------|------------------------------|------------------------------------|--------------------------------------|
| 16" | 10 lbs | 5 lbs | 10 lbs | 10 lbs | 1/4 box |
| 19" | 15 lbs | 10 lbs | 20 lbs | 15 lbs | 1/2 box |
| 25" | 20 lbs | 15 lbs | 30 lbs | 20 lbs | 3/4 box |
| 29" | 25 lbs | 20 lbs | 40 lbs | 25 lbs | 1 box |
| 33" | 30 lbs | 25 lbs | 50 lbs | 30 lbs | 1 box |
| 34" | 35 lbs | 25 lbs | 50 lbs | 30 lbs | 1 box |
| 44" | 50 lbs | 35 lbs | 70 lbs | 50 lbs | 2 - 3 boxes |

SQUARE FIRE PITS


| INSIDE DIAMETER OF FIRE PIT | LAVA ROCK ONLY | LAVA ROCK AS A BASE | GLASS ON TOP OF LAVA ROCK | LAVA STONES ON TOP OF LAVA ROCK | LAVA BOULDERS ON TOP OF LAVA ROCK |
|--------------------------------|-------------------|------------------------|------------------------------|------------------------------------|--------------------------------------|
| 20" | 15 lbs | 10 lbs | 20 lbs | 15 lbs | 1/2 box |
| 26" | 20 lbs | 15 lbs | 30 lbs | 20 lbs | 3/4 box |
| 32" | 30 lbs | 25 lbs | 50 lbs | 30 lbs | 1 box |
| 38" | 35 lbs | 30 lbs | 60 lbs | 35 lbs | 1 1/4 box |

LINEAR FIRE PITS

| | LAVA ROCK ONLY | GLASS ONLY | LAVA STONES ONLY | | LAVA ROCK ONLY | GLASS ONLY | LAVA STONES ONLY |
|--------------------|-------------------|---------------|---------------------|----------------|-------------------|---------------|---------------------|
| FPB-24L | 10 lbs | 10 lbs | 6 lbs | LOF-30LHTMSI-N | 20 lbs | 25 lbs | 20 lbs |
| FPB-30L LOF-30MT | 10 lbs | 13 lbs | 10 lbs | LOF-36LHTMSI-N | 25 lbs | 35 lbs | 25 lbs |
| FPB-36L LOF-36MT | 15 lbs | 15 lbs | 12 lbs | LOF-48LHTMSI-N | 35 lbs | 55 lbs | 35 lbs |
| FPB-24L + FPB-24L | 16 lbs | 20 lbs | 16 lbs | | | | |
| FPB-24L + FPB-30L | 18 lbs | 23 lbs | 18 lbs | LOF-30LTTMSI-N | 10 lbs | 20 lbs | 10 lbs |
| FPB-30L + FPB-30L | 20 lbs | 26 lbs | 20 lbs | LOF-36LTTMSI-N | 15 lbs | 25 lbs | 15 lbs |
| FPB-30L + FPB-36L | 22 lbs | 28 lbs | 22 lbs | LOF-48LTTMSI-N | 20 lbs | 30 lbs | 20 lbs |
| FPB-36L + FPB-36L | 24 lbs | 30 lbs | 24 lbs | LOF-60LTTMSI-N | 25 lbs | 40 lbs | 25 lbs |


LAVA ROCK ONLY

When using lava rock, use enough to cover entire burner. Do not over-fill. Just use enough to hide the burner from view.




LAVA ROCK & LAVA STONES

In order to use lava stones, you must lay down a layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your lava stones and lay it on top of the lava rock and burner. The lava stones should only be one layer thick, just enough to cover the burner.



LAVA ROCK & GLASS

In order to use glass, you must lay down a layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your glass and lay it on top of the lava rock and burner. The glass should only be 3/4" to 1" thick, or just enough to cover the burner.



LAVA ROCK & LAVA BOULDERS

In order to use lava boulders, you must lay down a bottom layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your lava boulders and lay it on top of the lava rock and burner. Lava boulders are 6" to 12" in diameter.



Media amounts are estimates. When using Flat pans, media amounts may need to be adjusted

MEDIA



LAVA ROCK

Mined from the earth, these dark rocks contrast beautifully against a bright flame. Each rock is approximately 1" to 2" in diameter.



50 lb. Bag
Sold in approximately
one (1) cubic foot bags



10 lb. Bag



LAVA STONE

Made from tumbled lava rock, these stones lend a casual elegance. Each stone is approximately 1" to 2" in diameter.



50 lb. Bag



LAVA BOULDERS

These rugged rocks are 6" to 12" in diameter, for a coastal, straight-off-the-beach style.



30 lb. Box

REFLECTIVE LARGE

Mirror finish broken reflective
Approximately 1/2" to 3/4" in size



EBONY
GRL-BLACK



BRONZE
GRL-BRONZE



COBALT
GRL-COBALT



COPPER
GRL-COPPER



TAHITI
GRL-TAHITI



All glass is sold in 5 lb.
bags. There are eight (8)
bags per case.

BEAD

Glass beads | Approximately 16 - 18mm in size



COBALT
GB-COBALT



H2O
GB-CLEAR



MIDNIGHT
GB-BLACK



SKY
GB-LT BLUE



TEQUILA
GB-GOLD



WHITE
GB-WHITE

BROKEN

Large broken | Approximately 1/2" to 3/4" in size



PEPPER
GL-BLACK



BLUEBERRY
GL-DARK BLUE



SEABREEZE
GL-SEABREEZE



CRYSTAL
GL-CRYSTAL



CARIBBEAN
GL-LT BLUE



COLA
GL-COPPER



COSMO
GL-RED



Case pricing available
(8) Eight 5lb bags

REFLECTIVE SMALL

Mirror finish broken reflective
Approximately 1/4" to 3/8" in size



GOLD FINGER
GR-GOLD



PLATINUM
GR-PLAT

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Titanium Dioxide and Lithium Carbonate, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

JEWELRY
LOG SETS

LOG SETS

For your fire pit



*LAVA ROCK NOT INCLUDED

SPIT FIRE MODEL# L-SF



This seventeen (17) piece refractory log set is a great alternative to enjoy your fire feature without the mess of real wood and ashes.

- Compatible with pits larger than 19"
- Refractory concrete material
- Ships as one (1) box, weighs approx 52 lbs.
- Five (5) Year Limited Warranty



*LAVA ROCK NOT INCLUDED

BEACH FIRE MODEL# L-BF



The modest version of the Spit Fire, this eight (8) piece set is designed for smaller fire pit burners or used as an accent piece on larger burners.

- Compatible with pits smaller than 20"
- Refractory concrete material
- Ships as one (1) box, weighs approx 20 lbs.
- Five (5) Year Limited Warranty



*LAVA ROCK NOT INCLUDED

SEDONA MODEL# L-SEDONA



The Sedona is the Grand Daddy of all the Firegear log sets. This nineteen (19) piece majestic fire pit log set can stack as high as 32".

- Compatible with pits larger than 25"
- Refractory concrete material
- Ships as one (3) boxes, weighs approx 200 lbs., ships LTL
- Five (5) Year Limited Warranty



*LAVA ROCK NOT INCLUDED

DRIFTWOOD TWIGS MODEL# 326-930



Beach washed and twisted driftwood twigs inspired this design. The coloration in this six (6) piece log set is truly unique.

- Compatible with any size fire pit
- Ceramic fiber composition
- Ships as one (1) box, weighs approx 22 lbs.
- One (1) Year Limited Warranty



ACCESSORIES



PICTURED: LOF-36MT-N



⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

E-STOP GAS TIMER

PATENT PENDING



FEATURES


- Unique all mechanical gas shut-off timer with built-in emergency stop - no power required
- High Btu capacity
- Safest gas timer available in the industry
- Available in 2.5 and 1 hour models
- Innovative multi-port design provides installation flexibility
- 1/2" NPT inlets and outlets (side and back)
- Six (6) mounting holes (front and side) for secure installation
- Natural gas (NG) or Liquid Propane (LP) - no conversion necessary

COMPLETELY MECHANICAL
NO POWER REQUIRED



ESTOP2-5H

Mechanical timer with manual emergency shut-off. 2.5 hour countdown timer.

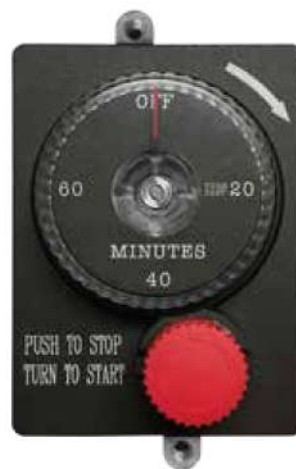

ESTOP1-0H

Mechanical timer with manual emergency shut-off. 1 hour countdown timer.

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ACCESSORIES

CONTROLS

⚠ WARNING! | CALIFORNIA PROPOSITION 65
This product can expose you to Tetrabromobisphenol-A, which is known to the state of California to cause cancer. (For more information, go to www.p65warnings.ca.gov)



TM-R-AFITX

Wireless Wall Timer (30min/60min/120min), twenty (20) foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) - (TFS units only)



1322WT

Wireless Wall Mount On/Off/High/Low Transmitter, twenty (20) foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) - (TFS units only)



1001D-AFITX

Wireless wall mount switch (On/Off), twenty (20) foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) - (TFS units only)



WS

Wired wall mount switch (On/Off) with 20' of low voltage wire





1001-A

Wireless hand held remote (On/Off), battery operated, receiver with learn function, and a snap on wall plate for the receiver (TFS units only)



AF-4000ADP24-80

110 volts AC adapter, converts to 7.5 DC volts for TFS systems. Requires a weatherproof enclosure.

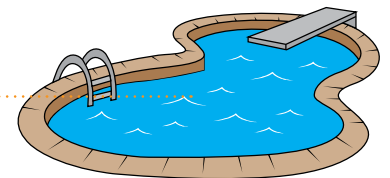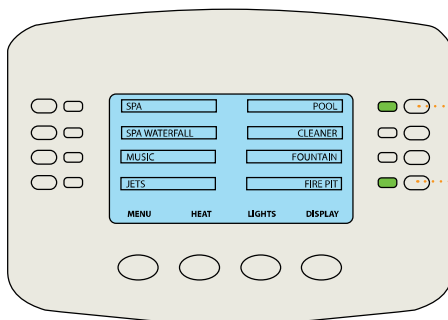

AF-4000HAT

Home/Pool Automation System Link (works with most manufacturers systems)

ROUND WINDSHIELDS



FEATURES

Heavy duty 1/4" heat resistant tempered glass with pencil grind satin edges
Zinc die casted, plated polished chrome hardware with silicone rubber feet

| MODEL | SIZE | DESIGNED TO FIT |
|---------|----------------|-------------------|
| GWS-22R | 22.9" Diameter | FPB-16R FPB-19R |

SQUARE WINDSHIELDS



FEATURES

Heavy duty 1/4" heat resistant tempered glass with pencil grind satin edges
Zinc die casted, plated polished chrome hardware with silicone rubber feet

| MODEL | SIZE | DESIGNED TO FIT | GLASS PIECES |
|----------|--------------------------|-----------------------|--------------|
| GWS-2424 | 24" L x 24" L x 7 1/2" H | FPB-20S Square Burner | 4 |
| GWS-3030 | 30" L x 30" L x 7 1/2" H | FPB-26S Square Burner | 4 |
| GWS-3838 | 38" L x 38" L x 7 1/2" H | FPB-32S Square Burner | 4 |
| GWS-4242 | 42" L x 42" L x 7 1/2" H | FPB-38S Square Burner | 4 |

LINEAR WINDSHIELDS



FEATURES

Heavy duty 1/4" heat resistant tempered glass with pencil grind satin edges
Zinc die casted, plated polished chrome hardware with silicone rubber feet

| MODEL | SIZE | DESIGNED TO FIT |
|----------|--------------------------|---|
| GWS-3810 | 38" L x 10" W x 7 1/2" H | FPB-24L LOF-30LT LOF-30MT-N |
| GWS-4410 | 44" L x 10" W x 7 1/2" H | FPB-30L LOF-36LT LOF-36MT-N |
| GWS-6010 | 60" L x 10" W x 7 1/2" H | FPB-24L+FPB-24L FPB-30L+FPB-24L LOF-48LT |
| GWS-8410 | 84" L x 10" W x 7 1/2" H | FPB-30L+FPB-30L FPB-36L+FPB-30L FPB-36L+FPB-36L LOF-60LT |

ACCESSORIES

LIDS

ROUND LIDS




| MODEL | DIMENSIONS | DESIGNED TO FIT |
|---------|---|-----------------|
| LID-16R | 19" Diameter x 5/8" H - lid height with handle 2" | FPB-16RMT |
| LID-19R | 22 3/8" Diameter x 5/8" H - lid height with handle 2" | FPB-19R Series |
| LID-25R | 28 3/8" Diameter x 5/8" H - lid height with handle 2" | FPB-25R Series |
| LID-29R | 32 1/2" Diameter x 5/8" H - lid height with handle 2" | FPB-29R Series |
| LID-33R | 36 1/2" Diameter x 5/8" H - lid height with handle 2" | FPB-33R Series |

SQUARE LIDS




| MODEL | DIMENSIONS | DESIGNED TO FIT |
|---------|--|-----------------|
| LID-20S | 22 1/4" W x 5/8" H - lid height with handle 2" | FPB-20S Series |
| LID-26S | 28 1/4" W x 5/8" H - lid height with handle 2" | FPB-26S Series |
| LID-32S | 34 1/4" W x 5/8" H - lid height with handle 2" | FPB-32S Series |
| LID-38S | 40 1/4" W x 5/8" H - lid height with handle 2" | FPB-38S Series |

L-SERIES LIDS



| MODEL | DIMENSIONS | DESIGNED TO FIT |
|---------|---|------------------------|
| LID-24L | 29 1/4" L x 8 1/4" W x 2 5/8" H (includes handle) | FPB-24L |
| LID-30L | 35 3/4" L x 8 1/4" W x 2 5/8" H (includes handle) | FPB-30L |
| LID-36L | 41 3/4" L x 8 1/4" W x 2 5/8" H (includes handle) | FPB-36L |
| LID-60L | 53 3/4" L x 8 1/4" W x 2 5/8" H (includes handle) | (2) FPB-24L end-to-end |
| LID-68L | 69 3/4" L x 8 1/4" W x 2 5/8" H (includes handle) | (2) FPB-30L end-to-end |
| LID-84L | 77 3/4" L x 8 1/4" W x 2 5/8" H (includes handle) | (2) FPB-36L end-to-end |

LINE OF FIRE (LOF) LIDS



| MODEL | DIMENSIONS | DESIGNED TO FIT |
|-------------|--|-----------------|
| LID-LOF30 | 32 3/8" L x 8 1/4" W x 2 5/8" H (includes handle) | LOF-30MT |
| LID-LOF36 | 38 3/8" L x 8 1/4" W x 2 5/8" H (includes handle) | LOF-36MT |
| LID-LOF30LT | 32 3/4" L x 8 3/4" W x 2 7/8" H (includes handle) | LOF-30LT |
| LID-LOF36LT | 38 3/4" L x 8 3/4" W x 2 7/8" H (includes handle) | LOF-36LT |
| LID-LOF48LT | 50 3/4" L x 8 3/4" W x 2 7/8" H (includes handle) | LOF-48LT |
| LID-LOF60LT | 62 3/4" L x 8 3/4" W x 2 7/8" H (includes handle) | LOF-60LT |
| LID-LOF30LH | 32 3/4" L x 12 3/4" W x 2 7/8" H (includes handle) | LOF-30LH |
| LID-LOF36LH | 38 3/4" L x 14 3/4" W x 2 7/8" H (includes handle) | LOF-36LH |
| LID-LOF48LH | 50 3/4" L x 16 3/4" W x 2 7/8" H (includes handle) | LOF-48LH |

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ACCESSORIES

HOSES & REGULATORS



FG-32LPHRK



32" Liquid Propane Hose and Regulator Kit, Rated at 85,375 Btu 10" WC.

CSA - AGA / CGA Approved, $\frac{3}{8}$ " Flared ID



FG-60LPHRK



60" Liquid Propane Hose and Regulator Kit, Rated at 130,000 Btu 10" WC.

CSA - AGA / CGA Approved, $\frac{3}{8}$ " Flared ID



FG-12QDK-2



Quick Disconnect Kit for use with Natural Gas or Liquid Propane - 12' (144"), $\frac{1}{2}$ " I.D. Gray PVC Galvanized Steel Hose, Quick Disconnect Fitting and Socket Dust Cap, 160,000 Btu. CSA-AGA/CGA approved to -40 Degrees F



FG-LPRK



Rated at 100,000 Btu Liquid Propane Regulator, $\frac{3}{8}$ " MPT Adapter and Acme Quick Connect. CSA-AGA/CGA approved

ACCESSORIES


VALVES & KEYS

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

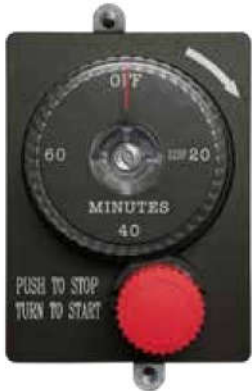

ESTOP1-0H

Mechanical timer with manual emergency shut-off. 1 hour countdown timer.



ESTOP2-5H

Mechanical timer with manual emergency shut-off. 2.5 hour countdown timer.



KVSC-PC-12

Standard Capacity Straight Key Valve with Polished Chrome Cover and 12" Key, 158,000 Btu @ 1/2 PSI



KVHC-PC-12

High Capacity Straight Key Valve with Polished Chrome Cover and 12" Key, 350,000 Btu @ 1/2 PSI



KEY-PC-3

3" Polished Chrome Key for Key Valve



KEY-PC-8

8" Polished Chrome Key for Key Valve



KEY-PC-12

12" Polished Chrome Key for Key Valve



01-387

Connector Ball Valve 3/8" OD Flare x 1/2" FIP



01-487

Connector Ball Valve 1/2" OD Flare x 1/2" FIP



01-266

Flare Ball Valve 3/8" OD Flare x 3/8" OD Flare



01-288

Flare Ball Valve 1/2" OD Flare x 1/2" OD Flare

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to Nickel, which is known to the state of California to cause cancer. (For more information, go to www.p65warnings.ca.gov)

ACCESSORIES

NC LP  FITTINGS



U1-6C-S (steel)

3/8" OD FLARE X 3/8" MIP (TAPPED 1/8" FIP)



U1-6D-S (steel)

3/8" OD FLARE X 1/2" MIP (TAPPED 3/8" FIP)



U3-6C-S (steel)

3/8" OD FLARE X 3/8" FIP



U3-6D-S (brass)

3/8" OD FLARE X 1/2" FIP



49-66 (steel)

3/8" OD FLARE X 3/8" MIP ELBOW



49-68 (brass)

3/8" OD FLARE X 1/2" MIP ELBOW



50-66 (brass)

3/8" OD FLARE X 3/8" FIP ELBOW



50-68 (brass)

3/8" OD FLARE X 1/2" FIP ELBOW



U1-8C-S (steel)

1/2" OD FLARE X 3/8" MIP (TAPPED 1/4" FIP)



U1-8D-S (steel)

1/2" OD FLARE X 1/2" MIP (TAPPED 3/8" FIP)



U1-8E-S (steel)

1/2" OD FLARE X 3/4" MIP (TAPPED 1/2" FIP)



U3-8C-S (steel)

1/2" OD FLARE X 3/8" FIP



U3-8D-S (steel)

1/2" OD FLARE X 1/2" FIP



U3-8E-S (brass)

1/2" OD FLARE X 3/4" FIP



49-86 (brass)

1/2" OD FLARE X 3/8" MIP



49-88 (brass)

1/2" OD FLARE X 1/2" MIP ELBOW



50-86 (brass)

1/2" OD FLARE X 3/8" FIP ELBOW



50-88 (brass)

1/2" OD FLARE X 1/2" FIP ELBOW



U1-10D-S (steel)

5/8" OD FLARE (15/16-16 THREAD) X 1/2" MIP (TAPPED 3/8" FIP)



U1-10E-S (steel)

5/8" OD FLARE (15/16-16 THREAD) X 3/4" MIP (TAPPED 1/2" FIP)



U3-10D-S (steel)

5/8" OD FLARE (15/16-16 THREAD) X 1/2" FIP



U3-10E-S (steel)

5/8" OD FLARE (15/16-16 THREAD) X 3/4" FIP

T100 SERIES TRANQUILINE FLEX CONNECTOR



| MODEL | DESCRIPTION |
|--------------|--|
| T100-9898-10 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 10", with $\frac{3}{8}$ " OD flare nuts |
| T100-9898-16 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 16", with $\frac{3}{8}$ " OD flare nuts |
| T100-9898-22 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 22", with $\frac{3}{8}$ " OD flare nuts |
| T100-9898-28 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 28", with $\frac{3}{8}$ " OD flare nuts |
| T100-9898-34 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 34", with $\frac{3}{8}$ " OD flare nuts |

T102 SERIES TRANQUILINE FLEX CONNECTOR



| MODEL | DESCRIPTION |
|--------------|--|
| T102-9898-10 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 10", with $\frac{3}{8}$ " OD flare nuts |
| T102-9898-16 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 16", with $\frac{3}{8}$ " OD flare nuts |
| T102-9898-22 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 22", with $\frac{3}{8}$ " OD flare nuts |
| T102-9898-28 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 28", with $\frac{3}{8}$ " OD flare nuts |
| T102-9898-34 | $\frac{3}{8}$ " OD ($\frac{1}{4}$ " ID) x 34", with $\frac{3}{8}$ " OD flare nuts |

T200 SERIES TRANQUILINE FLEX CONNECTOR



| MODEL | DESCRIPTION |
|--------------|--|
| T200-9898-10 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 10", with $\frac{1}{2}$ " OD flare nuts |
| T200-9898-16 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 16", with $\frac{1}{2}$ " OD flare nuts |
| T200-9898-22 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 22", with $\frac{1}{2}$ " OD flare nuts |
| T200-9898-28 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 28", with $\frac{1}{2}$ " OD flare nuts |
| T200-9898-34 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 34", with $\frac{1}{2}$ " OD flare nuts |
| T200-9898-46 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 46", with $\frac{1}{2}$ " OD flare nuts |

T202 SERIES TRANQUILINE FLEX CONNECTOR



| MODEL | DESCRIPTION |
|--------------|--|
| T202-9898-10 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 10", with $\frac{1}{2}$ " OD flare nuts |
| T202-9898-16 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 16", with $\frac{1}{2}$ " OD flare nuts |
| T202-9898-22 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 22", with $\frac{1}{2}$ " OD flare nuts |
| T202-9898-28 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 28", with $\frac{1}{2}$ " OD flare nuts |
| T202-9898-34 | $\frac{1}{2}$ " OD ($\frac{3}{8}$ " ID) x 34", with $\frac{1}{2}$ " OD flare nuts |

T300 SERIES TRANQUILINE FLEX CONNECTOR



| MODEL | DESCRIPTION |
|--------------|---|
| T300-9898-10 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 10", with $\frac{5}{8}$ " OD flare nuts |
| T300-9898-16 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 16", with $\frac{5}{8}$ " OD flare nuts |
| T300-9898-22 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 22", with $\frac{5}{8}$ " OD flare nuts |
| T300-9898-28 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 28", with $\frac{5}{8}$ " OD flare nuts |
| T300-9898-34 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 34", with $\frac{5}{8}$ " OD flare nuts |
| T300-9898-46 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 46", with $\frac{5}{8}$ " OD flare nuts |

T302 SERIES TRANQUILINE FLEX CONNECTOR



| MODEL | DESCRIPTION |
|--------------|---|
| T302-9898-10 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 10", with $\frac{5}{8}$ " OD flare nuts |
| T302-9898-16 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 16", with $\frac{5}{8}$ " OD flare nuts |
| T302-9898-22 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 22", with $\frac{5}{8}$ " OD flare nuts |
| T302-9898-28 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 28", with $\frac{5}{8}$ " OD flare nuts |
| T302-9898-34 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 34", with $\frac{5}{8}$ " OD flare nuts |
| T302-9898-46 | $\frac{5}{8}$ " OD ($\frac{1}{2}$ " ID), x 46", with $\frac{5}{8}$ " OD flare nuts |

T400 SERIES TRANQUILINE FLEX CONNECTOR



| MODEL | DESCRIPTION |
|--------------|--|
| T400-9898-34 | 1" OD ($\frac{5}{8}$ " ID), x 34", with $\frac{3}{4}$ " OD flare nuts |

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ACCESSORIES

TFS REPLACEMENT PARTS

ROUND/SQUARE/FLATS

TFS REPLACEMENT PARTS



AF-4025DSILSSO

Electronic IPI Gas Valve with Solenoid



RCAF-3TX UNF

ON/OFF HI/LO Transmitter



VCS-5000MODTC

Ignition Module



AF-4000BP12

Battery Pack (with 12-foot 4-Pin, 4-wire harness, cover plate and 12-foot red & black 2-wire harness for solenoid)



TFS-IGNT-ASSEMBLY

Ignition module, igniter probes, thermocouple, and ignition hood

L-SERIES

TFS REPLACEMENT PARTS



AF-4025DSILSS36

Electronic IPI Gas Valve with Solenoid



VCS-5000MODTC

Ignition Module



AF-4000BP12

Battery Pack (with 12-foot 4-Pin, 4-wire harness, cover plate and 12-foot red & black 2-wire harness for solenoid)



RCAF-3TX UNF

ON/OFF HI/LO Transmitter



PILOTSHIELD-L

Linear Burner Pilot Cover



PILOTCOVER-L

Linear Burner Pilot Shield



PILOTO23300-206

Pilot Assembly

ACCESSORIES

TMSI REPLACEMENT PARTS & VENT KIT

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ROUND/SQUARE/FLATS TMSI REPLACEMENT PARTS



ST3-080-1009

Copreci Manual Gas Valve



ST3-050-1024


Manual Gas Valve Knob for Copreci Valve



TMS-TC-ASSEMBLY

Copreci Thermocouple with ignition hood for non-piloted TMS systems

LINE OF FIRE SERIES TMSI REPLACEMENT PARTS



FG-CONTROL-FP

Faceplate for TMSI Line of Fire systems



FG-GASVALVE-1

Gas valve



FG-GASVALVE-2

Gas valve - Piloted version



FG-CONTROL-KNOB

Control knob for TMSI Line of Fire systems



FG-SPARK-IGN

Spark igniter



FG-IGNITOR-WIRE

Ignition wire for non piloted systems



FG-THERMOCOUPLE

Thermocouple for non piloted systems



FG-IGNIT-ASSY-P

Ignition assembly for piloted systems



FG-IGNITION-HOOD

Ignition hood for piloted and non piloted systems


⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

ACCESSORIES

PANS


ROUND PAN

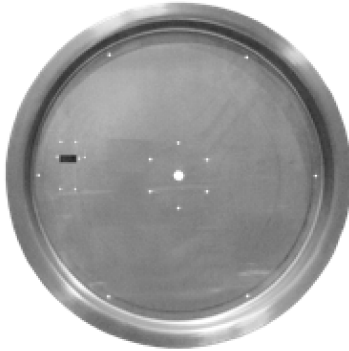

| MODEL | THICKNESS | OUTSIDE DIM. | MIN/MAX CUT OUT | INSIDE PAN DIM. | PAN DEPTH |
|-----------|-----------|-----------------------|-------------------|-----------------|-----------|
| PAN-SS16R | 20 gauge | 18 1/2" including lip | 16 1/2" - 17 1/4" | 16" | 2 1/2" |
| PAN-SS19R | 16 gauge | 22" including lip | 19 1/4" - 21 1/2" | 19" | 2 3/4" |
| PAN-SS25R | 16 gauge | 28" including lip | 25 1/4" - 27 1/2" | 25" | 2 3/4" |
| PAN-SS29R | 16 gauge | 32 1/4" including lip | 30" - 31 3/8" | 29" | 2 3/4" |
| PAN-SS33R | 16 gauge | 36 1/4" including lip | 34" - 35 1/4" | 33" | 2 3/4" |

CENTER HOLE DIMENSION: 7/8"


ROUND FLAT



| MODEL | THICKNESS | OUTSIDE DIM. |
|-------------------------|-----------|--------------|
| NEW PAN-SS19.75D | 16 gauge | 19 3/4" |
| PAN-SS29D | 16 gauge | 29" |
| PAN-SS34D | 16 gauge | 34" |
| PAN-SS44D | 16 gauge | 44" |

CENTER HOLE DIMENSION: 7/8"

SQUARE PAN



| MODEL | THICKNESS | OUTSIDE DIM. | MIN/MAX CUT OUT | INSIDE PAN DIM. | PAN DEPTH |
|-----------|-----------|--------------|-------------------|-----------------|-----------|
| PAN-SS20S | 16 gauge | 22" x 22" | 20 1/4" - 21 3/4" | 20" | 2 3/4" |
| PAN-SS26S | 16 gauge | 28" x 28" | 26 1/4" - 27 3/4" | 26" | 2 3/4" |
| PAN-SS32S | 16 gauge | 34" x 34" | 32 1/4" - 33 3/4" | 32" | 2 3/4" |
| PAN-SS38S | 16 gauge | 40" x 40" | 38 1/4" - 39 3/4" | 38" | 2 3/4" |

CENTER HOLE DIMENSION: 7/8"


ACCESSORIES

PANS & VENT KIT

⚠ WARNING! | CALIFORNIA PROPOSITION 65

This product can expose you to chemicals including Carbon Monoxide, which is known to the State of California to cause birth defects or other reproductive harm. (For more information, go to www.p65warnings.ca.gov)

SQUARE FLAT



| MODEL | THICKNESS | OUTSIDE DIM. |
|------------|-----------|--------------|
| PAN-SS25SF | 16 gauge | 25" x 25" |
| PAN-SS30SF | 16 gauge | 30" x 30" |
| PAN-SS34SF | 16 gauge | 34" x 34" |
| PAN-SS40SF | 16 gauge | 40" x 40" |
| PAN-SS46SF | 16 gauge | 46" x 46" |

CENTER HOLE DIMENSION: 7/8"

LINE OF FIRE PAN




| MODEL | THICKNESS | OUTSIDE DIM. | MIN/MAX CUT OUT | INSIDE PAN DIM. | PAN DEPTH |
|-------------|-----------|--------------------|-------------------|-----------------|-----------|
| PAN-SS3010L | 19 gauge | *32 1/2" x 12 1/2" | 30 1/2" - 12 1/4" | 30" x 10" | 2 1/2" |
| PAN-SS3612L | 19 gauge | *38 1/2" x 14 1/2" | 36 1/2" - 14 1/4" | 36" x 12" | 2 1/2" |
| PAN-SS4814L | 19 gauge | *50 1/2" x 16 1/2" | 48 1/2" - 16 1/4" | 48" x 14" | 2 1/2" |
| PAN-SS3006L | 19 gauge | *32 1/2" x 8 1/2" | 30 1/2" - 8 1/4" | 30" x 6" | 2 1/2" |
| PAN-SS3606L | 19 gauge | *38 1/2" x 8 1/2" | 36 1/2" - 8 1/4" | 36" x 6" | 2 1/2" |
| PAN-SS4806L | 19 gauge | *50 1/2" x 8 1/2" | 48 1/2" - 8 1/4" | 48" x 6" | 2 1/2" |
| PAN-SS6006L | 19 gauge | *62 1/2" x 8 1/2" | 60 1/2" - 8 1/4" | 60" x 6" | 2 1/2" |

*includes lip

CENTER HOLE DIMENSION: 7/8"

VENT KIT (6"x12")

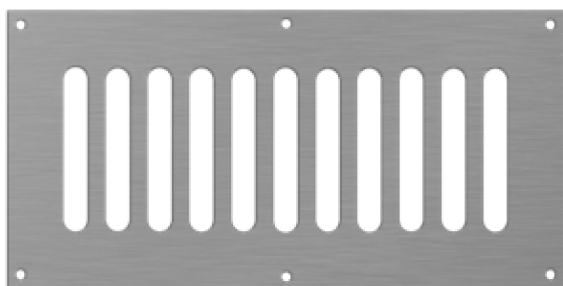

VENT-6X12SS



Includes two (2) Stainless Steel 6" H x 12" W vents with mounting screws. Each vent provides 18 square inches of ventilation.

NATURAL GAS : PIPE SIZING CHART

| Length of Pipe in Feet | 1/2" | 3/4" | 1" | 1 - 1/4" | 1 - 1/2" | 2" | 2 - 2 1/2" | 3" | 4" |
|------------------------|------|------|-----|----------|----------|------|------------|------|------|
| 10 | 108 | 230 | 387 | 793 | 1237 | 2259 | 3640 | 6434 | - |
| 20 | 75 | 160 | 280 | 569 | 877 | 1610 | 2613 | 5236 | 9521 |
| 30 | 61 | 129 | 224 | 471 | 719 | 1335 | 2165 | 4107 | 7859 |
| 40 | 52 | 110 | 196 | 401 | 635 | 1143 | 1867 | 3258 | 6795 |
| 50 | 46 | 98 | 177 | 364 | 560 | 1041 | 1680 | 2936 | 6142 |
| 60 | 42 | 89 | 159 | 336 | 513 | 957 | 1559 | 2684 | 5647 |
| 70 | 38 | 82 | 149 | 317 | 476 | 896 | 1447 | 2492 | 5250 |
| 80 | 36 | 76 | 140 | 239 | 443 | 840 | 1353 | 2315 | 4900 |
| 90 | 33 | 71 | 133 | 275 | 420 | 793 | 1288 | 2203 | 4667 |
| 100 | 32 | 68 | 126 | 266 | 411 | 775 | 1246 | 2128 | 4518 |
| 125 | 28 | 60 | 117 | 243 | 369 | 700 | 1143 | 1904 | 4065 |
| 150 | 25 | 54 | 105 | 215 | 327 | 625 | 1008 | 1689 | 3645 |
| 175 | 23 | 50 | 93 | 196 | 303 | 583 | 993 | 1554 | 3370 |
| 200 | 22 | 47 | 84 | 182 | 280 | 541 | 877 | 1437 | 3160 |
| 300 | 17 | 37 | 70 | 145 | 224 | 439 | 686 | 1139 | 2539 |

- Natural Gas (NG) flow is given in thousands of BTU/hr. One cubic foot of NG gas - 1000 BTU
- Nominal pressure at the burner for Natural Gas is 3.5" of water column. (Typical machine supply 5"-7")
- Pipe length must include additional length for all fittings. Add approximately 5 feet of pipe per fitting.
- Natural Gas Example: A machine with a burner that requires 440,000 BTU would need a 1 -1/4" pipe for a 20" long run.

LIQUID PROPANE : PIPE SIZING CHART

| Length of Pipe in Feet | 1/2" | 3/4" | 1" | 1 - 1/4" | 1 - 1/2" | 2" | 2 - 2 1/2" | 3" | 4" |
|------------------------|------|------|------|----------|----------|------|------------|-------|-------|
| 10 | 275 | 567 | 1071 | 2205 | 3307 | 6221 | 10140 | 17990 | 35710 |
| 20 | 189 | 393 | 732 | 1496 | 2299 | 4331 | 7046 | 12510 | 25520 |
| 30 | 152 | 315 | 590 | 1212 | 1858 | 3465 | 5695 | 10110 | 20620 |
| 40 | 129 | 267 | 504 | 1039 | 1559 | 2992 | 4778 | 8481 | 17300 |
| 50 | 114 | 237 | 448 | 913 | 1417 | 2646 | 4343 | 7708 | 15730 |
| 60 | 103 | 217 | 409 | 834 | 1275 | 2394 | 3908 | 6936 | 14150 |
| 70 | 89 | 185 | 346 | 724 | 1086 | 2047 | 3329 | 5908 | 12050 |
| 80 | 78 | 162 | 307 | 630 | 976 | 1811 | 2991 | 5309 | 10830 |
| 90 | 69 | 146 | 275 | 567 | 866 | 1606 | 2654 | 4711 | 9613 |
| 100 | 63 | 132 | 252 | 511 | 787 | 1496 | 2412 | 4281 | 8736 |
| 125 | 54 | 112 | 209 | 439 | 665 | 1282 | 2083 | 3618 | 7382 |
| 150 | 48 | 100 | 185 | 390 | 590 | 1138 | 1808 | 3210 | 6549 |
| 175 | 43 | 90 | 168 | 353 | 534 | 1030 | 1637 | 2905 | 5927 |
| 200 | 40 | 83 | 155 | 325 | 491 | 947 | 1505 | 2671 | 5450 |
| 300 | 37 | 77 | 144 | 303 | 458 | 887 | 1404 | 2492 | 5084 |

- Liquid Propane (LP) Gas flow is given in thousands of BTU/hr. - One cubic foot of LP gas - 2516 BTU.
- This chart refers to low pressure LP, after regulation, Standard nominal pressure at the burner for Liquid Propane Gas is 11" of water column.
- Pipe length must include additional length for all fittings. Add approximately 5 feet of pipe per fitting.
- LP Example: A machine with a burner that requires 440,000 BTU would need a 1" pip for a 20' long run.

NOTE: The sizing charts above list the specific pipe sizes required for the amount of BTU's for a new gas line installations. If you are using an existing gas line you must take into consideration the existing gas line capacities to ensure you will have proper pressure. **This chart is for reference only, we recommend you consult with a Licensed Plumber/Gas Fitter or NFPA54 (National Fuel Gas Code - current edition) for more details.**

PROPANE TANK BTU'S

| 11 lb. Tank | 20 lb. Tank | 30 lb. Tank | 40 lb. Tank | 50 lb. Tank |
|--------------------|-----------------|-----------------|------------------|-------------------|
| = 2.98 gal. of gas | = 5 gal. of gas | = 7 gal. of gas | = 10 gal. of gas | = 25 gal. of gas |
| = 256,205 Btu's | = 430,000 Btu's | = 640,000 Btu's | = 860,000 Btu's | = 2,159,400 Btu's |

To determine how long a gas appliance will operate on one tank of gas first determined the total Btu's of the propane tank. Divide that number by the total Btu's of your appliance. This will provide to the approximate total time your gas appliance will operate on the tank of gas.

Example: I have a LP gas fire pit rated at 105,000 Btu's and I am considering using a 20lb. Propane tank to operate it. If you take 430,000 Btu's (total Btu's of a 20lb. tank) divided by 105,000 Btu's the total operating time will be approximate 4.09 hours.

OTHER REFERENCES

CAD DETAILS

Firegear has partnered with CADdetails to provide you free and easy access to CAD drawings in multiple CAD and BIM formats, specifications, 3D models, product brochures, video and related documents. To access the Firegear CADdetails files, visit our home page www.firegearoutdoors.com, click on the CADdetails logo and follow the registration process.

SPEC BOOK

Our catalog is a comprehensive list of all products we sell. We understand you may need more detailed information; including clearance to combustibles, product dimensions, etc. This information can be found on our website either in our Specification Book.

INSTALLATION MANUALS

If you need the installation manual for any Firegear product, they can be found on our website.

ICON LEGEND

| | | | |
|--|---|--|---|
|  Thermocouple Flame Sense |  Propane |  CSA Listed |  New product |
|  Thermocouple Manual Safety |  Available in Canada |  Made in the USA | |
|  Match Throw |  UL Listed |  Viewable on CADdetails | |
|  Natural Gas |  Intertek Listed |  Constructed of Stainless Steel | |

SALES SUPPORT | 1.888.699.6167

TECH SUPPORT | 1.855.498.8324

firegearoutdoors.com



www.firegearoutdoors.com