


Why Burning Spur ?

Why Burning Spur?

- Constructed of 304 Stainless Steel
- Unique design for natural drainage
- Internal dam built inside the center of the Burning Spur hub helps prohibit water flowing back into the gas line
- Legs feature a pitched design - water runs off
- Cooling points between the legs help prevent heat transfer to the outer edge which can cause cracking of the fire pit finished top
- Bottom features weep holes for water release so there is no freeze and thaw damage
- Stock Sizes: 12", 16" 22" 31" and 36" (measured tip to tip)
- LP Conversion Kits available

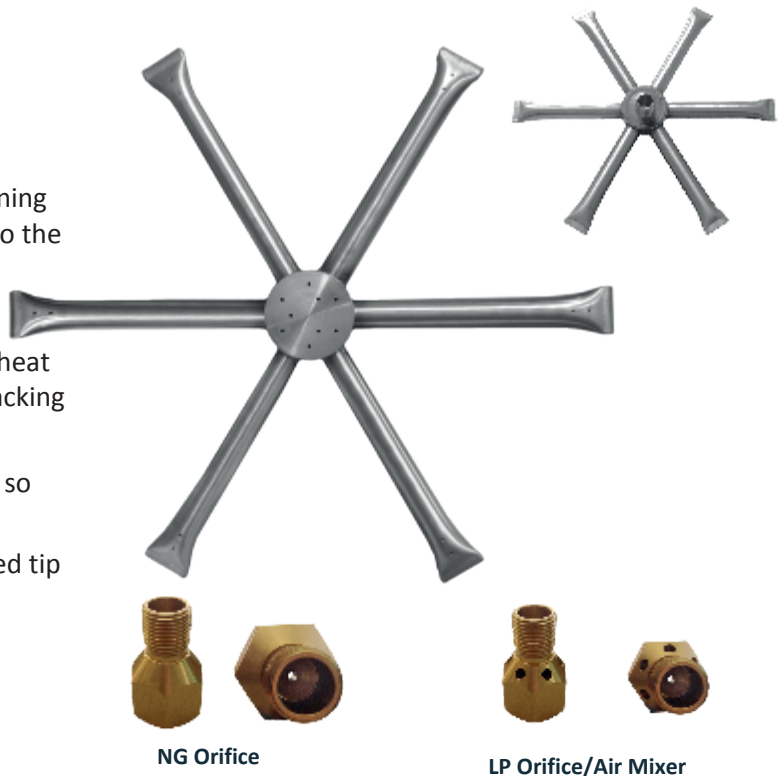

Why Firestar ?

Why Firestar?

- Constructed of 304 Stainless Steel
- Unique design for natural drainage and port holes up installation
- Internal dam built inside the center of the Firestar helps prohibit water flowing back into the gas line
- Legs feature a pitched design - water runs off
- Cooling points between the legs help prevent heat transfer to the outer edge which can cause cracking of the fire pit finished top
- Bottom is tack welded to allow water to weep out so there is no freeze and thaw damage
- Stock Sizes: 12", 18" 24" 30", 36" and 48" (measured tip to tip)
- LP Conversion Kits available



Burning Spur Kit and Burning Spur Only

Spur Kit	Spur Only	DESCRIPTION	LP ORIFICE PART #
DBS-12K	DBS-12	12" Stainless Steel Burning Spur	OAS-LP52
DBS-16K	DBS-16	16" Stainless Steel Burning Spur	OAS-LP45
DBS-22K	DBS-22	22" Stainless Steel Burning Spur	OAS-LP35
DBS-31K	DBS-31	31" Stainless Steel Burning Spur	OAS-LP29
DBS-36K	DBS-36	36" Stainless Steel Burning Spur	OAS-LP25



Burning Spur only includes: Burner, Orifice, 1/2" Flare x 1/2" OD FIP

Burning Spur Kit includes: Burner, Orifice, 1/2" OD Flare x 1/2" MIP, 46" Stainless Steel Tranquiline Gas Flex, 1/2" OD Flare x 1/2" FIP, Key Valve, Polished Chrome Cover and 8" Polished Chrome Key

Firestar Kit and Firestar Burner Only

Firestar Kit	Firestar only	DESCRIPTION	LP ORIFICE PART#
DFS-12K	DFS-12	12" Stainless Steel Firestar	OAS-LP52
DFS-18K	DFS-18	18" Stainless Steel Firestar	OAS-LP45
DFS-24K	DFS-24	24" Stainless Steel Firestar	OAS-LP35
DFS-30K	DFS-30	30" Stainless Steel Firestar	OAS-LP29
DFS-36K	DFS-36	36" Stainless Steel Firestar	OAS-LP25
DFS-48K	DFS-48	48" Stainless Steel Firestar	OAS-LP22



Firestar only includes: Burner, Orifice, 1/2" Flare x 1/2" OD FIP

Firestar Kit includes: Burner, Orifice, 1/2" OD Flare x 1/2" MIP, 46" Stainless Steel Tranquiline Gas Flex, 1/2" OD Flare x 1/2" FIP, Key Valve, Polished Chrome Cover and 8" Polished Chrome Key

Burning Spurs and Firestar's feature a 5 Year Limited Warranty to Consumer, 1 year in Commercial Applications

Fire Rings

FG-FR-19S-R	19" Round Stainless Steel Fire Ring - 3/8" Stainless Steel Double Ring Pipe, Punched Ports, 1/2" Female Pipe Connection
FG-FR-24S-R	24" Round Stainless Steel Fire Ring - 3/8" Stainless Steel Double Ring Pipe, Punched Ports, 1/2" Female Pipe Connection
FG-FR-30S-R	30" Round Stainless Steel Fire Ring - 3/8" Stainless Steel Double Ring Pipe, Punched Ports, 1/2" Female Pipe Connection
FG-FR-36S-R	36" Round Stainless Steel Fire Ring - 3/8" Stainless Steel Double Ring Pipe, Punched Ports, 1/2" Female Pipe Connection
FG-SB-F	Universal LP Conversion Kit for all size Fire Rings



BTU output is determined by the supply line size and the distance of the supply line run. Fire Rings can be used with Natural Gas and Liquid Propane. Liquid Propane use requires FG-SB-F LP Conversion Kit. Flame height is directly related to the BTU output of the unit. For maximum flame height, allow for 300,000 BTU for the 19" and 400,000 BTU for the 24, 30 and 36" Fire Rings. Fire Rings feature a 1 Year Limited Warranty.

Burning Spur Kits and Firestar Kits and Burner Only BTU Chart



Burning Spur Kit and Burning Spur Burner Only

Model	BTU - NG	Orifice Size - NG	BTU - LP	Orifice Size - LP
DBS-12 or DBS-12K	42,000 BTU	OAS-NG38	33,000 BTU	OAS-LP52
DBS-16 or DBS-16K	60,000 BTU	OAS-NG31	55,000 BTU	OAS-LP45
DBS-22 or DBS-22K	100,000 BTU	OAS-NG22	99,000 BTU	OAS-LP35
DBS-31 or DBS-31K	160,000 BTU	OAS-NG08	150,000 BTU	OAS-LP29
DBS-36 or DBS-36K	183,000 BTU	OAS-NG03	182,000 BTU	OAS-LP25



Firestar Kits and Firestar's Only

DFS-12K OR DFS-12	42,000 BTU	OAS-NG38	33,000 BTU	OAS-LP52
DFS-18K OR DFS-18	60,000 BTU	OAS-NG31	55,000 BTU	OAS-LP45
DFS-24K OR DFS-24	100,000 BTU	OAS-NG22	99,000 BTU	PAS-LP35
DFS-30K OR DFS-30	160,000 BTU	OAS-NG08	150,000 BTU	OAS-LP29
DFS-36K OR DFS-36	183,000 BTU	OAS-NG03	183,000 BTU	OAS-LP25
DFS-48K OR DFS-48	210,000 BTU	OAS-NG01	200,000 BTU	OAS-LP22

Disclaimer: All products maximum BTU's are dependent upon proper gas pipe sizing. Gas flex connectors can also affect BTU's. As a result your maximum BTU's may vary. BTU listings are based on 7" W.C. for Natural Gas and 10" W.C. for Propane at the burner orifice.