

TMS - ROUND AND SQAURE SPECIFICATIONS WITH BURNING SPUR

Model: Natural Gas (NG)	Model: Propane Gas (LP)	A Pan Depth	B Min/Max Install Opening	C Inside Pan	D Ground Level	E Side Wall	F Combustible Ceiling	G Combustible Floor
FPB-G25RBSTMS-N	FPB-G25RBSTMS-P	2.500"	25"/25.5"	23.875"	8"	19"	69"	18"
FPB-G29RBSTMS-N	FPB-G29RBSTMS-P	2.500"	30"/31.35"	29"	8"	19"	69"	18"
FPB-G33RBSTMS-N	FPB-G33RBSTMS-P	2.500"	34"/35.25"	33"	8"	19"	69"	18"
FPB-19RBSTMS-N	FPB-19RBSTMS-P	2.625"	19.25/21.5"	19"	8"	16"	54"	18"
FPB-25RBSTMS-N	FPB-25RBSTMS-P	2.625"	25.25"/27.5"	25"	8"	19"	69"	18"
FPB-20SBSTMS-N	FPB-20SBSTMS-P	2.625"	20.25"/21.75"	20"	8"	16"	54"	18"
FPB-26SBSTMS-N	FPB-26SBSTMS-P	2.625"	26.25"/27.75"	26"	8"	19"	69"	18"
FPB-32SBSTMS-N	FPB-32SBSTMS-P	2.625"	32.25"/33.75"	32"	8"	19"	69"	18"
FPB-38SBSTMS-N	FPB-38SBSTMS-P	2.625"	38.25"/39.75"	38"	8"	19"	69"	18"

Table 1. Fire pit Dimensions

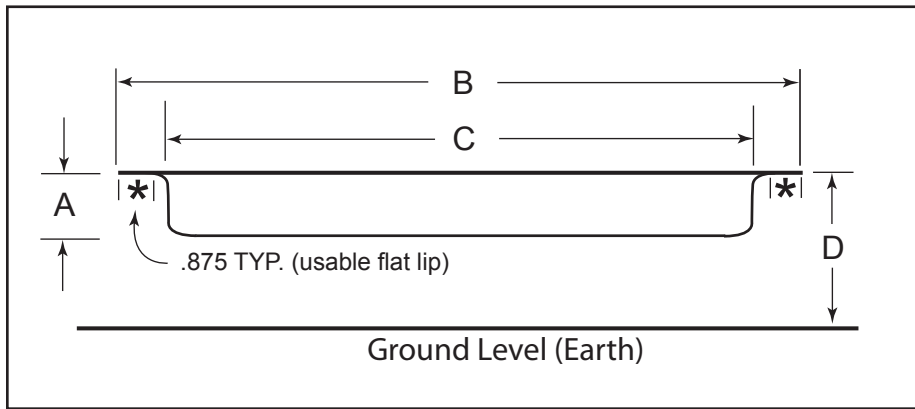


Figure 1. Fire pit dimensions; refer to Table 1. (Dimensions applicable to round or square pans)

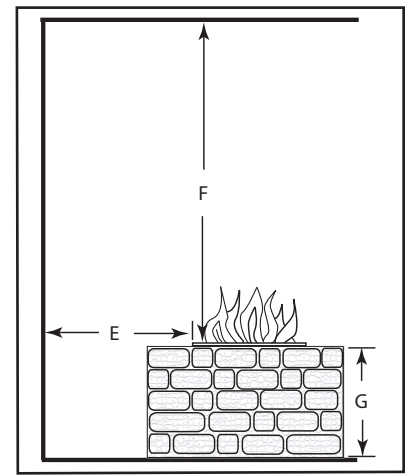


Figure 2. Clearance to Combustibles
(Not to be used in an enclosed space)

Model: Match Throw NG	NG Factory Orifice	Model Match Throw LP	LP Factory Orifice	BTU Natural/Propane
FPB-G25RBSTMS-N	#29	FPB-G25RBSMT-P	#41	65,000
FPB-G29RBSTMS-N	#29	FPB-G29RBSMT-P	#41	65,000
FPB-G33RBSTMS-N	#29	FPB-G33RBSMT-P	#41	65,000
FPB-19RBSTMS-N	#29	FPB-19RBSMT-P	#41	65,000
FPB-25RBSTMS-N	#29	FPB-25RBSMT-P	#41	65,000
FPB-20SBSTMS-N	#29	FPB-20SBSMT-P	#41	65,000
FPB-26SBSTMS-N	#29	FPB-26SBSMT-P	#41	65,000
FPB-32SBSTMS-N	#29	FPB-32SBSMT-P	#41	65,000
FPB-38SBSTMS-N	#29	FPB-38SBSMT-P	#41	65,000

Table 2. Btu Specifications

Disclaimer: Btu listings are based on 7.0"WC for Natural Gas and 11.0"WC for Liquid Propane (LP) at the burner orifice. Flex line size and proper gas pipe sizing will also affect Btu's. As a result your Btu may vary slightly from Table 2 specifications.

Pressure	NG	LP
Min. Inlet	3.5" WC	8.0" WC
Max. Inlet	10.5" WC	13.0" WC
Normal Inlet	7.0" WC	11.0" WC

Table 3. Gas Pressures