











# **ROTISSERIE MOUNTING BRACKET KIT**









**INSTALLER:** Leave these instructions with consumer.  
**CONSUMER:** Retain for future reference.

## **HEAVY-DUTY MOUNTING BRACKET KITS**

Grill model compatibility	Bracket kit model #	Left bracket	Right bracket
A660 A790	3600-62		
	3600-62-L		
A430 A540 A830*	3600-63		
	3600-63-L		

\* A830 model grills are not compatible with 3600-63-L bracket kits.

## **SUPER HEAVY-DUTY MOUNTING BRACKET KITS**

Grill model compatibility	Bracket kit model #	Left bracket	Right bracket
E1060	3600-60		
	3600-60-L		
E660 A660 E790 A790	3600-61		
	3600-61-L		


See reverse for bracket installation

## MOUNTING BRACKET INSTALLATION


### **3600-60(-L), 3600-61(-L), and 3600-62(-L) Models:**

See the illustrations on the reverse side of this sheet to identify and to note the install orientation of the left and right brackets.

1. Locate and remove the cover bracket (or existing old mounting bracket if applicable) by removing the screws and lifting the bracket upward and off the grill side wall. Retain the screws for later installation. The bracket may be discarded. See Fig. 2-1.
2. Align the new mounting bracket over the exposed holes and secure the bracket using the existing screws (see Fig. 2-2).
3. Repeat steps 1 and 2 for the other bracket.
4. Refer to the ROTISSERIE INSTRUCTIONS section of the grill owner's manual or the instructions provided with the rotisserie kit for rotisserie setup and use.

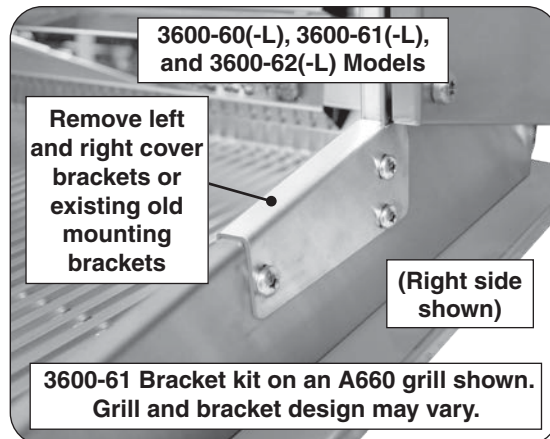

**Fig. 2-1** Remove cover brackets (or existing old mounting brackets)

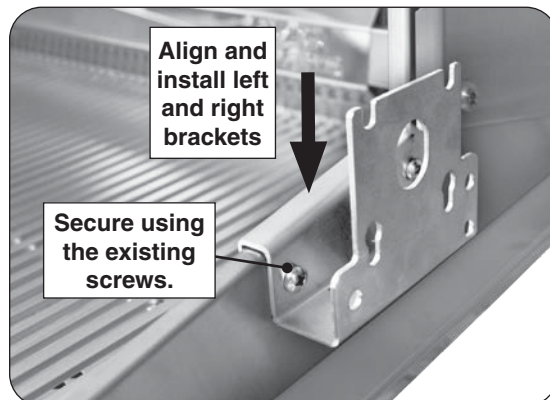


**Fig. 2-2** Install mounting brackets to grill


### **3600-63(-L) Models:**

See the illustrations on the reverse side of this sheet to identify and to note the install orientation of the left and right brackets.

1. Locate and remove the knock-outs using a flathead screwdriver (see Fig. 2-3), or if applicable, remove the existing old mounting bracket.
2. Align the new mounting bracket over the newly exposed holes and secure the bracket using the provided bolts, washers, and nuts (see Fig. 2-4).
3. Repeat steps 1 and 2 for the other bracket.
4. Refer to the ROTISSERIE INSTRUCTIONS section of the grill owner's manual or the instructions provided with the rotisserie kit for rotisserie setup and use.

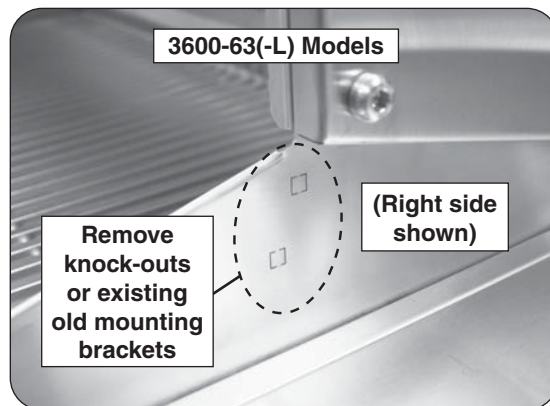

**Fig. 2-3** Remove knock-outs (or existing old mounting brackets)

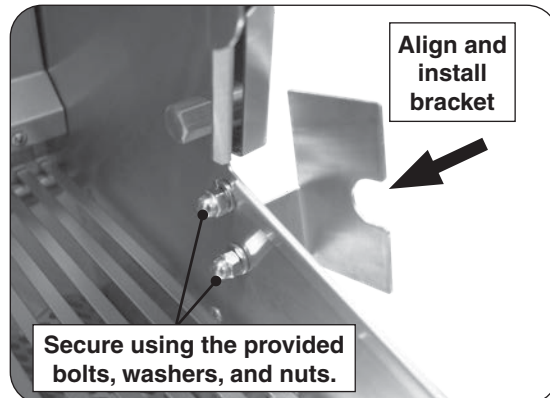

**Fig. 2-4** Install mounting bracket to grill