

# GI-32-ZC Electric Fireplace Insert

**SimpliFire**<sup>®</sup>  
Fire Made Simple



GI-32-ZC shown with small three-sided surround

## Easily transform a dated fireplace.

Introducing the most affordable way to turn a dated fireplace into a stunning focal point—the SimpliFire Electric Fireplace Insert. With a tall viewing area and traditional-style logs, it adds ambiance and comfort without a major remodel.

### Features

- Install into a wood fireplace opening with a surround kit or any framed opening with the self-trimming design
- Operate at just pennies an hour with adjustable heat
- Easy plug-in with attached cord
- Low maintenance and energy efficient thanks to LED technology
- Easy control with the intuitive, multifunction remote
- Zone-heat your space with warmth where you want it while cutting monthly energy bills
- Stay warm with supplemental heat comparable to a freestanding space heater (1500W)




# Restore the focal point of your home in two easy steps.

## 1. Measure your existing fireplace opening

Minimum dimensions for installation into an existing fireplace

Model	Front Width	Rear Width	Height	Depth
GI-32-ZC	29-1/8" [740]	24" [610]	19-3/4" [502]	8-3/4" [222]

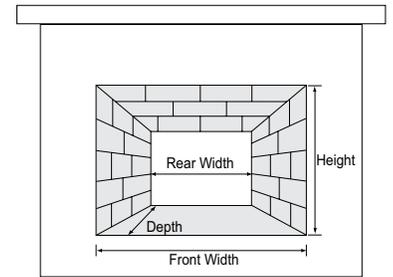



## 2. Select your surround

A surround fills the gap between the fireplace insert and existing fireplace opening. Choose from two four-sided configurations with removable bottom piece.

Surround Size	Width	3-Sided Height	4-Sided Height	Depth
Small	36-1/2" [927]	27-1/4" [692]	31-1/4" [794]	13/16" [20]
Large	42-1/2" [1080]	28-3/4" [730]	32-3/4" [832]	13/16" [20]




## Specifications

WATTS	Front Width (A)	Front Height (B)	Unit Height (C)	Depth (D)	Depth (E)	Unit Width (F)	Viewing Area (G x H)
1,500	31-7/16" [799]	20-9/16" [522]	19" [483]	8-3/4" [222]	8" [203]	28-1/8" [714]	27-3/8" x 16" [695 x 406]

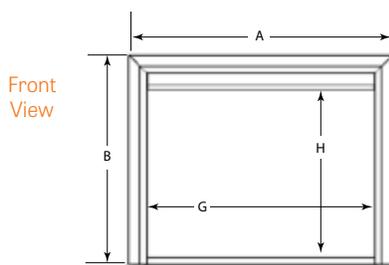

## Framing Dimensions

Framing Width (A)	Framing Height (B)*	Framing Depth (C)	Framing Width (D)	Framing Depth (E)	Framing Depth (F)
29-3/8" [746]	19-3/4" [502]	8-3/4" [222]	39-1/4" [997]	27-3/4" [705]	19-5/8" [498]

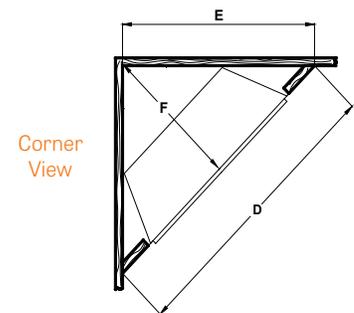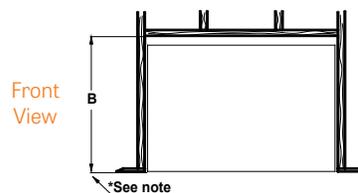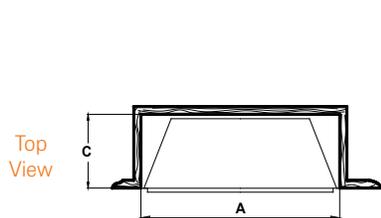

\*If installing the appliance on a sub floor, the appliance must be shimmed to accommodate the finishing floor thickness. B will increase accordingly.