

MCVST42

ZERO CLEARANCE **DIRECT VENT** SEE-THROUGH GAS FIREPLACE





MCVST42

ZERO CLEARANCE DIRECT VENT SEE-THROUGH GAS FIREPLACE

Model MCVST42N/NE Fuel Gas Control Input Max. Input Min.

FE (P.4.1-15)

Natural Millivolt / IPI 30.250 BTU 20,750 BTU 57.56% / 59.55% Tempered

MCVST42LP/LPE Propane Millivolt / IPI 29.000 BTU 23,000 BTU 58.56% / 55.32% Tempered

MCVST42NH/NHE MCVST42LPH/LPHE Natural Millivolt / IPI 31.000 BTU 21,000 BTU 66.45% / 68.58% Ceramic Ceramic

Propane Millivolt / IPI 29.250 BTU 23,000 BTU 67.88% / 70.36%



STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Safety Screen Barrier



OPTIONAL FEATURES

Heat activated with variable speed control

Surrounds

- Hearth Mount 4" Wide (Covers 44 5/8" W x 38 1/8" H)
- Picture Frame 4" Wide (Covers 44 5/8" W x 40 1/8" H)
- Picture Frame 1 5/8" Wide (Covers 40 ¹/₈" W x 35 ⁵/₈" H)

Porcelain Reflective Liner

Brick Refractory Liner

Traditional

Glass Tray

For use with Bronze Glass Media, Cannonballs, and Driftwood Log Set

Accent Lighting

For use with the Glass Tray

Oak (8 piece) Set, and Driftwood (6 Piece) Set

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control





DESIGNER CLEAN VIEW™ FIREPLACES

Make the most of the best view in the house with our line of Zero Clearance Direct Vent See-Through Gas Fireplaces. Ideally suited for new construction or renovations anywhere in your home.

OPTIONS



Model MCVST42NH See-Through Fireplace (Natural Gas), ZCV42S2PFBL Surround Picture Frame 1 5/8" Wide, MST42GT Glass Tray, ZG5C Glass Media (Bronze x5), RBCB1 Cannonballs, MST42PL Porcelain Liner.

STYLING



M42LOG4 Oak Log Set





M42LOG3 Driftwood Log Set


RBCB1 Multi-colored Cannonballs



MST42RLT Traditional

MQG5C Decorative Ember Glass

	RONT EW	TOP VIEW	END VIEW		
Α	43 1/16"	• • • • •	-		
В	37 1/16"	-	-		
C	33 11/16"	-	-		
D	27 3/16"	-	-		
Ε	2 1/2"	-	-		
F	32 1/2"	-	-		
G	2"	-	-		
Н	3 1/8"	-	-		
	3 1/2"	-	-		
J	7 1/4"	-	-		
К	-	23 1/8"	-		
L	-	24 ¹/₄"	-		
Μ	-	-	24 1/4"		
Ν	-	-	51 ½"		
0	-	-	42 7/8"		

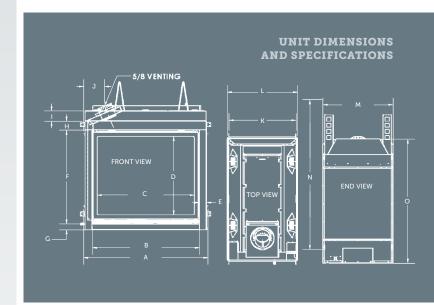

UNIT AND FRAMING SPECIFICATIONS (IN.)

Models		Height Framing				- 1-	
MCVST42	51 ½"	51 ³/8″	43 1/16"	43 ½"	24 ¹ / ₄ "	23 1/16"	



2340 Logan Avenue

Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960

www.kingsmanfireplaces.com

MCVST42

ZERO CLEARANCE **DIRECT VENT** SEE-THROUGH GAS FIREPLACE





Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: ANSI Z21.88-2017 • CSA 2.33-2017, CSA 2.17-2017 Vented Gas Fireplace Heater.





FOR CALIFORNIA RESIDENTS ONLY:
WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.