


ZV3600

ZERO CLEARANCE **VENTED** GAS FIREPLACE



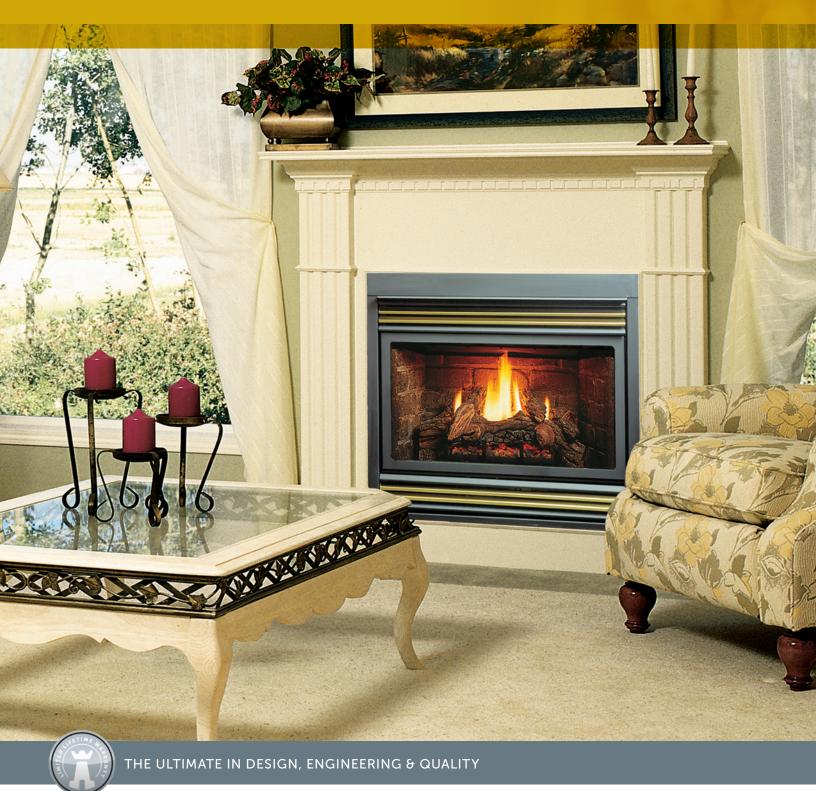

2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960 www.kingsmanfireplaces.com

Model Flue Fuel Input BTU FE (P.4.1-02) ZV3600N ZV3600NE Top Natural 14,000-21,000 BTU 37.9% ZV3600LP ZV3600LPE Top Propane 17,000-20,000 BTU 43.7%

STANDARD FEATURES*

- Hi/low Millivolt or IPI valve system with variable adjustment of flame and BTU
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Safety Screen Barrier*

OPTIONAL FEATURES*



Safety Screen Barrier

Available in Black, and Classic Series Black with Antique, Chrome or Polish Brass Accents

Surrounds Wide

Brushed Chrome or Black Coverage • ZV3600 - 34 1/2" h x 41 1/8" w

Fan Kit

Grills

Heat activated blower with variable speed control

Brick Refractory Liner

Three piece

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

Log Sets

Choose from our LOGC42 Classic Oak Four Piece, LOGC43 Traditional Oak Four Piece or LOGC44 Burnt Oak Eight Piece

* All gas fireplaces manufactured as of January 1, 2015 will include a Safety Screen Barrier



ete unit. Dis


iss with vour local Ki



Unit illustrated is a ZV3600N Zero Clearance Vented Fireplace – Natural Gas, with LOGC44, Z36GBC Grills Classic Chrome, and a Z36RL Brick Liner.



Unit illustrated is a ZV3600N Zero Clearance Vented Fireplace – Natural Gas, with LOGC42, Z36GBP - Grills Classic Polish Brass.

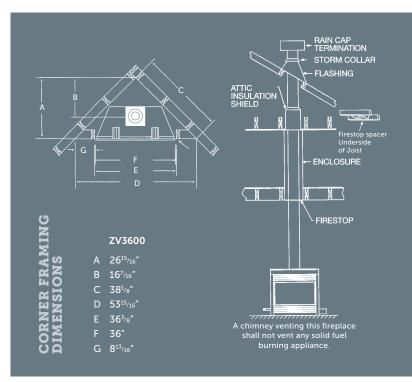

UNIT AND FRAMING SPECIFICATIONS (IN.)

Models	Height Actual	Framing	Front W Actual	/idth Framing	Depth Actual	Framing
ZV3600	33³/4″	34″	36″	36³⁄8"	15³/4″	15³/8″

