

ZVF33

ZERO CLEARANCE **VENT FREE** GAS FIREPLACE



www.kingsmanfireplaces.com



ZVF33	FUEL	GAS CONTROL	MAX.	LOW
ZVFB3330MAN	Natural	Manual	30,000	13,000
ZVFB3330MAP	Propane	Manual	30,000	22,000
ZVFB3330MVN	Natural	Millivolt	30,000	13,000
ZVFB3330MVP	Propane	Millivolt	30,000	22,000

STANDARD FEATURES

- Hi/low Millivolt or manual valve with variable adjustment of flame and BTU
- An ODS sensor that constantly monitors the room air and provides 100% gas shut off if oxygen is reduces below acceptable levels
- Black Canopy Hood
- Matchless Piezo Ignition
- Pull Screen
- Decorative Ash Bed
- Wall Switch Control (for Millivolt Systems Only)

OPTIONAL FEATURES

Fan Kit

Heat activated blower with variable speed control

Grille

Grills available in Black, Classic Series Black with Antique, Chrome, or Polish Brass accents

Surrounds Wide

Antique, Chrome, Polish Brass **Coverage:**

• 31 3/16" h x 36 5/8" w

Surrounds Slim Line (Louvered Units)

Antique, Chrome, Gun Metal Black, Polish Brass Coverage:

• 30 7/8" h x 33 7/8" w



Thermostat (Millivolt)

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control (Millivolt)

On/Off, Thermostat or Hi/Lo On/Off

Log Sets

LOGF18 and LOGF24

Brick Liner


Traditional



Traditional Brick Liner RLT

CORNER FRAMING DIMENSIONS (IN.)

:	Α :	В	С	D	Е	F
ZVF33	30¾″	421/8"	60⁵⁄₃″	331/8"	32½″	139/16"

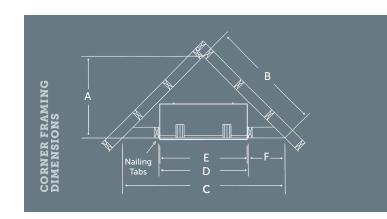

VENT-FREE FIREBOX UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models		Height Framing		Width Framing	- 1-	Depth Framing
ZVF33	30 ½"	31"	32 ½"	33 1/8"	14"	14"

The ultimate in Zero Clearance Vent-Free Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.





LOGF18 Log Set

LOGF24 Log Set

