

IntelliFire Touch Ignition System IntelliFire Touch is the most advanced and intuitive IntelliFire system, making operating your fireplace simple, smart and safe. Select the wireless wall switch or touchscreen remote control for the solution that fits your life.

Direct Vent Technology Direct Vent gas inserts remove 100% of combustion exhaust and fumes to the outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean indoor air quality.

SINGLE-SIDED SPECIFICATIONS

MODEL	.	FRONT WIDTH			REAR WIDTH				HEIGHT	1	DEPTH	01.4	GLASS SIZE		DTU/UD INDUT	
	L	ACTUA	L FF	RAMING	ACTU	AL F	RAMING	ACTUAL	L FRAMING	ACTUAL	FRAMING		ASS SIZE		BTU/HR INPUT	
MARQ3	6IN	61" [1549mr		9-1/2" [1 i11mm]	59-1/4' 505mr		9-1/2" [1 511mm]	57-5/8" [464mm]		24" [610mm]	24" [610mm]	35-7/8 31-1/1	6" [911m		5,000 - 44,0 1,000 - 43,5	
MARQ4	2IN	67" [1702mr		5-9/16" [665mm]	65-5/1 [1659m		5-9/16" [665mm]	62-5/8" [⁻ 591mm]		24" [610mm]	24" [610mm]		6" [1064mr),000 - 54,5 3,500 - 47,5	
			Top View				Front '	View		Left Side V	/iew	X	916mm] Right Sid	e View		
		N —	L	→	r	· •	<u> </u>	· · ·			EL ECITORAL ACCESS		← κ -	HEAT-PORT		
MODEL	Δ.	N-N-N-N-N-N-N-N-N-N-N-N-N-N-N-N-N-N-N-			M		B 8 C		GA GE	s s s s s s s s s s s s s s s s s s s	ACCESS	N	H	HEAT-PORT		D
MODEL	A	B	C	D	E	D F	B B C	H	GA GC CE	s s s s s s s s s s s s s s s s s s s	ACCESS	N		P	Q	
MODEL MARQ36IN	A 61" [1549mm]	B 35-7/8" [911mm]	<u> </u>	D 31-1/16" [789mm]	E 57-5/8" [1 484mm]	F 35-3/16" [894mm]		54-15/16" 41	GA GE	S S S S S S S S S S S S S S S S S S S	ACCESS	N 29-5/8* [752mm]	H	HEAT-PORT		R 16-1 [410r

SEE-THROUGH SPECIFICATIONS

MODEL		FRONT WIDTH			REAR WIDTH			HEIGHT			DEPTH			7.	DTIJ/UD INDUT	
MODEL	AC	TUAL	FRAMING	ACT	JAL F	RAMING	ACTUA	AL FF	RAMING	ACTUAL	FRAI	VING	GLASS SIZE		BTU/HR INPUT	
MARQ42STIN		60" 24mm]	60-1/4" [1 530mm]	60 [1524		60-1/4" [1 530mm]	46-3/8" 178mn		6-1/2" [1 81mm]	30" [762mm]	3i [762		39-7/16" 35-1/8" [1002	mm X	43,000 - 57, 39,000 - 52,	
Top View						Front View				Left Side View			892mm] Right Side View			
MODEL		B	C	GAS LINE AND CHECTRICAL ACCESS K	E		•		N	, ° ° ° ° ° ° ° ° ° ° ° ° ° ° ° ° ° ° °	N N	Ţ Ļ	GAS ACCE	ESS ACCESS	0	P
WIODEL									0.4 (011 10							
MARQ42STIN	58-1/8" [1 476mm]	42" [1067mm]	39-7/16" [1002mm]	35-1/8" [892mm]	45-3/8" [1 153mm]	60" [25mm]	1" [868mm]	46-3/8" [1 178mm]	9-1/8" [2 32mm]	12" [305mm]	15" [381mm]	12-3/4" [324mm]	8" [203mm]	30" [762mm]	30-3/8" [772mm]	14" [356mm

U.S. Efficiencies

Canada Efficiencies

EnerGuide (CSA P.4.1-02) EnerGuide is the official Government of Canada mark associated with the labelling and rating of

RATING Marquis II 36 Marquis II 42 Marquis II ST 42 56.7% (NG) / 51.9% (LP) 66.7% (NG) / 66.4% (LP) 60.5% (NG) / 63.9% (LP)



Majestic efficient and environmentally-friendly products, please visit

Limited Lifetime Warranty¹

a limited lifetime warranty on the most important aspects of our gas-burning products: firebox and heat exchanger.

Your Majestic Dealer:







MAJ-1019U-0219

Marquis II Series Direct Vent Gas Fireplaces

The Marquis II series gas fireplace fills your home with comfort. Watch the scene unfold with an expansive view of the flames as they wrap around split logs. The authentic masonry appearance and accent lighting enhance the beautiful fire. Come home to the single-sided or see-through Marquis II series gas fireplace, and enjoy the entertainment and romance you deserve.

Marquis II Quick Look


- ClearView[™] glass gives you an expansive view of the flames and realistic split logs
- Showcase the interior with accent lighting
- Customize the interior with up to three choices
- Perfect for medium and larger rooms
- Available in 36" or 42" single-sided models or 42" see-through model
- Up to 57,500 BTUs



Fill your home with comfort.

Heat-Zone™ Technology


Draw heat from your fireplace to another room in your home. Redirect up to 50% of the heat, while reducing wall temperatures above the fireplace.



Move heat where you want it


Heat Duct Technology

Send the warmth from your fireplace to the rest of your home via the furnace ductwork. Redirect up to 50% of the heat, while reducing wall temperatures above the fireplace.

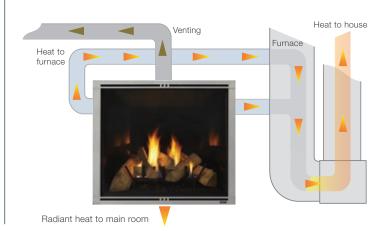

Heat Out Technology


Draw heat from your fireplace and direct it outside. Redirect up to 40% of the heat while reducing wall temperatures above the fireplace.



Install virtually anywhere

Power Venting Technology

Fireplaces aren't just for exterior walls. A fan-powered accessory with slim venting can zigzag throughout your home – up, down, over or under – making it possible to install a gas fireplace virtually anywhere.





Control your comfort

IntelliFire Touch RC400 touchscreen remote



A large LCD screen and simple navigation provide easy operation. Feel confident knowing alerts and notifications will appear when needed. The RC400 acts as a thermostat and can be used as a remote, or docked on the wall.

Features: on/off, flame height adjustment, lights adjustment,

thermostat mode, room temperature readout, child lock, timer mode, automatic battery backup, cold climate mode, power vent, wall docking station. Lights and power vent are dependent on your fireplace.

Accent and ember bed lights



Select your interior panels







Tavern Brown Herringbone (single-sided only)

Tavern Brown



Reflective Black Glass (single-sided only)

Select your front finish



Bronze



Charcoal



Pewter