

Custom Insert Surround Specifications

For Majestic Ruby and Jasper Gas Inserts - CUST-2215 and CUST-SRND-MI

Orders-mtp@hearthnhome.com
Orders-ktz@hearthnhome.com
Orders-sac@hearthnhome.com

Date: _____

Customer Name: _____ Customer Account Number: _____

Contact Name: _____ Contact Email: _____

Contact Phone Number: _____ Contact Fax Number: _____

Full Insert SKU: _____

Full Front SKU: _____

Signature _____

By signing this form I acknowledge that custom surrounds may not be cancelled or changed.

PLEASE CHECK ONLY ONE BOX FROM EACH ROW:

Number of Sides: 3-Sided 4-Sided

Color of Surround: Black Bronze

Surround Style: Square

Please refer to the Custom Insert Surround Matrix on the last page for Min and Max dimensions. All Dimensions are required prior to manufacturing. All measurements provided should be finished dimensions.

Square Surrounds

A: _____


B: _____

C: _____

D: Depth: Metal Inserts: _____ (3/4" to 3")

Quantity: _____

C measurement is only needed when ordering a 4-sided surround – min. 1"

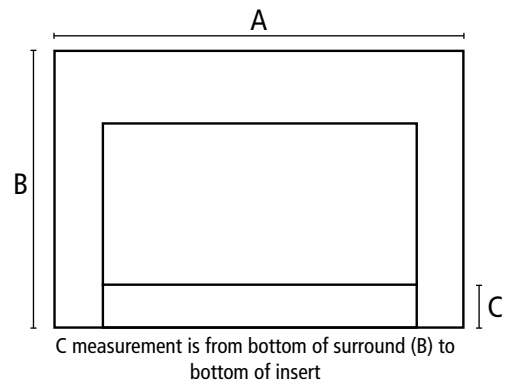

Notes: _____

PURCHASE ORDER #: _____

(If this order requires modification, you will be notified and order entry will be pending upon resubmission approval)

Reminder, all custom surround prices are subject to change.

Custom Insert Surround Matrix

Please note that when ordering a custom surround the requested size must fall within these dimensions. *

Unit	Front Style	Dimensions	Three-Sided	
			Width	Height
RUBY25	CSFI25, CASFI25	Maximum	50"	45"
		Minimum	32"	20-1/8"
	INFIT-25	Maximum	50"	45"
		Minimum	27-3/4"	18-1/4"
RUBY30, JASPER30	CSFI30, CASFI30	Maximum	50"	45"
		Minimum	37"	23-5/8"
	INFIT-30	Maximum	50"	45"
		Minimum	32-3/4"	21-3/4"
RUBY35	CSFI35, CASFI35	Maximum	50"	45"
		Minimum	42"	27-1/8"
	INFIT-35	Maximum	50"	45"
		Minimum	37-3/4"	25-1/4"

Unit	Front Style	Dimensions	Four-Sided	
			Width	Height
RUBY25	CSFI25, CASFI25	Maximum	50"	45"
		Minimum	32"	21-1/8"
	INFIT-25	Maximum	50"	45"
		Minimum	27-3/4"	19-1/4"
RUBY30, JASPER30	CSFI30, CASFI30	Maximum	50"	45"
		Minimum	37"	24-5/8"
	INFIT-30	Maximum	50"	45"
		Minimum	32-3/4"	22-3/4"
RUBY35	CSFI35, CASFI35	Maximum	50"	45"
		Minimum	42"	28-1/8"
	INFIT-35	Maximum	50"	45"
		Minimum	37-3/4"	26-1/4"

Bottom dimension "C" minimum 1" when ordering a 4-sided surround

Increasing the surround depth can decrease the minimum required opening width, allowing installation of larger gas inserts into smaller openings

Unit	Surround Depth	2"	2-1/2"	3"
RUBY 25"	Minimum Opening Width	26"	25-3/4"	25-7/16"
RUBY OR JASPER 30"	Minimum Opening Width	31" **	30-3/4"	30-7/16"
RUBY 35"	Minimum Opening Width	36" **	35-3/4"	35-7/16"

* Subject to approval

** 2" deep surround available as medium surround in black, are stocked in RDCs