


Fan Mist Kit Installation Instructions:

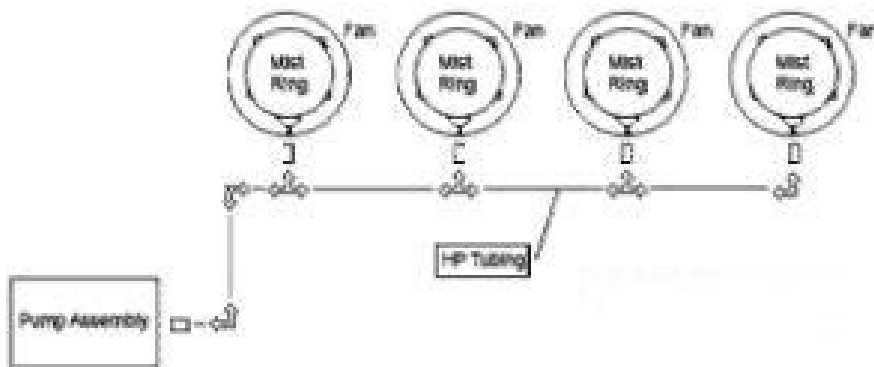

Congratulations! on purchasing our Fan misting system. Please follow these basic steps for trouble free installation.

To Begin, Set the pump in a suitable location that is flat, dry, and close to both a 120 GFI outlet and a water spigot or hose.

Next, attach the garden hose to pump inlet. Turn on water momentarily to remove air bubbles from the filter. Then, Attach 1/4" tubing to outlet of the pump (1/4"). Pump inlet/outlet fittings are push-lock so be sure to press firmly until it snags in place. (See Push Lock Fittings Guide for more details)

The flexible tubing leading from the pump is attached to the left side of the first push/lock 3 way tee. If the tubing needs to be shortened, make a straight cut through the flexible tubing. Cut another short piece and connect it to the Stainless Steel Mist Ring. Extend the flexible line to additional fans as needed.

Mount the mist fans to desired location using hardware provided. Lastly, remove one nozzle head from the last fan and run water to flush out the system.

Helpful Hints:

Insert tubing all the way into push/lock fittings then tug firmly to insure proper connection.

Maintenance:

- Filter should be inspected each month and replaced every 3 months.
- System should be winterized during winter months. Be sure to drain out filter and entire mist line.
- We offer nozzle cleaning solution to clean clogged nozzles.
- Also, use our scale free filters to prevent clogging due to hard water.