



Log Placement Instructions

Models: MOUNTAIN OAK-24/30


⚠WARNING!

The positioning of the logs is critical to the safe, clean operation of this gas log set. Sooting and other problems may result if the logs are not properly positioned per these instructions. Failure to position in accordance with the diagrams below, or failure to use only parts specifically approved for this log set may result in property damage or personal injury.


PLACE MOUNTAIN OAK-24/30 LOG SETS

1. Place Rear Log (#1) on rear support. Figure 1
2. Place Middle Log (#2) on middle support. Figure 2
3. Place Front Log (#3) in between burner and grate. Figure 3
4. Place Top Right Log (#4) in bottom log cutouts. Figure 4
5. Rest Top Left Log (#5) in front and middle log cutouts. Figure 4


NOTE: Logs #1, #2 and #3 have ridges on the bottom which secure the logs to burner frame. After installing each log, check to be sure it is stable.

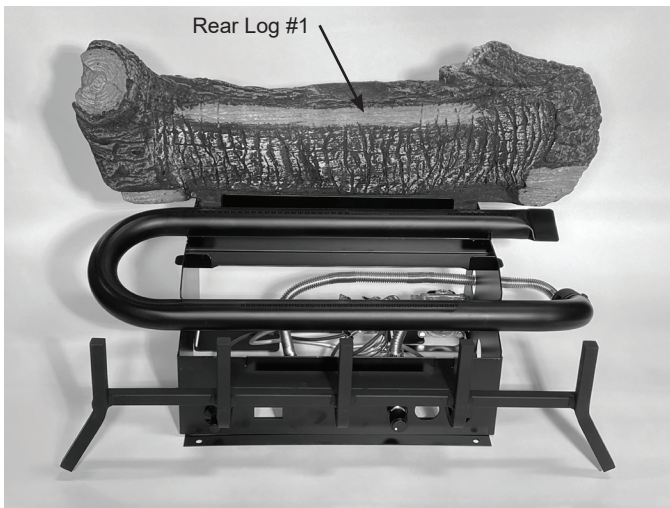


**Figure 1 -
Place Rear Log**

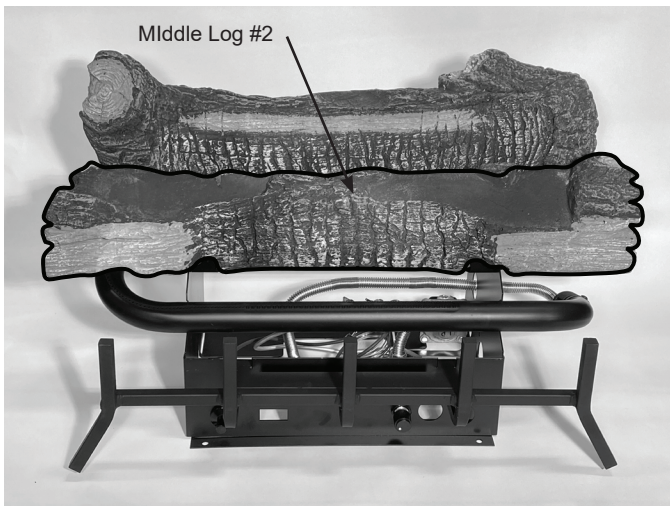

**Figure 2 -
Place Middle Log**

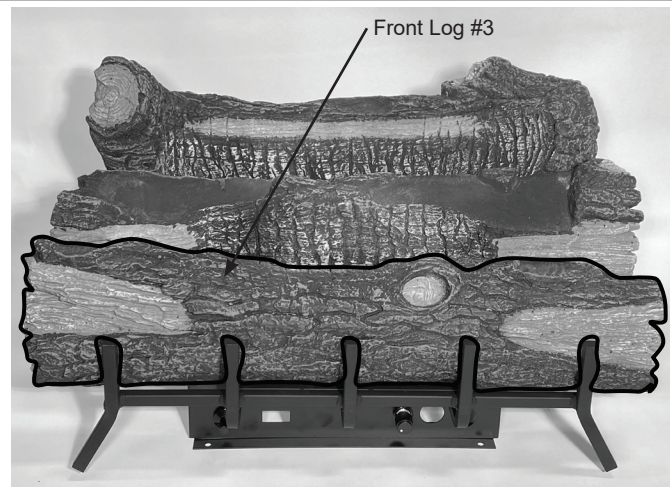

**Figure 3 -
Place Front Log**

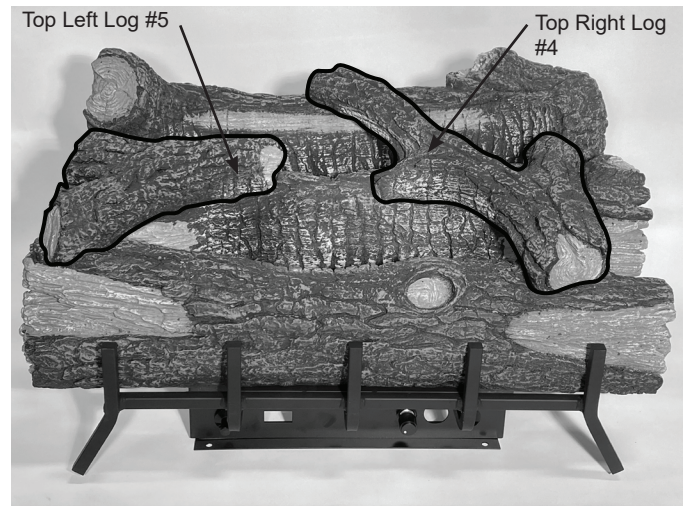

**Figure 4 -
Place Top Right and Left Logs**

PLACE THE DECORATIVE ROCK

WARNING

DO NOT sprinkle volcanic rock on the logs or around the pilot or the main burner. This may cause sooting. Only place volcanic rock on the floor of the fireplace.

During initial operation of the new heater, burning logs will give off a paper burning smell and orange flames will be present. Simply open the windows for a few hours to vent the odor.

Hearth & Home Technologies
7571 215th Street West, Lakeville, MN 50044
www.hearthnhome.com