






J4PG4030A1060BA

TAG: _____

SUBMITTAL

2.5 Ton High-Efficiency Gas Package Unit J4PG4030A1060BA

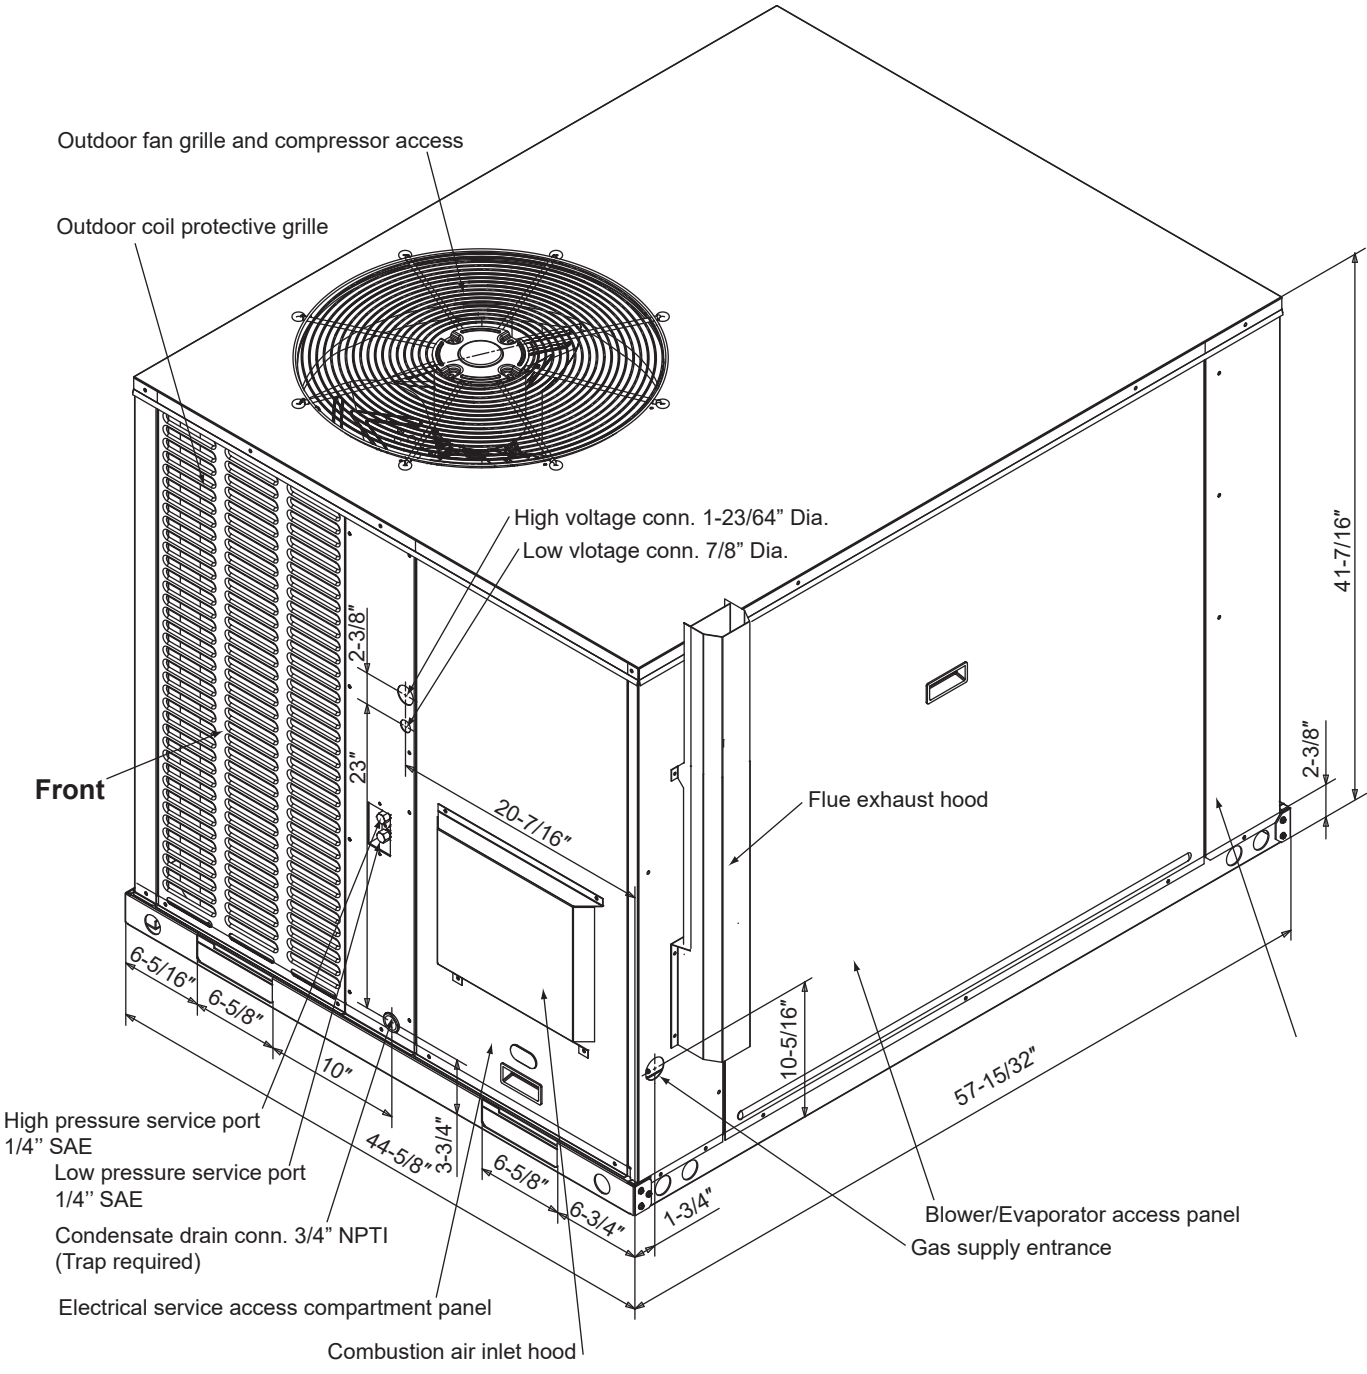

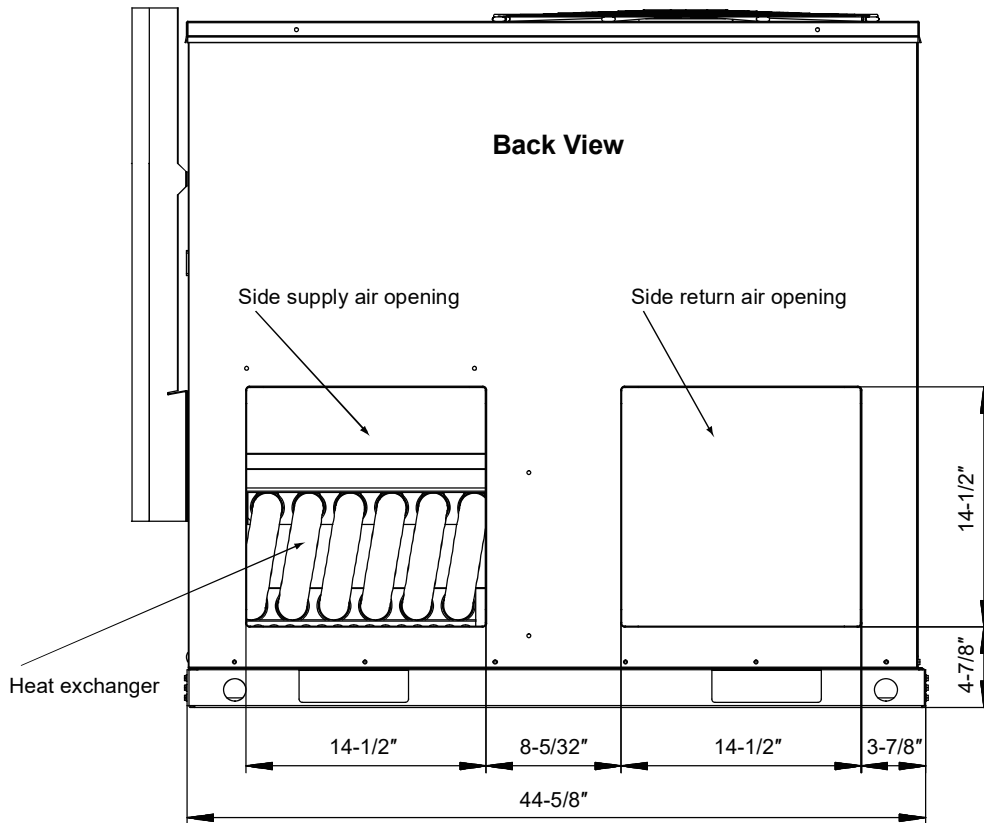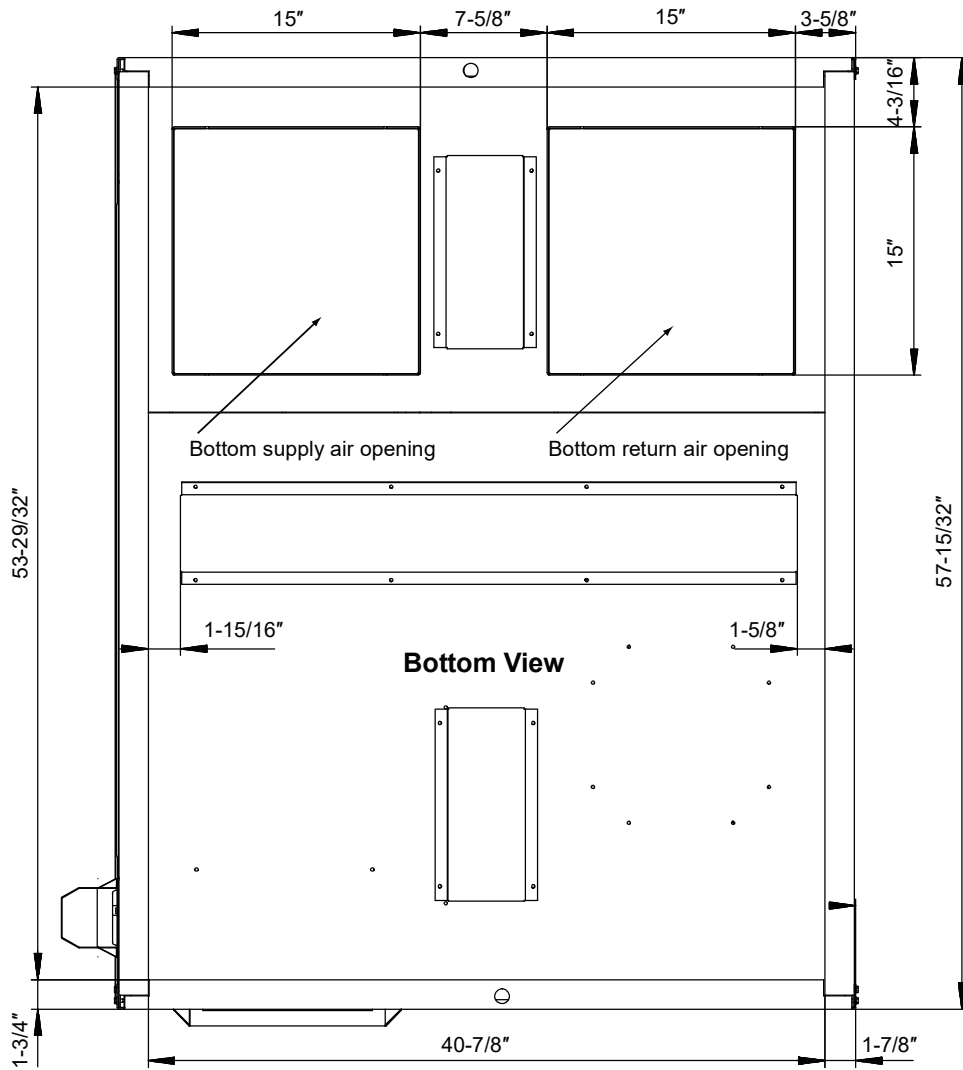

Dimensions Back and Bottom

PRODUCT SPECIFICATIONS

Specifications

MODEL	J4PG4030A1060BA
POWER CONNS. - V/PH/HZ	208/230/1/60
MIN. BRCH. CIR. AMPACITY	15.4
BR. CIR. PROT. RTG. - MAX. (AMPS)	25
SOUND POWER LEVEL[dB(A)]	58
GAS HEATING PERFORMANCE	
HEATING INPUT (Btu)	60,000
HEATING OUTPUT (Btu)	48,600
TEMP. RISE RANGE (°F)	25-55
AFUE (%)	81
GAS CONNS. PIPE SIZE	1/2
COMPRESSOR	ROTARY
NO. USED- NO. SPEEDS	1-1
VOLTS/PH/HZ	208/230/1/60
R.L. AMPS- L.R. AMPS	10.3 - 60
CONDENSER FAN	
DIA. (IN.)	22
TYPE DRIVE- NO. SPEEDS	DIRECT - 1
MOTOR HP	1/6
MOTOR SPEED R.P.M.	845
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	0.94
CONDENSER COIL	Micro-channel
ROWS- F.P.I.	1-/
FACE AREA (SQ. FT.)	17.7
TUBE SIZE (IN.)	/

EVAPORATOR FAN	
DRIVE- NO. SPEEDS	DIRECT - 4
CFM VS. IN. WG.	See Fan Performance Table
MOTOR HP	1/2
MOTOR SPEED R.P.M.	1075
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	2.2
EVAPORATOR COIL	
ROWS- F.P.I.	3 - 14
FACE AREA (SQ. FT.)	6.53
TUBE SIZE (IN.)	3/8
REFRIGERANT CONTROL	ORIFICE
REFRIGERANT	
LBS. - R-410	4 LBS. - 1 OZ.
DIMENSIONS	
CRATED (IN.)	44-5/8X41-7/16X57-7/16
WEIGHT	
SHIPPING (LBS.)	520
NET (LBS.)	500

Fan Performance Table

Motor Speed	AIR FLOW PERFORMANCE									
	J4PG4030A1060BA									
	External Static Pressure-Inches W.C.									
		0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Low	CFM	917	859	806	753	694	-	-	-	-
Middle-Low	CFM	1190	1117	1049	980	910	835	752	-	-
Middle-High	CFM	1306	1226	1153	1083	1005	926	839	738	-
High	CFM	-	1295	1217	1133	1055	974	884	793	689

Features

- Single-stage gas (LP conversion kit provided with each unit) heating.
- Bottom or side air return.
- Aluminized steel tubular heat exchanger.
- Quiet multi-speed circulation blower.
- Direct spark ignition
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.

OXBOX[™]
A TRANE® BRAND



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J4PG4030A1060A-1A