CHARRED RUGGED SPLIT OAK SEE-THRU LOG PLACEMENT INSTRUCTIONS

CAUTION.....WARNING.....IMPORTANT

USE ONLY PETERSON REAL FYRE BURNERS AND VALVES WITH THIS REAL FYRE LOG SET.





CHRSSO-2-30 shown

LOG SET IMPORTANT INFORMATION

This instruction contains recommended log placement for these Real Fyre logs which will promote good combustion and provide superior flame pattern and appearance. Use these logs only with a Peterson burner system.

Adequate ventilation is absolutely necessary! Provided significant, noticeable sooting does not occur, some flexibility is possible in log placement to suit your individual preference (see Important below). If you experience a continued accumulation of black carbon (soot) on your logs it is an indication of incomplete combustion and you should move the effected log(s) so as to minimize the flame contact on the effected log(s). If significant sooting continues, stop using this gas log set.

Please read these instructions completely and carefully.

Important: Adequate ventilation is absolutely necessary. Adequate spacing between the logs is NECESSARY and MUST be maintained. Some carbon build up (sooting) may occur where flames strike the logs. If carbon build up (sooting) continues, rearrange top logs to allow more opening(s) for flame(s) before sooting becomes worse. If any sooting occurs outside of the firebox (i.e. on the walls), turn off unit immediately and contact a qualified professional service technician.

WARNING: Use **ONLY** Peterson Real Fyre <u>burners</u> and valves with this Real Fyre gas log set. Failure to do so may result in property damage or personal injury, and will void listings, certifications, and invalidate claims made to RHP. Contact your local Real Fyre dealer if you need more information.


This product is only warranted when used as part of a Robert H. Peterson Co. vented burner system.

ROBERT H. PETERSON CO. • 14724 East Proctor Avenue • City of Industry, CA 91746

WARNING: Th	is gas log set is for use with R.H. Peterson Co burners
	nd parts) ONLY.
	n hazard! Logs will remain hot for some time after use.
use	ou need to reposition any log to maintain the proper layout, heat resistant gloves or allow logs adequate time to cool fore handling.
situation and in	Peterson burners and valves may result in a DANGEROUS property damage, personal injury or even death; will void rtifications; and will void any insurance coverage by R.H.

Peterson Co or our insurers.


Charred Rugged Split Oak SEE-THRU Log Placement Instructions (18/20"model)

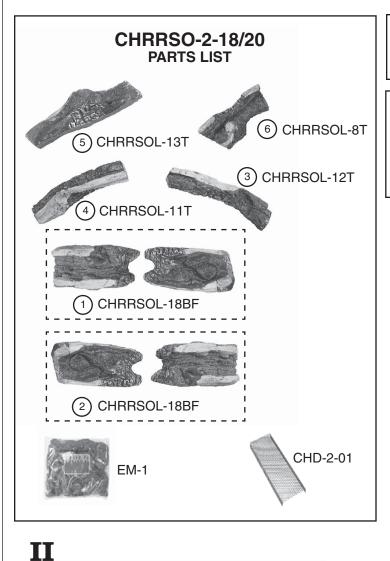



CAUTION: Burn hazard! Logs will remain hot for some time after use.


This charred log set includes an ember screen and glowing embers. For G45-2 Series Burner Systems; DISCARD the screen and embers as they are not applicable. For G4-2 Series Burner Systems; the screen places over the center of the two burners and the embers are placed on the screen.


All items for this log set are included in one (1) box.












Charred Rugged Split Oak SEE-THRU Log Placement Instructions (24" & 30" models)


This charred log set includes an ember screen and glowing embers. <u>For G45-2 Series Burner Systems</u>; <u>DISCARD</u> the screen and embers as they are not applicable. For G4-2 Series Burner Systems; the screen places over the center of the two burners and the embers are placed on the screen.

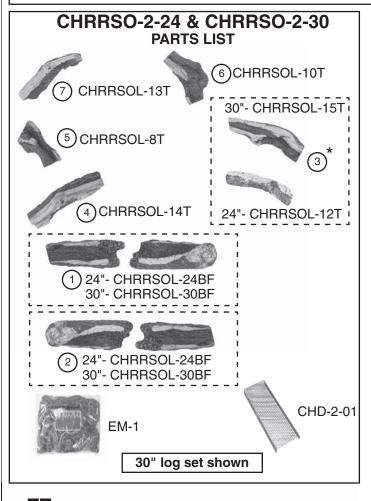


CAUTION: Burn hazard! Logs will remain hot for some time after use.

All items for this log set are included in one (1) box.



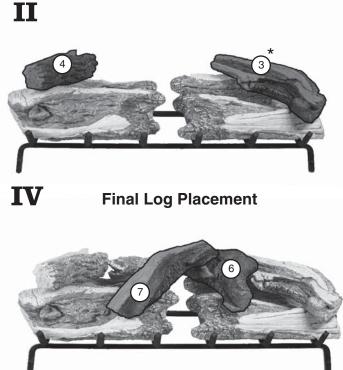

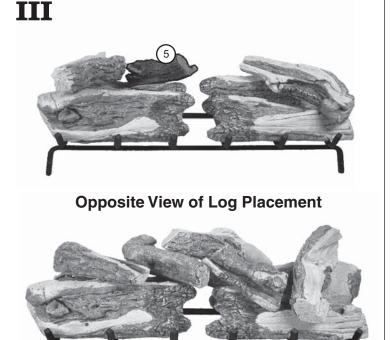

 $^{^{\}star}$ Although this log is slightly shaped differently between 24" and 30" sets; log placement is the same (see ${f II}$).