

The DRL4000 Series linear direct vent gas fireplace offers a sleek modern appearance that is right at home in contemporary and transitional spaces. An expansive ceramic glass opening provides an exceptional view of the gently dancing flames rising through the beautiful reflective black glass floor media. Add the optional heat circulating blower and multi-function remote for the ultimate in comfort and control.



FEATURED DRL4060 shown with see-through kit and black reflective crushed glass

STANDARD FEATURES

- ♠ Available in a 60" linear configured model
- See through conversion kit available to allow viewing from two living spaces
- HeatFlo kit option allows heat to be directed above heat sensitive wall hangings
- Electronic ignition with battery backup provides continued operation in the event of a power outage
- Clean-face design with integrated tile stops for easy finishing
- Ceramic glass for optimum heat transfer and a protective screen*
- ♠ Black painted interior standard with a reflective glass liner option available
- Reflective black crushed glass media included with several optional colors available to customize the look
- Optional blower and hand held multi-function remote control available
- 4 20-year limited warranty





DRL4060 shown with Black Painted Interior and Black Reflective Crushed Glass

INTERIOR

Liner



Black Painted Interior (Standard)



Reflective Black Glass Liner

Media



Reflective Black **Crushed Glass** (Standard)



Copper Crushed Glass



Platinum Crushed Glass



High-Definition Driftwood Log Set



Reflective Blue Crushed Glass



River Rock Assorted Set



Goldfinger **Crushed Glass**

REMOTE

SEE-THROUGH KIT

TRIM



See-Through Kit



Black Perimeter Trim Kit




HEATFLO KIT

Protect heat sensitive televisions, artwork and other decorative wall materials. No blower required, the HeatFlo kit works through natural convection to redirect heat from the fireplace upward through hidden ductwork and out through a sleek horizontal vent. Walls stay cooler and heat flows more evenly through the room for a comfortable fireplace experience.

- TV & Artwork can be placed above the fireplace
- Helps protect heat sensitive wall facing materials
- Improves convective heat circulation in the room
- No electricity or blower required for operation



APPLIANCE SPECIFICATIONS

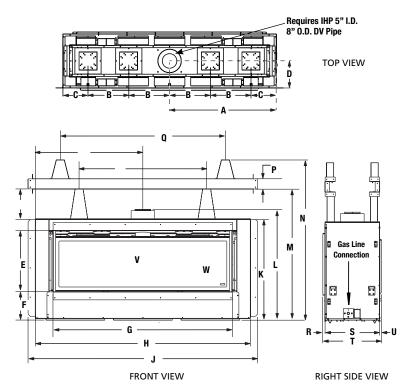

DRL 4060					
Α	36-5/8"	Н	73-1/4"	Q	43-1/2"
В	14"	J	78-1/4"	R	3/4"
С	8-5/8"	K	34-3/8"	S	18-1/2"
D	9-3/8"	L	37-3/4"	Т	19-1/4"
E	20-7/8"	М	44-5/8"	U	5/8"
F	9-3/4"	N	54-5/8"	V	57-1/8"
G	61-1/4"	Р	3-1/2"	W	15-1/2"

• REFER TO INSTALLATION MANUAL FOR ALL REQUIRED CLEARANCES TO COMBUSTIBLES.

FIREPLACE BTU OPERATING RANGE								
MODEL	FUEL	BTU/HR	AFUE	P4				
DRL 4060	NG	47,000	52.2	42.2				
DRL 4060	LP	41,000	52.3	41.9				


IMPORTANT NOTES:


As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance

 ${\bf Diagrams, illustrations\ and\ photographs\ are\ not\ to\ scale---consult\ installation\ instructions.\ Product\ designs,\ materi--$ als, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

FRAMING SPECIFICATIONS

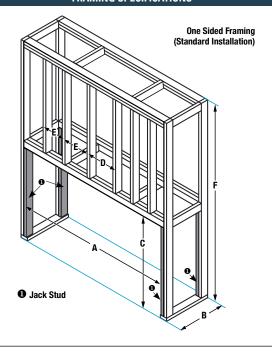



DRL 4060 FRAMING DIMENSIONS

60" Models	А	В	C	D	E	F	*G	Н	J
One Sided Framing	75-1/2"	19-1/2"	54-3/4"	16"	12"	96"	6"	64-14"	7-1/2"
One Sided Framing HeatFlo Kit	75-1/2"	19-1/2"	54-3/4"	16"	12"	96"	6"	64-14"	7-1/2"

- F. Minimum height from appliance base to ceiling
- *G. Minimum Distance from Vent Opening to Ceiling
- REFER TO SPEC SHEET FOR COMPLETE SEE-THROUGH APPLICATIONS AND INSTRUCTIONS.

On the Cover: DRL4060 fireplace with Black Painted Interior and Reflective Black Crushed Glass Media



