


USER INSTRUCTIONS

POWER DATA

	LPM-4416	LPM-5616	LPM-6816	LPM-8016	LPM-9616
Volts/HZ Amps	AC 120V 60Hz 14 Amps Optional AC 240V 60Hz 14 Amps	AC 120V 60Hz 14 Amps Optional AC 240V 60Hz 14 Amps	AC 120V 60Hz 14 Amps Optional AC 240V 60Hz 14 Amps	AC 120V 60Hz 14 Amps Optional AC 240V 60Hz 14 Amps	AC 120V 60Hz 14 Amps Optional AC 240V 60Hz 14 Amps
Heater	AC 120V 1500W Optional AC 240V 3000W	AC 120V 1500W Optional AC 240V 3000W	AC 120V 1500W Optional AC 240V 3000W	AC 120V 1500W Optional AC 240V 3000W	AC 120V 1500W Optional AC 240V 3000W
Lamps	LED 12V	LED 12V	LED 12V	LED 12V	LED 12V
Rotor Motor	AC120V/60Hz 40mA 3.7W AC100V/50Hz 40mA 3.0W 18/15RPM CCW	AC120V/60Hz 40mA 3.7W AC100V/50Hz 40mA 3.0W 18/15RPM CCW	AC120V/60Hz 40mA 3.7W AC100V/50Hz 40mA 3.0W 18/15RPM CCW	AC120V/60Hz 40mA 3.7W AC100V/50Hz 40mA 3.0W 18/15RPM CCW	AC120V/60Hz 40mA 3.7W AC100V/50Hz 40mA 3.0W 18/15RPM CCW
Shipping Size	46" x 27" x 13 1/2"	58" x 27" x 13 1/2"	70" x 27" x 13 1/2"	82" x 27" x 13 1/2"	98" x 27" x 13 1/2"

PRODUCT GUIDE

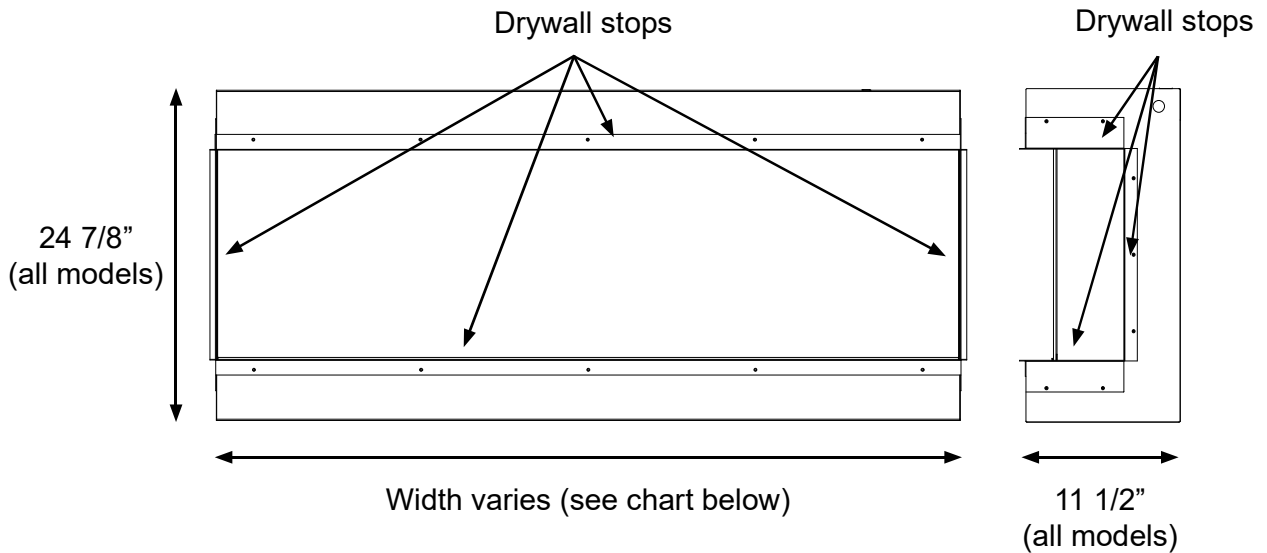

Model	Viewing Area	Firebox Dimensions	Framing Dimensions
LPM-4416	42" W x 15 1/2" H	44" W x 24 7/8" H x 11 1/2" D	44 1/4" W x 25 1/4" H x 12" D
LPM-5616	54" W x 15 1/2" H	56" W x 24 7/8" H x 11 1/2" D	56 1/4" W x 25 1/4" H x 12" D
LPM-6816	66" W x 15 1/2" H	68" W x 24 7/8" H x 11 1/2" D	68 1/4" W x 25 1/4" H x 12" D
LPM-8016	78" W x 15 1/2" H	80" W x 24 7/8" H x 11 1/2" D	80 1/4" W x 25 1/4" H x 12" D
LPM-9616	94" W x 15 1/2" H	96" W x 24 7/8" H x 11 1/2" D	96 1/4" W x 25 1/4" H x 12" D