

A romantic night scene featuring a couple sitting close together by a large, glowing fire pit. The fire is bright and lively. In the foreground, two wine glasses filled with red wine sit on a dark surface. The background is dark, suggesting an outdoor setting at night.

COMMERCIAL
AND RESIDENTIAL
OUTDOOR PRODUCTS



Hearth Products Controls
Fire Inspired Since 1975

OUTDOOR PRODUCTS CATALOG

FIRE • WATER • FIRE AND WATER

2018-2019

HPC FIRE PIT CONTROLS *Explained*



THE NEXT 3 PAGES WILL HELP DECIDE...

- How to light the fire pit?
- Does the fire pit need flame sensing?

HPC OFFERS THREE FLAME CONTROL OPTIONS FOR OUR CERTIFIED FIRE PIT INSERTS- ALL OF WHICH OFFER OPTIONS THAT BEST FIT YOUR NEEDS.



①

Remote Electronic Ignition (EI Series)
(Pg. 8)



②

Push Button / Flame Sense (FPPK Series)
(Pg. 9)



③

Match Lit System (MLFPK Series)
(Pg. 10)




Photo Courtesy of Weavers



Need help? Use our fire pit selector at hpcfire.com

① REMOTE ELECTRONIC IGNITION CONTROL (EI SERIES)

This is our top-of-the-line system featuring the ignition ease with use of a wall switch or handheld remote to control flame as well as auto-relight if flame loss. This year we are launching a new control system with numerous convenience and performance improvements for both On/Off Models and our newly introduced High/Low Models- such as High/Low flame control via our new remote, a redesigned hot surface igniter and many other improvements.

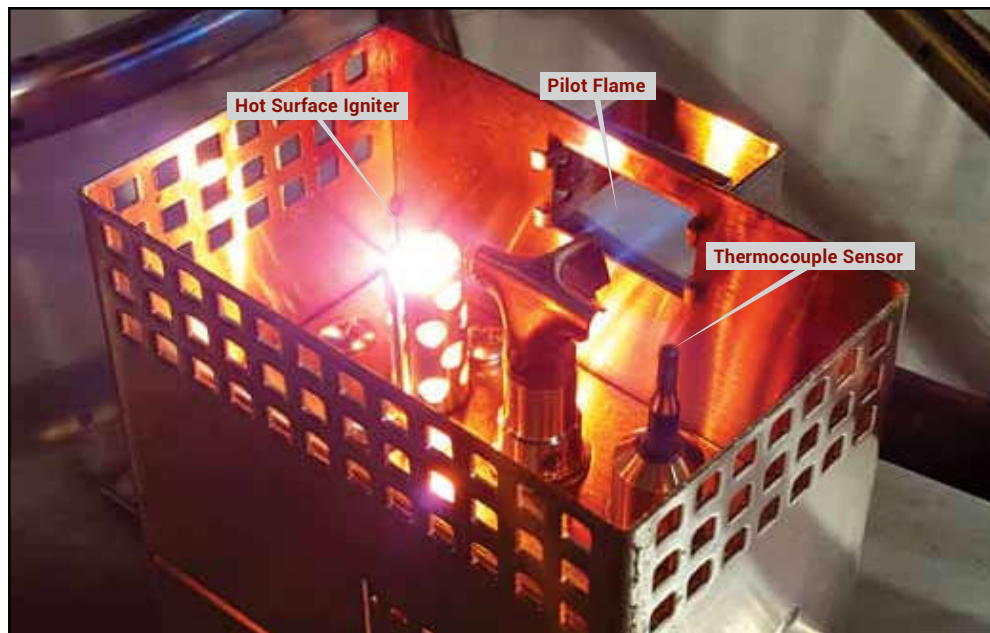

Igniter / Sensor are protected from outdoor elements in the blowout box



Smart device App available on Hi/Lo Models only

How It Works

Start Up: This is done by use of a wall switch or remote control. When the ON command is received, the system completes initial safety checks then starts flow of pilot gas. After 5 seconds the hot surface igniter glows igniting pilot flame. When the system confirms pilot flame present, the main burner gas will flow ignited by the pilot flame.

Operation: While enjoying the ambiance of your fire pit, the system is at work monitoring flame status, internal temperatures / voltages and other safety parameters. If flame loss does occur, the system will turn off all gas flow, and then restart by automatically commencing Start sequence.

On/Off Models: Includes the convenience and safety features- optional remote control available.

High / Low Flame Control Models: This option includes a smart remote and App via smart device control with 2-way communication with the fire pit. Remote allows flame height control while receiving information from fire pit to advise user of fire pit status (flashing LED).


Shut Down: To turn OFF the fire pit simply use wall switch, remote control or whole house system.

Features

- Fully Assembled- ready to install. Control components are protected within valve box.
- Start via wall switch or remote control; Auto re-light if flame is lost.
- Ignition is complete using a robust and reliable Hot Surface igniter.
- On/Off models: Use with optional wall switch, Remote Control or your whole house system
- High/Low Flame Control Models: Adjust high setting to low setting- ~45% turndown (Remote Control included). Not for use with your whole house system.
- 120vac: Standard outdoor grounded power cord- simply plug into GFCI outlet.
- 24vac Option: Typically used with lower voltage requirements.
- Natural Gas or Liquid Propane: Factory built & tested for either fuel.
- Internal temperature monitoring with overheat auto shutoff.
- CSA Certified in US & Canada to ANSI Z21.97-2014 / CSA 2.41-2014 requirements. (This new EI system already meets upcoming 2020 ANSI requirements).
- Optional Controls: On/Off Remote, Timers, Power Supplies and an Emergency Shutoff. (Pg. 28)

② PUSH BUTTON / FLAME SENSE CONTROL (FPPK SERIES)

This is our mid-range fire pit insert utilizing safety pilot flame control- simply push ignition button and valve control knob to start... flame adjustment is done with knob. This battery operated system is a good solution for flame sensing necessity without AC power requirements.

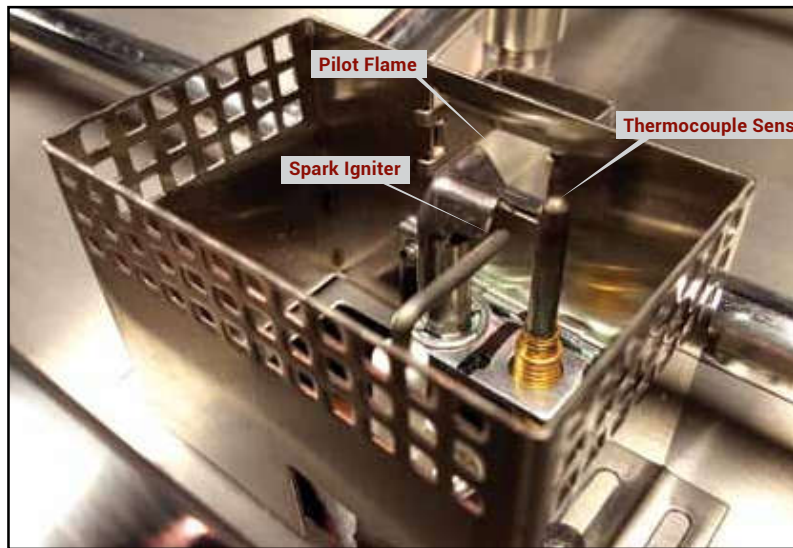

How It Works

Start Up: This is done by simultaneously pressing valve control knob to start flow of pilot gas and pressing ignition button for spark. Release spark after pilot ignition, release valve control knob after ~20 seconds. Then turn valve control knob counterclockwise to light main burner.

Operation: Flame height may be adjusted by turning valve control knob- counterclockwise provides more flame, clockwise lowers flame. If flame loss does occur, the system will automatically turn off all gas flow.

Shut Down: To turn OFF the fire pit simply turn valve control knob clockwise- slightly depress knob to reach OFF position.

Features

- Fully Assembled and ready to install. Control components are protected within valve box.
- Flex Line configuration provides versatile and simple installation.
- Start ignition with push button and valve control knob.
- Flame sensing- system will turn off gas if flame is lost.
- Flame height is adjustable using valve control knob.
- Battery Operated System- is perfect solution for installs with no power.
- Natural Gas or Liquid Propane: Factory built & tested for either fuel.
- CSA Certified in US & Canada to ANSI Z21.97-2014 / CSA 2.41-2014 requirements.
- Optional Install: Control Box Sleeve for mounting in pavers, metal and more. (Pg. 29)

③ MATCH LIT (MLFPK SERIES)

This is our simplest certified fire pit insert- easy to operate and requires the least amount of maintenance.



30" X 12" Match Lit
(MLFPK-FLEX)



MLFPK Paver Bracket - Pg. 29
(Optional)



Flex Line - Whistle Free

Mounting Bracket

How It Works

Start Up: This is done by lighting long-stem lighter next to perimeter of burner then slowly open key to valve. Leave key in valve during use.

Operation: Flame height may be adjusted by turning key to valve- counterclockwise provides more flame, clockwise lowers flame.

Shut Down: To turn OFF the fire pit simply turn key to valve clockwise to OFF position. Remove key.

Features

- Fully Assembled and ready to install.
- Flex Line configuration provides versatile and simple installation.
- Valve mounting bracket included- for safe mounting of control have.
- Flame height is adjustable using key valve.
- Natural Gas or Liquid Propane: Factory built & tested for either fuel.
- CSA Certified in US & Canada to ANSI Z21.97-2014 / CSA 2.41-2014 requirements.
- Optional Install & Controls: Paver Block Bracket, Key Extension Kit, and Long Keys.

WHY CHOOSE A PENTA BURNER

OVER OTHER RINGS & BURNERS?

HPC has been the leader in fire ring and burner technology since 2003- launching numerous innovative designs including linear trough, dual burner and our original gas fire ring.



In 2012, HPC introduced the Penta Burner- a very unique and innovative burner design that delivers a very full campfire effect...much more evident than any other burner or fire ring on the market. This is accomplished by the 12 & 3 o'clock burner ports on each lobe of the burner (except on the lobe tips) by design to reduce risk of excessive heat exposure to enclosure cap. This port design also prevents a distinct burner pattern when on lower flame setting- unlike many fire rings or burners.

The Penta Burner design requires less fuel to deliver the same flame height versus other fire rings resulting in lower cost to operate. The Penta Burner has received multiple Utility and

Design Patents highlighting the innovation, technology and unique appearance behind the design.

Features

- Made of #304 Stainless Steel with a 5 year warranty.
- Raised-hub design prevents water from entering gas valve.
- Burner ports drilled at 12 & 3 o'clock positions for full flame.
- No distinct burner pattern at low setting.
- Low profile design requires less lava, glass or other media.
- Full range of sizes- from 12" to 48" available.
- Patented Technology- Utility and Design Patents Apply



SPIDER GUARD

SAFETY AND PROTECTION FROM HPC

It is a known fact that spiders are very attracted to LP gas. Over the years we occasionally see a clogged air mixer / orifice due to a spider nest, resulting in a gas leak out the venturi and filling the fire pit cavity. To prevent this, all certified LP fire pits will utilize a "spider guard" to prevent this potentially serious situation.



ROUND INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES

ROUND BOWL INSERTS

An HPC original- this stainless steel, spun bowl design was launched in 2004...and today is still our most popular pan style.

Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:

Made of #304, 18 gauge Stainless Steel
Spun design adds rigidity
Welded gas fitting for strength
Weep holes for drainage

EI MODELS INCLUDE:

Insert: Fully Assembled

Flex Line: Gas Input


Instructions



Penta 31" Electronic Ignition (EI)



24VAC MODELS REQUIRE HPC/SEBCO
24vac, 100W Power Supply pg. 28



Accessories (Pg. 28):

Timers
Power Supplies
E-Stop



SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67




**See Pg. 8 for
EI System Features**

Electronic Ignition Models - EI Series Specifications

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|-----------|--------|----------------|----------------------|---|-----------|---------|
| | | | | HI/LO MODELS COME WITH REMOTE (this column only) | | |
| 13" | 120vac | Natural Gas | 13SSEI-NG/120VAC | 13SSEI-HI/LO-NG/120VAC | 12" Round | 90k |
| | | Liquid Propane | 13SSEI-LP/120VAC | 13SSEI-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | 13SSEI-NG/24VAC | 13SSEI-HI/LO-NG/24VAC | | |
| | | Liquid Propane | 13SSEI-LP/24VAC | 13SSEI-HI/LO-LP/24VAC | | |
| 19" | 120vac | Natural Gas | PENTA19EI-NG/120VAC | PENTA19EI-HI/LO-NG/120VAC | 12" Penta | 65k |
| | | Liquid Propane | PENTA19EI-LP/120VAC | PENTA19EI-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | PENTA19EI-NG/24VAC | PENTA19EI-HI/LO-NG/24VAC | | |
| | | Liquid Propane | PENTA19EI-LP/24VAC | PENTA19EI-HI/LO-LP/24VAC | | |
| 25" | 120vac | Natural Gas | PENTA25EI-NG/120VAC | PENTA25EI-HI/LO-NG/120VAC | 18" Penta | 125k |
| | | Liquid Propane | PENTA25EI-LP/120VAC | PENTA25EI-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | PENTA25EI-NG/24VAC | PENTA25EI-HI/LO-NG/24VAC | | |
| | | Liquid Propane | PENTA25EI-LP/24VAC | PENTA25EI-HI/LO-LP/24VAC | | |
| 31" | 120vac | Natural Gas | PENTA31EI-NG/120VAC | PENTA31EI-HI/LO-NG/120VAC | 24" Penta | 200k |
| | | Liquid Propane | PENTA31EI-LP/120VAC | PENTA31EI-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | PENTA31EI-NG/24VAC | PENTA31EI-HI/LO-NG/24VAC | | |
| | | Liquid Propane | PENTA31EI-LP/24VAC | PENTA31EI-HI/LO-LP/24VAC | | |
| 37" | 120vac | Natural Gas | PENTA37EI-NG/120VAC | PENTA37EI-HI/LO-NG/120VAC | 30" Penta | 250k |
| | | Liquid Propane | PENTA37EI-LP/120VAC | PENTA37EI-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | PENTA37EI-NG/24VAC | PENTA37EI-HI/LO-NG/24VAC | | |
| | | Liquid Propane | PENTA37EI-LP/24VAC | PENTA37EI-HI/LO-LP/24VAC | | |
| 43" | 120vac | Natural Gas | PENTA43EI-NG/120VAC | N/A | 36" Penta | 400k |
| | | Liquid Propane | PENTA43EI-LP/120VAC | N/A | | |
| * 24vac | | Natural Gas | PENTA43EI-NG/24VAC | N/A | | |
| | | Liquid Propane | PENTA43EI-LP/24VAC | N/A | | |

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

**Match proper accessories to your
fire pit model - see Pg. 67-70.**

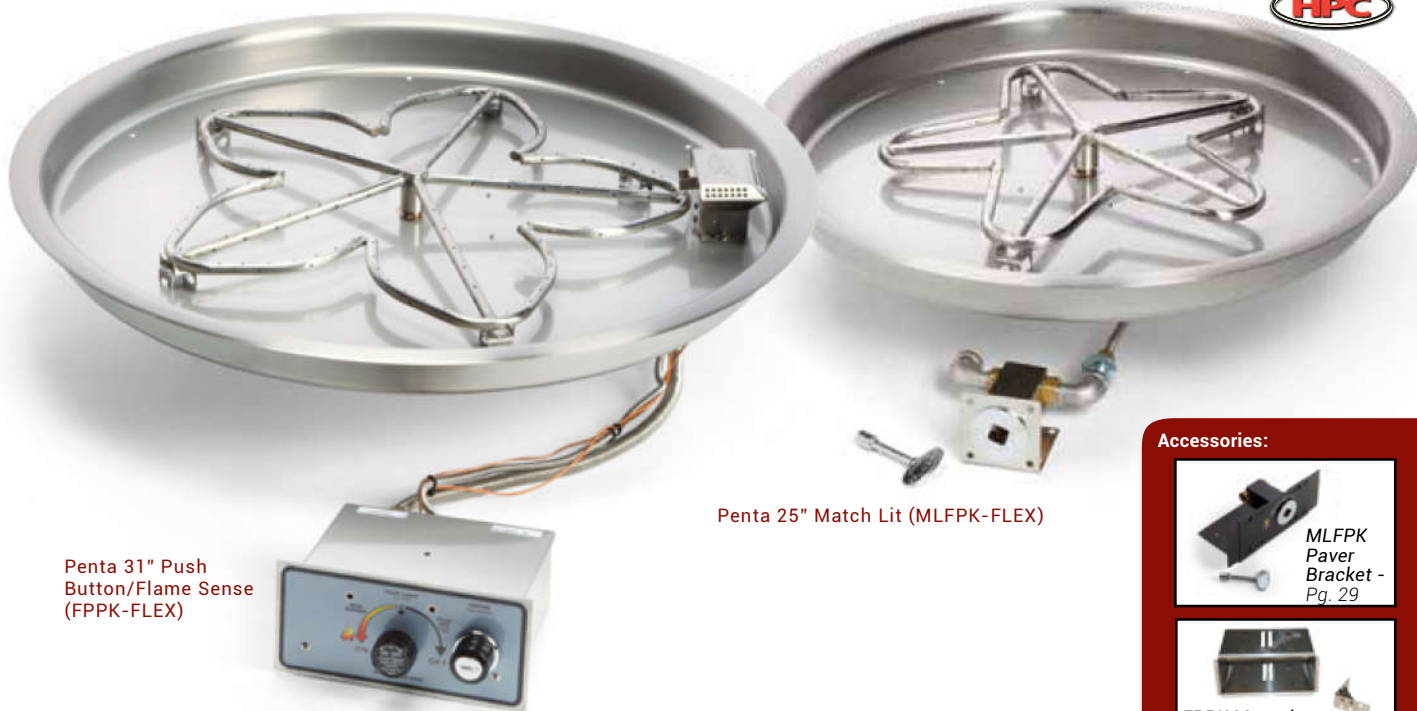

Penta 31" Push Button/Flame Sense (FPPK-FLEX)

Penta 25" Match Lit (MLFPK-FLEX)



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
Vinyl Cover: See Chart on Pg. 69
Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled Instructions

Accessories:



Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size (A") | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|-----------|-------------------------------|--|-------------------------|-----------|---------|-------------|
| 13" | Natural Gas Liquid Propane | FPPK13-FLEX-NG FPPK13-FLEX-LP | FPPK13-FLEX-LP-ST | 12" Round | 90k | 36" |
| 19" | Natural Gas Liquid Propane | PENTA19FPPK-FLEX-NG PENTA19FPPK-FLEX-LP | PENTA19FPPK-FLEX-LP-ST | 12" Penta | 65k | 36" |
| 25" | Natural Gas Liquid Propane | PENTA25FPPK-FLEX-NG PENTA25FPPK-FLEX-LP | PENTA25FPPK-FLEX-LP-ST | 18" Penta | 90k | 36" |
| 31" | Natural Gas Liquid Propane | PENTA31FPPK-FLEX-NG PENTA31FPPK-FLEX-LP | | 24" Penta | 140k | 36" |
| 37" | Natural Gas Liquid Propane | PENTA37FPPK-FLEX-NG PENTA37FPPK-FLEX-LP | | 30" Penta | 140k | 36" |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
Vinyl Cover: See Chart on Pg. 70
Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size (A") | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|-----------|-------------------------------|--|--------------------------|-----------|---------|-------------|
| 13" | Natural Gas Liquid Propane | PENTA13 MLFPK-FLEX-NG PENTA13 MLFPK-FLEX-LP | PENTA13 MLFPK-FLEX-LP-ST | 12" Penta | 65k | 36" |
| 19" | Natural Gas Liquid Propane | PENTA19 MLFPK-FLEX-NG PENTA19 MLFPK-FLEX-LP | PENTA19 MLFPK-FLEX-LP-ST | 12" Penta | 65k | 36" |
| 25" | Natural Gas Liquid Propane | PENTA25 MLFPK-FLEX-NG PENTA25 MLFPK-FLEX-LP | PENTA25 MLFPK-FLEX-LP-ST | 18" Penta | 65k | 36" |
| 31" | Natural Gas Liquid Propane | PENTA31 MLFPK-FLEX-NG PENTA31 MLFPK-FLEX-LP | PENTA31 MLFPK-FLEX-LP-ST | 18" Penta | 65k | 36" |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



Need help? Use our fire pit selector at hpcfire.com

ROUND INSERT MODELS (CONTINUED)

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.



MAP
APPLIES

ROUND FLAT INSERTS

Benefits: Economical flat design- used in enclosures that have recess mount and internal sidewalls for media.

Features:

Made of #304, 18 gauge Stainless Steel
Raised hub burner for water prevention
Welded gas fitting for strength
Weep holes for drainage

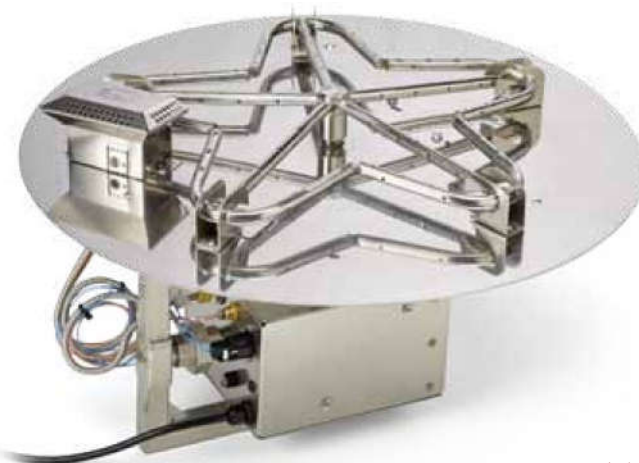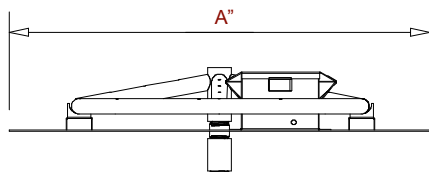

Penta 24" Electronic Ignition (EI)

EI MODELS INCLUDE:

Insert: Fully Assembled
Flex Line: Gas Input
Instructions



24VAC MODELS REQUIRE HPC/SEBCO
24vac, 100W Power Supply pg. 28

Accessories (Pg. 28):

Timers
Power Supplies
E-Stop



SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67




Electronic Ignition Models - EI Series Specifications

See Pg. 8 for EI System Features

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|---|---------|----------------|----------------------|----------------------------------|-----------|---------|
| HI/LO MODELS COME WITH REMOTE (this column only) | | | | | | |
| 14" | 120vac | Natural Gas | 14FSSEI-NG/120VAC | 14FSSEI-HI/LO-NG/120VAC | 12" Round | 90k |
| | * 24vac | Liquid Propane | 14FSSEI-LP/120VAC | 14FSSEI-HI/LO-LP/120VAC | | |
| 18" | 120vac | Natural Gas | PENTA18EI-NG/120VAC | PENTA18EI-HI/LO-NG/120VAC | 12" Penta | 65k |
| | * 24vac | Liquid Propane | PENTA18EI-LP/120VAC | PENTA18EI-HI/LO-LP/120VAC | | |
| 24" | 120vac | Natural Gas | PENTA24EI-NG/120VAC | PENTA24EI-HI/LO-NG/120VAC | 18" Penta | 125k |
| | * 24vac | Liquid Propane | PENTA24EI-LP/120VAC | PENTA24EI-HI/LO-LP/120VAC | | |
| 30" | 120vac | Natural Gas | PENTA30EI-NG/120VAC | PENTA30EI-HI/LO-NG/120VAC | 24" Penta | 200k |
| | * 24vac | Liquid Propane | PENTA30EI-LP/120VAC | PENTA30EI-HI/LO-LP/120VAC | | |
| 36" | 120vac | Natural Gas | PENTA36EI-NG/120VAC | PENTA36EI-HI/LO-NG/120VAC | 30" Penta | 250k |
| | * 24vac | Liquid Propane | PENTA36EI-LP/120VAC | PENTA36EI-HI/LO-LP/120VAC | | |
| 42" | 120vac | Natural Gas | PENTA42EI-NG/120VAC | N/A | 36" Penta | 400k |
| | * 24vac | Liquid Propane | PENTA42EI-LP/120VAC | N/A | | |
| 54" | 120vac | Natural Gas | PENTA54EI-NG/120VAC | N/A | 48" Penta | 400k |
| | * 24vac | Liquid Propane | PENTA54EI-LP/120VAC | N/A | | |

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.

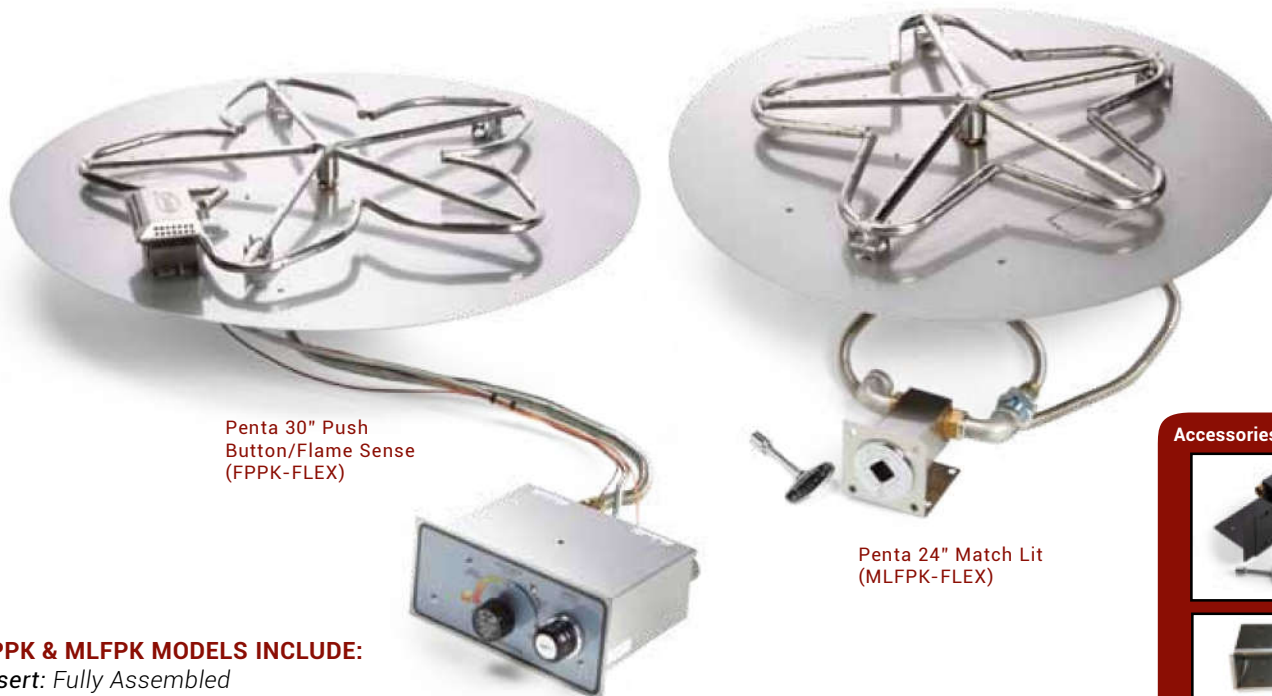

Penta 30" Push Button/Flame Sense (FPPK-FLEX)

Penta 24" Match Lit (MLFPK-FLEX)

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled Instructions



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models

Vinyl Cover: See Chart on Pg. 69

Lava Rock / Glass: See Chart on Pg. 69

Accessories:



MLFPK Paver Bracket - Pg. 29



FPPK Mounting Sleeve - Pg. 29

Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|---------------------|-------------------------|-----------|---------|-------------|
| 14" | Natural Gas | FPPK14-FLEX-NG | | 12" Round | 90k | 36" |
| | Liquid Propane | FPPK14-FLEX-LP | FPPK14-FLEX-LP-ST | | | |
| 18" | Natural Gas | PENTA18FPPK-FLEX-NG | | 12" Penta | 65k | 36" |
| | Liquid Propane | PENTA18FPPK-FLEX-LP | PENTA18FPPK-FLEX-LP-ST | | | |
| 24" | Natural Gas | PENTA24FPPK-FLEX-NG | | 18" Penta | 90k | 36" |
| | Liquid Propane | PENTA24FPPK-FLEX-LP | PENTA24FPPK-FLEX-LP-ST | | | |
| 30" | Natural Gas | PENTA30FPPK-FLEX-NG | | 24" Penta | 140k | 36" |
| | Liquid Propane | PENTA30FPPK-FLEX-LP | | | | |
| 36" | Natural Gas | PENTA36FPPK-FLEX-NG | | 30" Penta | 140k | 36" |
| | Liquid Propane | PENTA36FPPK-FLEX-LP | | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models

Vinyl Cover: See Chart on Pg. 70

Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|-----------------------|--------------------------|-----------|---------|-------------|
| 8" | Natural Gas | MLFPK8-FLEX-NG | | 6" Round | 40k | 36" |
| | Liquid Propane | MLFPK8-FLEX-LP | MLFPK8-FLEX-LP-ST | | | |
| 14" | Natural Gas | PENTA14 MLFPK-FLEX-NG | | 12" Penta | 65k | 36" |
| | Liquid Propane | PENTA14 MLFPK-FLEX-LP | PENTA14 MLFPK-FLEX-LP-ST | | | |
| 18" | Natural Gas | PENTA18 MLFPK-FLEX-NG | | 12" Penta | 65k | 36" |
| | Liquid Propane | PENTA18 MLFPK-FLEX-LP | PENTA18 MLFPK-FLEX-LP-ST | | | |
| 24" | Natural Gas | PENTA24 MLFPK-FLEX-NG | | 18" Penta | 65k | 36" |
| | Liquid Propane | PENTA24 MLFPK-FLEX-LP | PENTA24 MLFPK-FLEX-LP-ST | | | |
| 30" | Natural Gas | PENTA30 MLFPK-FLEX-NG | | 18" Penta | 65k | 36" |
| | Liquid Propane | PENTA30 MLFPK-FLEX-LP | PENTA30 MLFPK-FLEX-LP-ST | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



Need help? Use our fire pit selector at hpcfire.com

SQUARE INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES

SQUARE BOWL INSERTS

Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box...


Features:

Made of #304, 18 gauge Stainless Steel
Raised hub burner for water prevention
Welded gas fitting for strength
Weep holes for drainage

36" Square Electronic Ignition (EI)



Available
May 2018



**24VAC MODELS
REQUIRE HPC/SEBCO**
24vac, 100W Power
Supply pg. 28

EI MODELS INCLUDE:
Insert: Fully Assembled
Flex Line: Gas Input
Instructions

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67



**See Pg. 8 for
EI System Features**

Electronic Ignition Models - EI Series Specifications

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|---|---------|----------------|-----------------------|----------------------------------|-----------|---------|
| HI/LO MODELS COME WITH REMOTE (this column only) | | | | | | |
| 18" | 120vac | Natural Gas | 18SSEI-SQBL-NG/120VAC | 18SSEI-SQBL-HI/LO-NG/120VAC | 12" Penta | 65k |
| | * 24vac | Liquid Propane | 18SSEI-SQBL-LP/120VAC | 18SSEI-SQBL-HI/LO-LP/120VAC | | |
| 24" | 120vac | Natural Gas | 24SSEI-SQBL-NG/120VAC | 24SSEI-SQBL-HI/LO-NG/120VAC | 18" Penta | 125k |
| | * 24vac | Liquid Propane | 24SSEI-SQBL-LP/120VAC | 24SSEI-SQBL-HI/LO-LP/120VAC | | |
| 30" | 120vac | Natural Gas | 30SSEI-SQBL-NG/120VAC | 30SSEI-SQBL-HI/LO-NG/120VAC | 24" Penta | 200k |
| | * 24vac | Liquid Propane | 30SSEI-SQBL-LP/120VAC | 30SSEI-SQBL-HI/LO-LP/120VAC | | |
| 36" | 120vac | Natural Gas | 36SSEI-SQBL-NG/120VAC | 36SSEI-SQBL-HI/LO-NG/120VAC | 30" Penta | 250k |
| | * 24vac | Liquid Propane | 36SSEI-SQBL-LP/120VAC | 36SSEI-SQBL-HI/LO-LP/120VAC | | |
| 42" | 120vac | Natural Gas | 42SSEI-SQBL-NG/120VAC | N/A | 36" Penta | 400k |
| | * 24vac | Liquid Propane | 42SSEI-SQBL-LP/120VAC | N/A | | |

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

**Match proper accessories to your
fire pit model - see Pg. 67-70.**

Available
May 2018

36" Square Push
Button/Flame Sense
(FPPK-FLEX)



36" Square Match Lit
(MLFPK-FLEX)



FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled
Instructions



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models

Vinyl Cover: See Chart on Pg. 69

Lava Rock / Glass: See Chart on Pg. 69

Accessories:



Media
Outdoor Logs
Hard Covers

Pg. 48
Pg. 50
Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|---------------------|-------------------------|-----------|---------|-------------|
| 18" | Natural Gas | FPPK18-SQBL-FLEX-NG | | 12" Penta | 65k | 36" |
| | Liquid Propane | FPPK18-SQBL-FLEX-LP | FPPK18-SQBL-FLEX-LP-ST | | | |
| 24" | Natural Gas | FPPK24-SQBL-FLEX-NG | | 18" Penta | 90k | 36" |
| | Liquid Propane | FPPK24-SQBL-FLEX-LP | FPPK24-SQBL-FLEX-LP-ST | | | |
| 30" | Natural Gas | FPPK30-SQBL-FLEX-NG | | 24" Penta | 140k | 36" |
| | Liquid Propane | FPPK30-SQBL-FLEX-LP | | | | |
| 36" | Natural Gas | FPPK36-SQBL-FLEX-NG | | 30" Penta | 140k | 36" |
| | Liquid Propane | FPPK36-SQBL-FLEX-LP | | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models

Vinyl Cover: See Chart on Pg. 70

Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|---------------------|-------------------------|-----------|---------|-------------|
| 18" | Natural Gas | MLFPK18SQBL-FLEX-NG | | 12" Penta | 65k | 36" |
| | Liquid Propane | MLFPK18SQBL-FLEX-LP | MLFPK18SQBL-FLEX-LP-ST | | | |
| 24" | Natural Gas | MLFPK24SQBL-FLEX-NG | | 18" Penta | 65k | 36" |
| | Liquid Propane | MLFPK24SQBL-FLEX-LP | MLFPK24SQBL-FLEX-LP-ST | | | |
| 30" | Natural Gas | MLFPK30SQBL-FLEX-NG | | 18" Penta | 65k | 36" |
| | Liquid Propane | MLFPK30SQBL-FLEX-LP | MLFPK30SQBL-FLEX-LP-ST | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



Need help? Use our fire pit selector at hpcfire.com

SQUARE INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES


SQUARE FLAT INSERTS

Benefits: Economical flat, square design- used in enclosures that have recess mount and internal sidewalls for media..

Features:

Made of #304, 18 gauge Stainless Steel
Raised hub burner for water prevention
Welded gas fitting for strength
Weep holes for drainage

24" Square Electronic Ignition (EI)

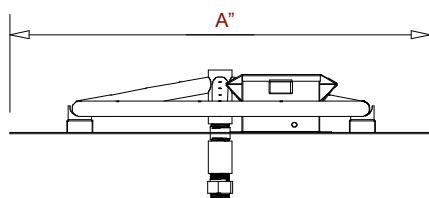

24VAC MODELS
REQUIRE HPC/SEBCO
24vac, 100W Power
Supply pg. 28

EI MODELS INCLUDE:

Insert: Fully Assembled
Flex Line: Gas Input
Instructions

SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67

Accessories (Pg. 28):

Timers
Power Supplies
E-Stop



Electronic Ignition Models - EI Series Specifications



See Pg. 8 for
EI System Features

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|------------|----------------|---------------------|---------------------------|--|-----------|---------|
| | | | | HI/LO MODELS COME WITH REMOTE (this column only) | | |
| 18" | 120vac | Natural Gas | 18FSSEI-SQ-NG/120VAC | 18FSSEI-SQ-HI/LO-NG/120VAC | 12" Penta | 65k |
| | | Liquid Propane | 18FSSEI-SQ-LP/120VAC | 18FSSEI-SQ-HI/LO-LP/120VAC | | |
| * 24vac | Natural Gas | 18FSSEI-SQ-NG/24VAC | 18FSSEI-SQ-HI/LO-NG/24VAC | | | |
| | Liquid Propane | 18FSSEI-SQ-LP/24VAC | 18FSSEI-SQ-HI/LO-LP/24VAC | | | |
| 24" | 120vac | Natural Gas | 24FSSEI-SQ-NG/120VAC | 24FSSEI-SQ-HI/LO-NG/120VAC | 18" Penta | 125k |
| | | Liquid Propane | 24FSSEI-SQ-LP/120VAC | 24FSSEI-SQ-HI/LO-LP/120VAC | | |
| * 24vac | Natural Gas | 24FSSEI-SQ-NG/24VAC | 24FSSEI-SQ-HI/LO-NG/24VAC | | | |
| | Liquid Propane | 24FSSEI-SQ-LP/24VAC | 24FSSEI-SQ-HI/LO-LP/24VAC | | | |
| 30" | 120vac | Natural Gas | 30FSSEI-SQ-NG/120VAC | 30FSSEI-SQ-HI/LO-NG/120VAC | 24" Penta | 200k |
| | | Liquid Propane | 30FSSEI-SQ-LP/120VAC | 30FSSEI-SQ-HI/LO-LP/120VAC | | |
| * 24vac | Natural Gas | 30FSSEI-SQ-NG/24VAC | 30FSSEI-SQ-HI/LO-NG/24VAC | | | |
| | Liquid Propane | 30FSSEI-SQ-LP/24VAC | 30FSSEI-SQ-HI/LO-LP/24VAC | | | |
| 36" | 120vac | Natural Gas | 36FSSEI-SQ-NG/120VAC | 36FSSEI-SQ-HI/LO-NG/120VAC | 30" Penta | 250k |
| | | Liquid Propane | 36FSSEI-SQ-LP/120VAC | 36FSSEI-SQ-HI/LO-LP/120VAC | | |
| * 24vac | Natural Gas | 36FSSEI-SQ-NG/24VAC | 36FSSEI-SQ-HI/LO-NG/24VAC | | | |
| | Liquid Propane | 36FSSEI-SQ-LP/24VAC | 36FSSEI-SQ-HI/LO-LP/24VAC | | | |
| 42" | 120vac | Natural Gas | 42FSSEI-SQ-NG/120VAC | N/A | 36" Penta | 400k |
| | | Liquid Propane | 42FSSEI-SQ-LP/120VAC | N/A | | |
| * 24vac | Natural Gas | 42FSSEI-SQ-NG/24VAC | | N/A | | |
| | Liquid Propane | 42FSSEI-SQ-LP/24VAC | | N/A | | |

***IMPORTANT:** 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28

Match proper accessories to your
fire pit model - see Pg. 67-70.



30" Square Push Button/Flame Sense (FPPK-FLEX)

24" Square Match Lit (MLFPK-FLEX)

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled Instructions



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models

Vinyl Cover: See Chart on Pg. 69

Lava Rock / Glass: See Chart on Pg. 69

Accessories:



MLFPK Paver Bracket - Pg. 29



FPPK Mounting Sleeve - Pg. 29

Media
Outdoor Logs
Hard Covers

Pg. 48
Pg. 50
Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|-------------------|-------------------------|-----------|---------|-------------|
| 18" | Natural Gas | FPPK18-SQ-FLEX-NG | | 12" Penta | 65k | 36" |
| | Liquid Propane | FPPK18-SQ-FLEX-LP | FPPK18-SQ-FLEX-LP-ST | | | |
| 24" | Natural Gas | FPPK24-SQ-FLEX-NG | | 18" Penta | 90k | 36" |
| | Liquid Propane | FPPK24-SQ-FLEX-LP | FPPK24-SQ-FLEX-LP-ST | | | |
| 30" | Natural Gas | FPPK30-SQ-FLEX-NG | | 24" Penta | 140k | 36" |
| | Liquid Propane | FPPK30-SQ-FLEX-LP | | | | |
| 36" | Natural Gas | FPPK36-SQ-FLEX-NG | | 30" Penta | 140k | 36" |
| | Liquid Propane | FPPK36-SQ-FLEX-LP | | | | |



Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models

Vinyl Cover: See Chart on Pg. 70

Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|-------------------|-------------------------|-----------|---------|-------------|
| 18" | Natural Gas | MLFPK18SQ-FLEX-NG | | 12" Penta | 65k | 36" |
| | Liquid Propane | MLFPK18SQ-FLEX-LP | MLFPK18SQ-FLEX-LP-ST | | | |
| 24" | Natural Gas | MLFPK24SQ-FLEX-NG | | 24" Penta | 65k | 36" |
| | Liquid Propane | MLFPK24SQ-FLEX-LP | MLFPK24SQ-FLEX-LP-ST | | | |
| 30" | Natural Gas | MLFPK30SQ-FLEX-NG | | 18" Penta | 65k | 36" |
| | Liquid Propane | MLFPK30SQ-FLEX-LP | MLFPK30SQ-FLEX-LP-ST | | | |



Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



Need help? Use our fire pit selector at hpcfire.com

RECTANGLE INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES

H-BURNER INSERTS


Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:



Made of #304, 18 gauge Stainless Steel
Raised hub H-burner for water prevention
Bolted gas fitting for strength
Weep holes for drainage

EI MODELS INCLUDE:

Insert: Fully Assembled
Flex Line: Gas Input
Instructions

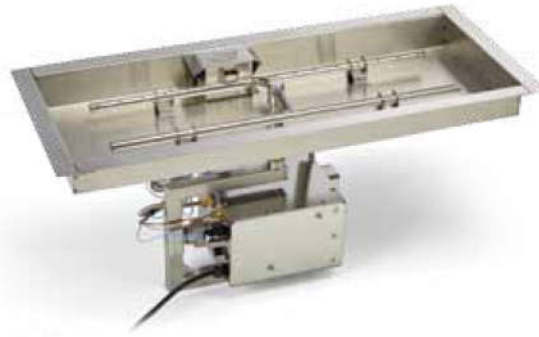

36" X 14" Electronic Ignition (EI)

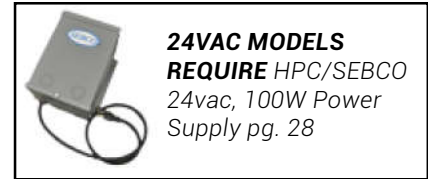

**24VAC MODELS
REQUIRE HPC/SEBCO**
24vac, 100W Power
Supply pg. 28

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28
24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
Vinyl Cover: See Chart on Pg. 67
Lava Rock / Glass: See Chart on Pg. 67



**See Pg. 8 for
EI System Features**

Electronic Ignition Models - EI Series Specifications

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|------------------|---------|----------------|-----------------------|---|-----------|---------|
| | | | | HI/LO MODELS COME WITH REMOTE (this column only) | | |
| 24" X 12" | 120vac | Natural Gas | 24X12SSEI-H-NG/120VAC | 24X12SSEI-H-HI/LO-NG/120VAC | 18" X 6" | 75k |
| | | Liquid Propane | 24X12SSEI-H-LP/120VAC | 24X12SSEI-H-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 24X12SSEI-H-NG/24VAC | 24X12SSEI-H-HI/LO-NG/24VAC | H-Burner | |
| | | Liquid Propane | 24X12SSEI-H-LP/24VAC | 24X12SSEI-H-HI/LO-LP/24VAC | | |
| 30" X 12" | 120vac | Natural Gas | 30X12SSEI-H-NG/120VAC | 30X12SSEI-H-HI/LO-NG/120VAC | 24" X 6" | 100k |
| | | Liquid Propane | 30X12SSEI-H-LP/120VAC | 30X12SSEI-H-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 30X12SSEI-H-NG/24VAC | 30X12SSEI-H-HI/LO-NG/24VAC | H-Burner | |
| | | Liquid Propane | 30X12SSEI-H-LP/24VAC | 30X12SSEI-H-HI/LO-LP/24VAC | | |
| 36" X 14" | 120vac | Natural Gas | 36X14SSEI-H-NG/120VAC | 36X14SSEI-H-HI/LO-NG/120VAC | 30" X 8" | 125k |
| | | Liquid Propane | 36X14SSEI-H-LP/120VAC | 36X14SSEI-H-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 36X14SSEI-H-NG/24VAC | 36X14SSEI-H-HI/LO-NG/24VAC | H-Burner | |
| | | Liquid Propane | 36X14SSEI-H-LP/24VAC | 36X14SSEI-H-HI/LO-LP/24VAC | | |
| 42" X 14" | 120vac | Natural Gas | 42X14SSEI-H-NG/120VAC | 42X14SSEI-H-HI/LO-NG/120VAC | 36" X 8" | 150k |
| | | Liquid Propane | 42X14SSEI-H-LP/120VAC | 42X14SSEI-H-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 42X14SSEI-H-NG/24VAC | 42X14SSEI-H-HI/LO-NG/24VAC | H-Burner | |
| | | Liquid Propane | 42X14SSEI-H-LP/24VAC | 42X14SSEI-H-HI/LO-LP/24VAC | | |
| 54" X 16" | 120vac | Natural Gas | 54X16SSEI-H-NG/120VAC | 54X16SSEI-H-HI/LO-NG/120VAC | 48" X 10" | 200k |
| | | Liquid Propane | 54X16SSEI-H-LP/120VAC | 54X16SSEI-H-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 54X16SSEI-H-NG/24VAC | 54X16SSEI-H-HI/LO-NG/24VAC | H-Burner | |
| | | Liquid Propane | 54X16SSEI-H-LP/24VAC | 54X16SSEI-H-HI/LO-LP/24VAC | | |
| 66" X 16" | 120vac | Natural Gas | 66X16SSEI-H-NG/120VAC | 66X16SSEI-H-HI/LO-NG/120VAC | 60" X 10" | 250k |
| | | Liquid Propane | 66X16SSEI-H-LP/120VAC | 66X16SSEI-H-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 66X16SSEI-H-NG/24VAC | 66X16SSEI-H-HI/LO-NG/24VAC | H-Burner | |
| | | Liquid Propane | 66X16SSEI-H-LP/24VAC | 66X16SSEI-H-HI/LO-LP/24VAC | | |
| 78" X 16" | 120vac | Natural Gas | 78X16SSEI-H-NG/120VAC | 78X16SSEI-H-HI/LO-NG/120VAC | 72" X 10" | 300k |
| | | Liquid Propane | 78X16SSEI-H-LP/120VAC | 78X16SSEI-H-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 78X16SSEI-H-NG/24VAC | 78X16SSEI-H-HI/LO-NG/24VAC | H-Burner | |
| | | Liquid Propane | 78X16SSEI-H-LP/24VAC | 78X16SSEI-H-HI/LO-LP/24VAC | | |
| 90" X 16" | 120vac | Natural Gas | 90X16SSEI-H-NG/120VAC | NA | 84" X 10" | 350k |
| | | Liquid Propane | 90X16SSEI-H-LP/120VAC | NA | | |
| | * 24vac | Natural Gas | 90X16SSEI-H-NG/24VAC | NA | H-Burner | |
| | | Liquid Propane | 90X16SSEI-H-LP/24VAC | NA | | |

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

**Match proper accessories to your
fire pit model - see Pg. 67-70.**



42" X 14" Push Button/Flame Sense (FPPK-FLEX)

30" X 12" Match Lit (MLFPK-FLEX)



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
Vinyl Cover: See Chart on Pg. 69
Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled Instructions

Accessories:



MLFPK Paver Bracket - Pg. 29



FPPK Mounting Sleeve - Pg. 29

Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|-----------|----------------|---------------------|-------------------------|-----------|---------|-------------|
| 24" X 12" | Natural Gas | FPPK24X12-H-FLEX-NG | | 18" X 6" | 75k | 36" |
| | Liquid Propane | FPPK24X12-H-FLEX-LP | FPPK24X12-H-FLEX-LP-ST | H Burner | | |
| 30" X 12" | Natural Gas | FPPK30X12-H-FLEX-NG | | 24" X 6" | 90k | 36" |
| | Liquid Propane | FPPK30X12-H-FLEX-LP | FPPK30X12-H-FLEX-LP-ST | H burner | | |
| 36" X 14" | Natural Gas | FPPK36X14-H-FLEX-NG | | 30" X 8" | 90k | 36" |
| | Liquid Propane | FPPK36X14-H-FLEX-LP | FPPK36X14-H-FLEX-LP-ST | H Burner | | |
| 42" X 14" | Natural Gas | FPPK42X14-H-FLEX-NG | | 36" X 8" | 140k | 36" |
| | Liquid Propane | FPPK42X14-H-FLEX-LP | | H Burner | | |
| 54" X 16" | Natural Gas | FPPK54X16-H-FLEX-NG | | 48" X 10" | 140k | 36" |
| | Liquid Propane | FPPK54X16-H-FLEX-LP | | H Burner | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
Vinyl Cover: See Chart on Pg. 70
Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|-----------|----------------|----------------------|-------------------------|----------|---------|-------------|
| 24" X 12" | Natural Gas | MLFPK24X12-H-FLEX-NG | | 18" X 6" | 65k | 36" |
| | Liquid Propane | MLFPK24X12-H-FLEX-LP | MLFPK24X12-H-FLEX-LP-ST | H Burner | | |
| 30" X 12" | Natural Gas | MLFPK30X12-H-FLEX-NG | | 24" X 6" | 65k | 36" |
| | Liquid Propane | MLFPK30X12-H-FLEX-LP | MLFPK30X12-H-FLEX-LP-ST | H Burner | | |
| 36" X 14" | Natural Gas | MLFPK36X14-H-FLEX-NG | | 30" X 8" | 65k | 36" |
| | Liquid Propane | MLFPK36X14-H-FLEX-LP | MLFPK36X14-H-FLEX-LP-ST | H Burner | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

RECTANGLE INSERT MODELS (CONTINUED)

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES

S-FIRE BURNER INSERTS


Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:

Made of #304, 18 gauge Stainless Steel
Raised hub S-Fire burner for water prevention
Bolted gas fitting for strength
Weep holes for drainage

EI MODELS INCLUDE:

Insert: Fully Assembled
Flex Line: Gas Input Instructions

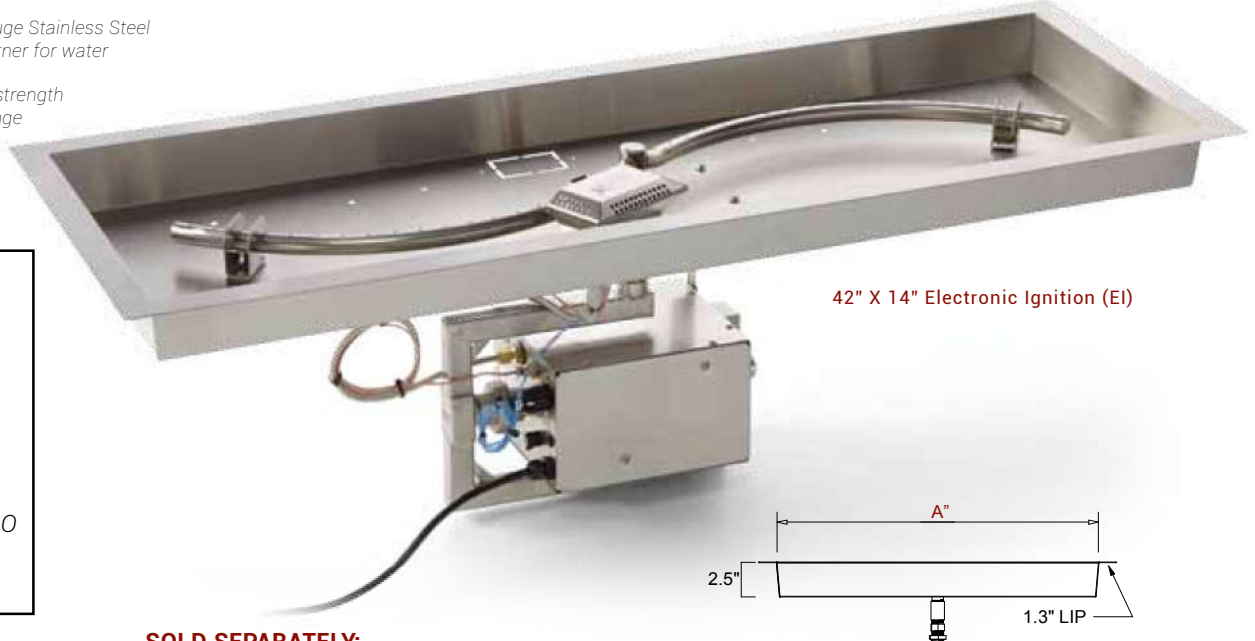

SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



See Pg. 8 for EI System Features

Electronic Ignition Models - EI Series Specifications

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|---|---------|----------------|-----------------------|----------------------------------|---------------------|---------|
| HI/LO MODELS COME WITH REMOTE (this column only) | | | | | | |
| 36" X 14" | 120vac | Natural Gas | 36X14SSEI-S-NG/120VAC | 36X14SSEI-S-HI/LO-NG/120VAC | 30" X 8" S-Fire | 75k |
| | * 24vac | Liquid Propane | 36X14SSEI-S-LP/120VAC | 36X14SSEI-S-HI/LO-LP/120VAC | | |
| | 120vac | Natural Gas | 36X14SSEI-S-NG/24VAC | 36X14SSEI-S-HI/LO-NG/24VAC | | |
| | * 24vac | Liquid Propane | 36X14SSEI-S-LP/24VAC | 36X14SSEI-S-HI/LO-LP/24VAC | | |
| 42" X 14" | 120vac | Natural Gas | 42X14SSEI-S-NG/120VAC | 42X14SSEI-S-HI/LO-NG/120VAC | 36" X 8" S-Fire | 85k |
| | * 24vac | Liquid Propane | 42X14SSEI-S-LP/120VAC | 42X14SSEI-S-HI/LO-LP/120VAC | | |
| | 120vac | Natural Gas | 42X14SSEI-S-NG/24VAC | 42X14SSEI-S-HI/LO-NG/24VAC | | |
| | * 24vac | Liquid Propane | 42X14SSEI-S-LP/24VAC | 42X14SSEI-S-HI/LO-LP/24VAC | | |
| 54" X 16" | 120vac | Natural Gas | 54X16SSEI-S-NG/120VAC | 54X16SSEI-S-HI/LO-NG/120VAC | 48" X 10" S-Fire | 110k |
| | * 24vac | Liquid Propane | 54X16SSEI-S-LP/120VAC | 54X16SSEI-S-HI/LO-LP/120VAC | | |
| | 120vac | Natural Gas | 54X16SSEI-S-NG/24VAC | 54X16SSEI-S-HI/LO-NG/24VAC | | |
| | * 24vac | Liquid Propane | 54X16SSEI-S-LP/24VAC | 54X16SSEI-S-HI/LO-LP/24VAC | | |
| 66" X 16" | 120vac | Natural Gas | 66X16SSEI-S-NG/120VAC | 66X16SSEI-S-HI/LO-NG/120VAC | 60" X 10" S-Fire | 135k |
| | * 24vac | Liquid Propane | 66X16SSEI-S-LP/120VAC | 66X16SSEI-S-HI/LO-LP/120VAC | | |
| | 120vac | Natural Gas | 66X16SSEI-S-NG/24VAC | 66X16SSEI-S-HI/LO-NG/24VAC | | |
| | * 24vac | Liquid Propane | 66X16SSEI-S-LP/24VAC | 66X16SSEI-S-HI/LO-LP/24VAC | | |
| 78" X 16" | 120vac | Natural Gas | 78X16SSEI-S-NG/120VAC | 78X16SSEI-S-HI/LO-NG/120VAC | 72" X 10" S-Fire | 165k |
| | * 24vac | Liquid Propane | 78X16SSEI-S-LP/120VAC | 78X16SSEI-S-HI/LO-LP/120VAC | | |
| | 120vac | Natural Gas | 78X16SSEI-S-NG/24VAC | 78X16SSEI-S-HI/LO-NG/24VAC | | |
| | * 24vac | Liquid Propane | 78X16SSEI-S-LP/24VAC | 78X16SSEI-S-HI/LO-LP/24VAC | | |

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.



36" X 14" Match Lit
(MLFPK-FLEX)

36" X 14" Push Button/Flame
Sense (FPPK-FLEX)

Accessories:



Media Outdoor Logs Pg. 48
Hard Covers Pg. 50
Pg. 52



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
Vinyl Cover: See Chart on Pg. 69
Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled
Instructions

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|-----------|----------------|---------------------|-------------------------|------------------|---------|-------------|
| 36" X 14" | Natural Gas | FPPK36X14-S-FLEX-NG | FPPK36X14-S-FLEX-LP-ST | 30" X 8" S-Fire | 75k | 36" |
| | Liquid Propane | FPPK36X14-S-FLEX-LP | | | | |
| 42" X 14" | Natural Gas | FPPK42X14-S-FLEX-NG | FPPK42X14-S-FLEX-LP-ST | 36" X 8" S-Fire | 90k | 36" |
| | Liquid Propane | FPPK42X14-S-FLEX-LP | | | | |
| 54" X 16" | Natural Gas | FPPK54X16-S-FLEX-NG | | 48" X 10" S-Fire | 140k | 36" |
| | Liquid Propane | FPPK54X16-S-FLEX-LP | | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
Vinyl Cover: See Chart on Pg. 70
Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|-----------|----------------|----------------------|-------------------------|-----------------|---------|-------------|
| 36" X 14" | Natural Gas | MLFPK36X14-S-FLEX-NG | MLFPK36X14-S-FLEX-LP-ST | 30" X 8" S-Fire | 65k | 36" |
| | Liquid Propane | MLFPK36X14-S-FLEX-LP | | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

LINEAR INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES

LINEAR TROUGH INSERTS


The trough pan was introduced to industry by HPC in 2008- it is still a popular model with our Dealers.

EI MODELS INCLUDE:

Insert: Fully Assembled

Flex Line: Gas Input

Instructions




**24VAC MODELS
REQUIRE HPC/SEBCO**
24vac, 100W Power
Supply pg. 28

Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:

Made of #304 Stainless Steel (48" and smaller- 18g, 60" and larger- 16g)
Sidewalls adds rigidity- stronger than flat pans
Weep holes for drainage



60" Electronic Ignition (EI)

SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67

Accessories (Pg. 28):

Timers
Power Supplies
E-Stop



**See Pg. 8 for EI
System Features**

Electronic Ignition Models - EI Series Specifications

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|-----------|--------|----------------|-----------------------|---|----------|---------|
| | | | | HI/LO MODELS COME WITH REMOTE (this column only) | | |
| 24" | 120vac | Natural Gas | 24SSEI-TRGH-NG/120VAC | 24SSEI-TRGH-HI/LO-NG/120VAC | 24" | 50k |
| | | Liquid Propane | 24SSEI-TRGH-LP/120VAC | 24SSEI-TRGH-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | 24SSEI-TRGH-NG/24VAC | 24SSEI-TRGH-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 24SSEI-TRGH-LP/24VAC | 24SSEI-TRGH-HI/LO-LP/24VAC | | |
| 36" | 120vac | Natural Gas | 36SSEI-TRGH-NG/120VAC | 36SSEI-TRGH-HI/LO-NG/120VAC | 36" | 75k |
| | | Liquid Propane | 36SSEI-TRGH-LP/120VAC | 36SSEI-TRGH-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | 36SSEI-TRGH-NG/24VAC | 36SSEI-TRGH-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 36SSEI-TRGH-LP/24VAC | 36SSEI-TRGH-HI/LO-LP/24VAC | | |
| 48" | 120vac | Natural Gas | 48SSEI-TRGH-NG/120VAC | 48SSEI-TRGH-HI/LO-NG/120VAC | 48" | 100k |
| | | Liquid Propane | 48SSEI-TRGH-LP/120VAC | 48SSEI-TRGH-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | 48SSEI-TRGH-NG/24VAC | 48SSEI-TRGH-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 48SSEI-TRGH-LP/24VAC | 48SSEI-TRGH-HI/LO-LP/24VAC | | |
| 60" | 120vac | Natural Gas | 60SSEI-TRGH-NG/120VAC | 60SSEI-TRGH-HI/LO-NG/120VAC | 60" | 125k |
| | | Liquid Propane | 60SSEI-TRGH-LP/120VAC | 60SSEI-TRGH-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | 60SSEI-TRGH-NG/24VAC | 60SSEI-TRGH-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 60SSEI-TRGH-LP/24VAC | 60SSEI-TRGH-HI/LO-LP/24VAC | | |
| 72" | 120vac | Natural Gas | 72SSEI-TRGH-NG/120VAC | 72SSEI-TRGH-HI/LO-NG/120VAC | 72" | 150k |
| | | Liquid Propane | 72SSEI-TRGH-LP/120VAC | 72SSEI-TRGH-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | 72SSEI-TRGH-NG/24VAC | 72SSEI-TRGH-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 72SSEI-TRGH-LP/24VAC | 72SSEI-TRGH-HI/LO-LP/24VAC | | |
| 96" | 120vac | Natural Gas | 96SSEI-TRGH-NG/120VAC | 96SSEI-TRGH-HI/LO-NG/120VAC | 96" | 200k |
| | | Liquid Propane | 96SSEI-TRGH-LP/120VAC | 96SSEI-TRGH-HI/LO-LP/120VAC | | |
| * 24vac | | Natural Gas | 96SSEI-TRGH-NG/24VAC | 96SSEI-TRGH-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 96SSEI-TRGH-LP/24VAC | 96SSEI-TRGH-HI/LO-LP/24VAC | | |

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

**Match proper accessories to your
fire pit model - see Pg. 67-70.**



Current
Design



New
Design



HPC is currently phasing out the V-style trough as inventories are depleted- we are replacing with a new design. All dimensions for both types are the same (L,W & H).



36" Match Lit (MLFPK-FLEX)



60" Push Button/Flame Sense (FPPK-FLEX)



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models

Vinyl Cover: See Chart on Pg. 69

Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled

Instructions

Accessories:



MLFPK
Paver
Bracket -
Pg. 29



FPPK Mounting
Sleeve - Pg. 29

Media
Outdoor Logs
Hard Covers

Pg. 48
Pg. 50
Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|---------------------|-------------------------|--------------|---------|-------------|
| 24" | Natural Gas | FPPK24-TRGH-FLEX-NG | | 24" T-Burner | 50k | 36" |
| | Liquid Propane | FPPK24-TRGH-FLEX-LP | FPPK24-TRGH-FLEX-LP-ST | | | |
| 36" | Natural Gas | FPPK36-TRGH-FLEX-NG | | 36" T-Burner | 75k | 36" |
| | Liquid Propane | FPPK36-TRGH-FLEX-LP | FPPK36-TRGH-FLEX-LP-ST | | | |
| 48" | Natural Gas | FPPK48-TRGH-FLEX-NG | | 48" T-Burner | 90k | 36" |
| | Liquid Propane | FPPK48-TRGH-FLEX-LP | FPPK48-TRGH-FLEX-LP-ST | | | |
| 60" | Natural Gas | FPPK60-TRGH-FLEX-NG | | 60" T-Burner | 90k | 36" |
| | Liquid Propane | FPPK60-TRGH-FLEX-LP | FPPK60-TRGH-FLEX-LP-ST | | | |
| 72" | Natural Gas | FPPK72-TRGH-FLEX-NG | | 72" T-Burner | 140k | 36" |
| | Liquid Propane | FPPK72-TRGH-FLEX-LP | | | | |
| 96" | Natural Gas | FPPK96-TRGH-FLEX-NG | | 96" T-Burner | 140k | 36" |
| | Liquid Propane | FPPK96-TRGH-FLEX-LP | | | | |



Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models

Vinyl Cover: See Chart on Pg. 70

Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|------|----------------|----------------------|-------------------------|--------------|---------|-------------|
| 24" | Natural Gas | MLFPK24 TRGH-FLEX-NG | | 24" T-Burner | 50k | 36" |
| | Liquid Propane | MLFPK24 TRGH-FLEX-LP | MLFPK24 TRGH-FLEX-LP-ST | | | |
| 36" | Natural Gas | MLFPK36 TRGH-FLEX-NG | | 36" T-Burner | 65k | 36" |
| | Liquid Propane | MLFPK36 TRGH-FLEX-LP | MLFPK36 TRGH-FLEX-LP-ST | | | |
| 48" | Natural Gas | MLFPK48 TRGH-FLEX-NG | | 48" T-Burner | 65k | 36" |
| | Liquid Propane | MLFPK48 TRGH-FLEX-LP | MLFPK48 TRGH-FLEX-LP-ST | | | |



Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



Need help? Use our fire pit selector at hpcfired.com

LINEAR INSERT MODELS (CONTINUED)

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES


LINEAR INTERLINK PAN INSERTS

EI MODELS INCLUDE:

Insert: Fully Assembled
Flex Line: Gas Input
Instructions



61" X 8" Electronic Ignition (EI)



Accessories (Pg. 28):

Timers
Power Supplies
E-Stop




SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67

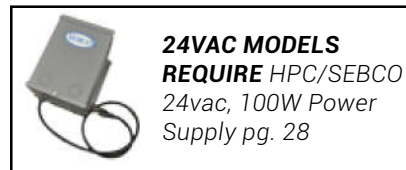


24VAC MODELS

REQUIRE HPC/SEBCO
24vac, 100W Power
Supply pg. 28

Benefits: Partial sidewall for media retention; used in enclosures that have recess mount of insert.

Features:

Made of #304, 18 gauge Stainless Steel
Sidewalls adds rigidity- stronger than flat pans
Removable center section on larger models
Raised hub T-Burner for water prevention
Secure gas fitting for strength
Weep holes for drainage




Electronic Ignition Models - EI Series Specifications

**See Pg. 8 for
EI System Features**

| Size (A") | Power | Gas type | Model - Flame ON/OFF | Model - Flame Adjustment (HI/LO) | Burner | Max BTU |
|---|---------|----------------|-----------------------|----------------------------------|----------|---------|
| HI/LO MODELS COME WITH REMOTE (this column only) | | | | | | |
| 25" X 8" | 120vac | Natural Gas | 25X8SSEI-L-NG/120VAC | 25X8SSEI-L-HI/LO-NG/120VAC | 24" | 50k |
| | | Liquid Propane | 25X8SSEI-L-LP/120VAC | 25X8SSEI-L-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 25X8SSEI-L-NG/24VAC | 25X8SSEI-L-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 25X8SSEI-L-LP/24VAC | 25X8SSEI-L-HI/LO-LP/24VAC | | |
| 37" X 8" | 120vac | Natural Gas | 37X8SSEI-L-NG/120VAC | 37X8SSEI-L-HI/LO-NG/120VAC | 36" | 75k |
| | | Liquid Propane | 37X8SSEI-L-LP/120VAC | 37X8SSEI-L-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 37X8SSEI-L-NG/24VAC | 37X8SSEI-L-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 37X8SSEI-L-LP/24VAC | 37X8SSEI-L-HI/LO-LP/24VAC | | |
| 49" X 8" | 120vac | Natural Gas | 49X8SSEI-L-NG/120VAC | 49X8SSEI-L-HI/LO-NG/120VAC | 48" | 100k |
| | | Liquid Propane | 49X8SSEI-L-LP/120VAC | 49X8SSEI-L-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 49X8SSEI-L-NG/24VAC | 49X8SSEI-L-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 49X8SSEI-L-LP/24VAC | 49X8SSEI-L-HI/LO-LP/24VAC | | |
| 61" X 8" | 120vac | Natural Gas | 61X8SSEI-L-NG/120VAC | 61X8SSEI-L-HI/LO-NG/120VAC | 60" | 125k |
| | | Liquid Propane | 61X8SSEI-L-LP/120VAC | 61X8SSEI-L-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 61X8SSEI-L-NG/24VAC | 61X8SSEI-L-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 61X8SSEI-L-LP/24VAC | 61X8SSEI-L-HI/LO-LP/24VAC | | |
| 73 X 8" | 120vac | Natural Gas | 73X8SSEI-L-NG/120VAC | 73X8SSEI-L-HI/LO-NG/120VAC | 72" | 150k |
| | | Liquid Propane | 73X8SSEI-L-LP/120VAC | 73X8SSEI-L-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 73X8SSEI-L-NG/24VAC | 73X8SSEI-L-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 73X8SSEI-L-LP/24VAC | 73X8SSEI-L-HI/LO-LP/24VAC | | |
| 97 X 8" | 120vac | Natural Gas | 97X8SSEI-L-NG/120VAC | 97X8SSEI-L-HI/LO-NG/120VAC | 96" | 200k |
| | | Liquid Propane | 97X8SSEI-L-LP/120VAC | 97X8SSEI-L-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 97X8SSEI-L-NG/24VAC | 97X8SSEI-L-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 97X8SSEI-L-LP/24VAC | 97X8SSEI-L-HI/LO-LP/24VAC | | |
| 121 X 8" | 120vac | Natural Gas | 121X8SSEI-L-NG/120VAC | 121X8SSEI-L-HI/LO-NG/120VAC | 120" | 250k |
| | | Liquid Propane | 121X8SSEI-L-LP/120VAC | 121X8SSEI-L-HI/LO-LP/120VAC | | |
| | * 24vac | Natural Gas | 121X8SSEI-L-NG/24VAC | 121X8SSEI-L-HI/LO-NG/24VAC | T-Burner | |
| | | Liquid Propane | 121X8SSEI-L-LP/24VAC | 121X8SSEI-L-HI/LO-LP/24VAC | | |

***IMPORTANT:** 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28

**Match proper accessories to your
fire pit model - see Pg. 67-70.**

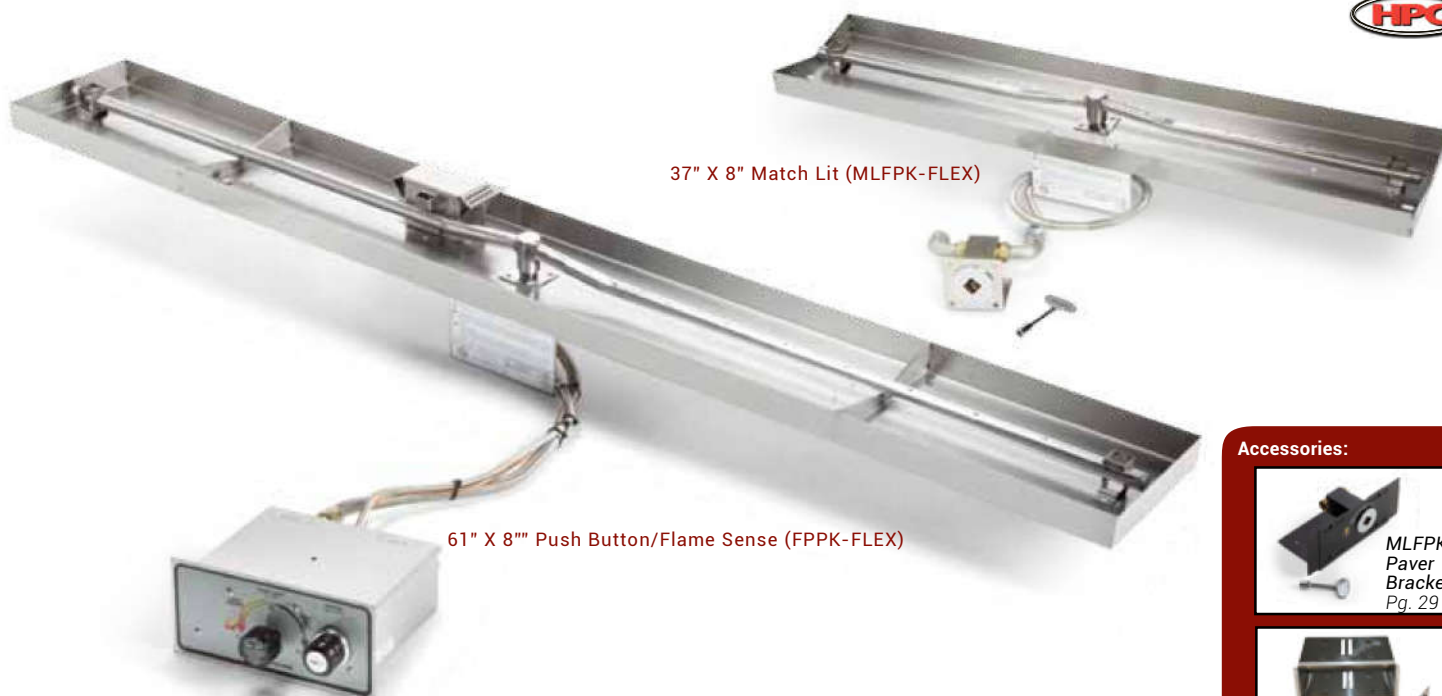

37" X 8" Match Lit (MLFPK-FLEX)

61" X 8" Push Button/Flame Sense (FPPK-FLEX)

Accessories:



Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
Vinyl Cover: See Chart on Pg. 69
Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled
Instructions

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|----------|----------------|--------------------|-------------------------|--------------|---------|-------------|
| 25" X 8" | Natural Gas | FPPK25X8-L-FLEX-NG | | 24" T-Burner | 50k | 36" |
| | Liquid Propane | FPPK25X8-L-FLEX-LP | FPPK25X8-L-FLEX-LP-ST | | | |
| 37" X 8" | Natural Gas | FPPK37X8-L-FLEX-NG | | 36" T-Burner | 75k | 36" |
| | Liquid Propane | FPPK37X8-L-FLEX-LP | FPPK37X8-L-FLEX-LP-ST | | | |
| 49" X 8" | Natural Gas | FPPK49X8-L-FLEX-NG | | 48" T-Burner | 90k | 36" |
| | Liquid Propane | FPPK49X8-L-FLEX-LP | FPPK49X8-L-FLEX-LP-ST | | | |
| 61" X 8" | Natural Gas | FPPK61X8-L-FLEX-NG | | 60" T-Burner | 90k | 36" |
| | Liquid Propane | FPPK61X8-L-FLEX-LP | FPPK61X8-L-FLEX-LP-ST | | | |
| 73" X 8" | Natural Gas | FPPK73X8-L-FLEX-NG | | 72" T-Burner | 140k | 36" |
| | Liquid Propane | FPPK73X8-L-FLEX-LP | | | | |
| 97" X 8" | Natural Gas | FPPK97X8-L-FLEX-NG | | 96" T-Burner | 140k | 36" |
| | Liquid Propane | FPPK97X8-L-FLEX-LP | | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
Vinyl Cover: See Chart on Pg. 70
Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

| Size | Gas type | Model | Remote Small Tank Model | Burner | Max BTU | * Flex Line |
|----------|----------------|---------------------|-------------------------|--------------|---------|-------------|
| 25" X 8" | Natural Gas | MLFPK25X8-L-FLEX-NG | | 24" T-Burner | 50k | 36" |
| | Liquid Propane | MLFPK25X8-L-FLEX-LP | MLFPK25X8-L-FLEX-LP-ST | | | |
| 37" X 8" | Natural Gas | MLFPK37X8-L-FLEX-NG | | 36" T-Burner | 65k | 36" |
| | Liquid Propane | MLFPK37X8-L-FLEX-LP | MLFPK37X8-L-FLEX-LP-ST | | | |
| 49" X 8" | Natural Gas | MLFPK49X8-L-FLEX-NG | | 48" T-Burner | 65k | 36" |
| | Liquid Propane | MLFPK49X8-L-FLEX-LP | MLFPK49X8-L-FLEX-LP-ST | | | |

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



Need help? Use our fire pit selector at hpcfire.com

CONTROL OPTIONS

ELECTRONIC IGNITION MODELS (EI)

COMMERCIAL AUTOMATIC SHUTOFF TIMERS - 120VAC



694
2 Hour Timer

Stainless Steel Rotary Timer (SPDT, 20A)
1/2" deep. Double gang box recommended.
For use with NEMA 3R box for mounting.

695
12 Hour Timer



694 NEMA
2 Hour Timer

NEMA 3R Box with 694 or 695 timer
Includes timer mounted into the NEMA 3R
box for your convenience.

695 NEMA
12 Hour Timer



696

Four preset switch for indoors.
Can be set at 2, 4, 8, and 12 hours (SPDT, 20A)
Fits single Gangbox

POWER SUPPLIES - FOR 24VAC MODELS

Input Primary - 120VAC, 60/50Hz, 1A max
Output Secondary - 24VAC, 60/50Hz, 4A



| Model | Style |
|---------|-----------|
| 311-PS1 | 1 Output |
| 311-PS3 | 3 Outputs |
| 311-PS5 | 5 Outputs |

COMMERCIAL EMERGENCY STOP - 120VAC OR 24VAC

Perfect for commercial applications
of Evolution 360 or EI systems. Push
button with keyed reset allows supervisor
confirmation. Safely turns off up to 3 circuits
plus one fail safe function.



311-ESTOP-3

Size: 2.8" x 2.8" x 4", Rated for 600VA, 10A
Rated IP65 - Protection against dust and
low pressure water from all directions.

For replacement Keys
use product number:
E-STOP-KEY

120 VAC OUTDOOR ON/OFF REMOTE CONTROL



578-C



Used with EI Fire Pit Systems. 120 VAC models
only. CARLON in-line power control with 3
prong in/out.

DECK INSULATION KIT (EI, FPPK & MLFPPK)

This kit is for use when installing a gas fire pit on a wood or composite deck- provides flame and
excess heat protection around input flex line connection(s). This basalt insulation is for inside
the fire pit enclosure or bowl, is meant to place over a layer of paver blocks (1" min. thickness)
commonly found at your local builder's store. Incoming gas stub must protrude through the deck,
paver blocks and insulation for fire pit flex line connection. Kit includes basalt insulation and
instructions- basalt insulation measures 39.3" x 39.3" (1 sq. meter)- larger fire pits will require more
pieces, insulation is easily cut with utility knife. Smaller bowl kit available.

FPI-DECK20SQ - For fire bowls
includes basalt insulation- 19.6" x
19.6"

FPI-DECK39SQ - For fire pits-
includes basalt insulation- 39.3" x
39.3" (1 sq. meter).

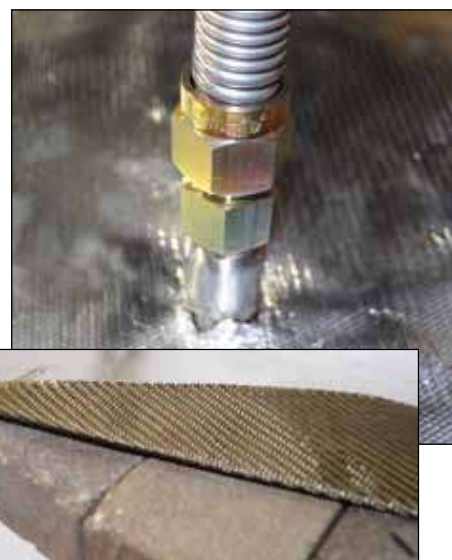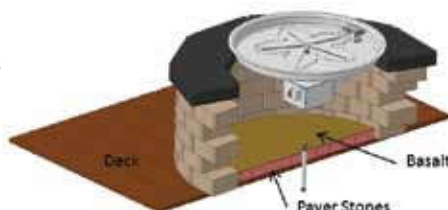

PUSH BUTTON / FLAME SENSE MODELS (FPPK)



FPPK CONTROL BOX MOUNTING SLEEVE

This stainless steel sleeve can be mortared in place with block or fastened to stone or metal - adjustable support bracket included. (7.75"W x 3.25"H x 6.25"D)

FPPK-VBMS



MATCH LIT MODELS (MLFPK)

PAVER BLOCK BRACKET

Designed for the Dante Valve, this bracket allows flexibility and installation ease of the MLFPK decorative key valve. The face plate is adjustable from 8" to 12" width accommodating most pavers. The valve is securely mounted to bracket using decorative flange. (8-12"W x 3.875"H x 5"D)

IMPORTANT: For use only with DANTE Valve #327-CH (Pg. 62)

KVMB-PB



*Valve/Flange
Key not included

REPLACEMENT SMALL TANK KIT - LP (FPPK & MLFPK)

This kit is for use with CSA certified FPPK and MLFPK fire pit models less than 90k Btu- see fire pit insert section for approved models. The kits includes a 90-degree regulator with 48" hose, 24" Flex Line, small tank L-Bracket and fittings for FPPK or MLFPK connection.

For use with CSA Certified FPPK & MLFPK fire pit inserts only

STLPK



PUSH BUTTON IGNITION KITS (FPK SERIES)

UNASSEMBLED - NON-CERTIFIED

**MAP
APPLIES**

*This hard pipe unassembled kit include stainless steel pan and burner, push button ignition switch and igniter, chrome decorative key valve, fittings and flex line. **Natural Gas Only** (Not certified).*

ROUND BOWL INSERTS / NON CERTIFIED

| Size | Gas type | Model | Burner | Max BTU |
|------|-------------|---------------|-----------|---------|
| 19" | Natural Gas | PENTA19FPK-NG | 12" Penta | 90k |
| 25" | Natural Gas | PENTA25FPK-NG | 18" Penta | 150k |
| 31" | Natural Gas | PENTA31FPK-NG | 24" Penta | 150k |

ROUND FLAT INSERTS

| Size | Gas type | Model | Burner | Max BTU |
|------|-------------|---------------|-----------|---------|
| 18" | Natural Gas | PENTA18FPK-NG | 12" Penta | 90k |
| 24" | Natural Gas | PENTA24FPK-NG | 18" Penta | 150k |
| 30" | Natural Gas | PENTA30FPK-NG | 24" Penta | 150k |

SQUARE FLAT INSERTS

| Size | Gas type | Model | Burner | Max BTU |
|------|-------------|------------------|-----------|---------|
| 18" | Natural Gas | PENTA18FPK-SQ-NG | 12" Penta | 90k |
| 24" | Natural Gas | PENTA24FPK-SQ-NG | 18" Penta | 150k |
| 30" | Natural Gas | PENTA30FPK-SQ-NG | 24" Penta | 150k |



MATCH LIT KITS - FPS FLEX LINE SERIES

UNASSEMBLED - NOT CERTIFIED

Includes everything you need to put together a match lit fire pit. Includes burner, a valve with polished chrome flange, flex line and fittings.


PENTA BURNER KITS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|------|----------------|-------------------|----------|------|------------|-----------|
| 12" | Natural Gas | FPS/PENTA12 KIT | 1/2" | 65k | 1/2" | 18" |
| | Liquid Propane | FPS/PENTA12LP KIT | | | | |
| 18" | Natural Gas | FPS/PENTA18 KIT | 1/2" | 125k | 1/2" | 18" |
| | Liquid Propane | FPS/PENTA18LP KIT | | | | |
| 24" | Natural Gas | FPS/PENTA24 KIT | 1/2" | 200k | 1/2" | 18" |
| | Liquid Propane | FPS/PENTA24LP KIT | | | | |
| 30" | Natural Gas | FPS/PENTA30 KIT | 3/4" | 250k | 3/4" | 24" |
| | Liquid Propane | FPS/PENTA30LP KIT | | | | |
| 36" | Natural Gas | FPS/PENTA36 KIT | 3/4" | 300k | 3/4" | 24" |
| | Liquid Propane | FPS/PENTA36LP KIT | | | | |
| 48" | Natural Gas | FPS/PENTA48 KIT | 3/4" | 300k | 3/4" | 24" |
| | Liquid Propane | FPS/PENTA48LP KIT | | | | |

Features:

Burner Ports - 12 and 3 o'clock
Raised Hub Design
Patented Technology

Penta Burner

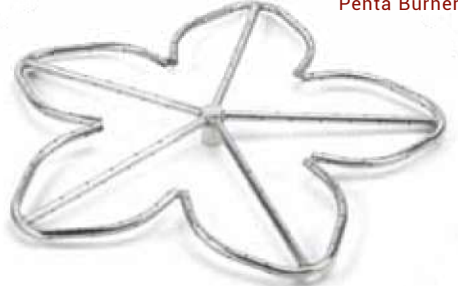


See Pg. 11 for Penta Burner Features



ROUND BURNER KITS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|----------|----------------|---------------|----------|------|------------|-----------|
| 6" | Natural Gas | FPS6 KIT | 1/2" | 60k | 1/2" | 18" |
| | Liquid Propane | FPS6LP KIT | | | | |
| 12" | Natural Gas | FPS12 KIT | 1/2" | 90k | 1/2" | 18" |
| | Liquid Propane | FPS12LP KIT | | | | |
| 18" | Natural Gas | FPS18 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FPS18LP KIT | | | | |
| 24" | Natural Gas | FPS24 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FPS24LP KIT | | | | |
| 24" (HC) | Natural Gas | FPS24HC KIT | 3/4" | 300k | 3/4" | 18" |
| | Liquid Propane | FPS24HCLP KIT | | | | |
| 30" | Natural Gas | FPS30 KIT | 1/2" | 300k | 1/2" | 24" |
| | Liquid Propane | FPS30LP KIT | | | | |
| 30" (HC) | Natural Gas | FPS30HC KIT | 3/4" | 300k | 3/4" | 24" |
| | Liquid Propane | FPS30HCLP KIT | | | | |
| 36" | Natural Gas | FPS36HC KIT | 3/4" | 300k | 3/4" | 24" |
| | Liquid Propane | FPS36HCLP KIT | | | | |
| 48" | Natural Gas | FPS48HC KIT | 3/4" | 300k | 3/4" | 24" |
| | Liquid Propane | FPS48HCLP KIT | | | | |

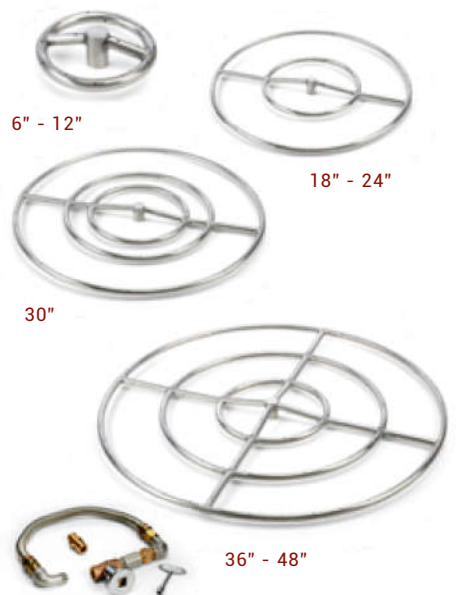

Features:

Burner Ports - Staggered
Raised Hub Design




Photo Courtesy of Stonewall Design & Construction - Pennsylvania

SQUARE BURNER KITS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|------|-------------------------------|----------------------------------|----------|------|------------|-----------|
| 12" | Natural Gas Liquid Propane | FPSSQ12 KIT FPSSQ12LP KIT | 1/2" | 90k | 1/2" | 18" |
| 18" | Natural Gas Liquid Propane | FPSSQ18 KIT FPSSQ18LP KIT | 1/2" | 150k | 1/2" | 18" |
| 24" | Natural Gas Liquid Propane | FPSSQ24 KIT FPSSQ24LP KIT | 1/2" | 150k | 1/2" | 18" |
| 36" | Natural Gas Liquid Propane | FPSSQ36HC KIT FPSSQ36HCLP KIT | 3/4" | 300k | 3/4" | 24" |
| 48" | Natural Gas Liquid Propane | FPSSQ48HC KIT FPSSQ48HCLP KIT | 3/4" | 300k | 3/4" | 24" |


Features:

Burner Ports - Staggered
Raised Hub Design

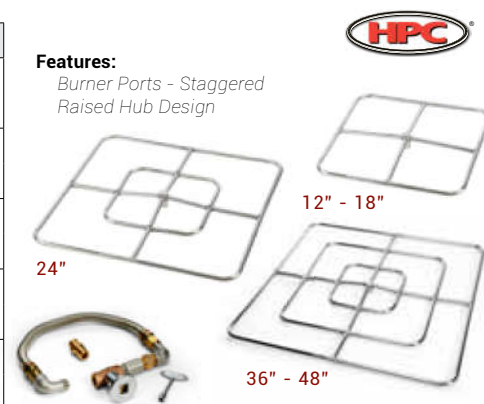

RECTANGLE BURNER KITS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|----------|-------------------------------|--------------------------------------|----------|------|------------|-----------|
| 12"x 6" | Natural Gas Liquid Propane | FPSR12X6 KIT FPSR12X6LP KIT | 1/2" | 90k | 1/2" | 18" |
| 18"x 9" | Natural Gas Liquid Propane | FPSR18X9 KIT FPSR18X9LP KIT | 1/2" | 150k | 1/2" | 18" |
| 24"x 12" | Natural Gas Liquid Propane | FPSR24X12 KIT FPSR24X12LP KIT | 1/2" | 150k | 1/2" | 18" |
| 36"x 18" | Natural Gas Liquid Propane | FPSR36X18 KIT FPSR36X18LP KIT | 1/2" | 200k | 1/2" | 18" |
| 48"x 24" | Natural Gas Liquid Propane | FPSR48X24HC KIT FPSR48X24HCLP KIT | 3/4" | 300k | 3/4" | 24" |

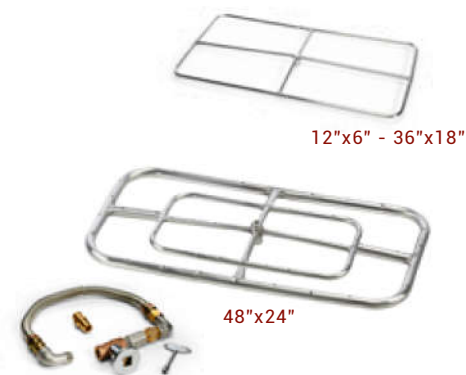


LINEAR BURNER KITS- INTERLINK PAN & T-BURNER, STAINLESS STEEL (#304)

| Size (A") | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|-----------|-------------------------------|---|----------|------|------------|-----------|
| 25"X 8" | Natural Gas Liquid Propane | FPS/LINEAR25X8 KIT FPS/LINEAR25X8-LP | 1/2" | 50k | 1/2" | 18" |
| 37"X 8" | Natural Gas Liquid Propane | FPS/LINEAR37X8 KIT FPS/LINEAR37X8-LP | 1/2" | 75k | 1/2" | 18" |
| 49"X 8" | Natural Gas Liquid Propane | FPS/LINEAR49X8 KIT FPS/LINEAR49X8-LP | 1/2" | 100k | 1/2" | 18" |
| 61"X 8" | Natural Gas Liquid Propane | FPS/LINEAR61X8 KIT FPS/LINEAR61X8-LP | 1/2" | 125k | 1/2" | 18" |
| 73"X 8" | Natural Gas Liquid Propane | FPS/LINEAR73X8 KIT FPS/LINEAR73X8-LP | 1/2" | 150k | 1/2" | 18" |
| 97"X 8" | Natural Gas Liquid Propane | FPS/LINEAR97X8 KIT FPS/LINEAR97X8-LP | 1/2" | 200k | 1/2" | 18" |
| 121"X 8" | Natural Gas Liquid Propane | FPS/LINEAR121X8 KIT FPS/LINEAR121X8-LP | 1/2" | 250k | 1/2" | 18" |


Features:

Sidewalls add strength and hold media
Burner Ports - Staggered
Removable center section on some models
Raised Hub Design

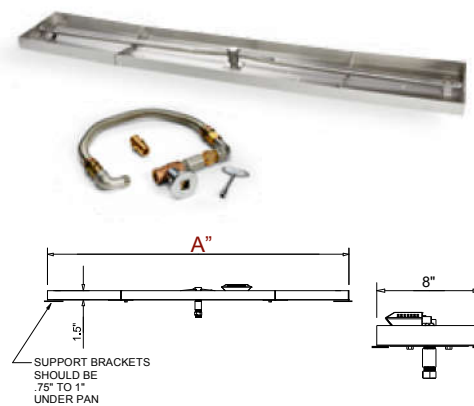

LINEAR BURNER KITS- TROUGH PAN & T-BURNER STAINLESS STEEL (#304)

| Size (A") | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|-----------|-------------------------------|---------------------------------|----------|------|------------|-----------|
| 24" | Natural Gas Liquid Propane | FPS/TRGH24 KIT FPS/TRGH24-LP | 1/2" | 50k | 1/2" | 18" |
| 36" | Natural Gas Liquid Propane | FPS/TRGH36 KIT FPS/TRGH36-LP | 1/2" | 75k | 1/2" | 18" |
| 48" | Natural Gas Liquid Propane | FPS/TRGH48 KIT FPS/TRGH48-LP | 1/2" | 100k | 1/2" | 18" |
| 60" | Natural Gas Liquid Propane | FPS/TRGH60 KIT FPS/TRGH60-LP | 1/2" | 125k | 1/2" | 18" |
| 72" | Natural Gas Liquid Propane | FPS/TRGH72 KIT FPS/TRGH72-LP | 1/2" | 150k | 1/2" | 18" |
| 96" | Natural Gas Liquid Propane | FPS/TRGH96 KIT FPS/TRGH96-LP | 1/2" | 200k | 1/2" | 18" |

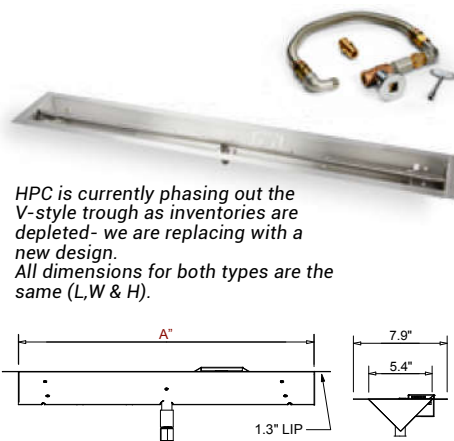

HPC is currently phasing out the V-style trough as inventories are depleted- we are replacing with a new design.
All dimensions for both types are the same (L, W & H).

MATCH LIT KITS - FPS FLEX LINE SERIES (CONTINUED)

UNASSEMBLED - NOT CERTIFIED

Includes everything you need to put together a match lit fire pit. Includes burner, a valve with polished chrome flange, flex line and fittings.

S-FIRE BURNER KITS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|----------|----------------|-------------------|----------|------|------------|-----------|
| 30"x 8" | Natural Gas | FPS/SFIRE30 KIT | 1/2" | 65k | 1/2" | 18" |
| | Liquid Propane | FPS/SFIRE30LP KIT | | | | |
| 36"x 8" | Natural Gas | FPS/SFIRE36 KIT | 1/2" | 85k | 1/2" | 18" |
| | Liquid Propane | FPS/SFIRE36LP KIT | | | | |
| 48"x 10" | Natural Gas | FPS/SFIRE48 KIT | 1/2" | 110k | 1/2" | 18" |
| | Liquid Propane | FPS/SFIRE48LP KIT | | | | |
| 60"x 10" | Natural Gas | FPS/SFIRE60 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FPS/SFIRE60LP KIT | | | | |
| 72"x 10" | Natural Gas | FPS/SFIRE72 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FPS/SFIRE72LP KIT | | | | |

Features:

Burner Ports - Small Separation for Distinctive S-Pattern Flame
Raised Hub Design



H-BURNER KITS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|----------|----------------|------------------|----------|------|------------|-----------|
| 18"x 6" | Natural Gas | FPS/HBSB18 KIT | 1/2" | 60k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB18LP KIT | | | | |
| 24"x 6" | Natural Gas | FPS/HBSB24 KIT | 1/2" | 90k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB24LP KIT | | | | |
| 30"x 8" | Natural Gas | FPS/HBSB30 KIT | 1/2" | 90k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB30LP KIT | | | | |
| 36"x 8" | Natural Gas | FPS/HBSB36 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB36LP KIT | | | | |
| 48"x 10" | Natural Gas | FPS/HBSB48 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB48LP KIT | | | | |
| 60"x 10" | Natural Gas | FPS/HBSB60 KIT | 1/2" | 250k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB60LP KIT | | | | |
| 72"x 10" | Natural Gas | FPS/HBSB72 KIT | 1/2" | 300k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB72LP KIT | | | | |
| 84"x 10" | Natural Gas | FPS/HBSB84 KIT | 1/2" | 300k | 1/2" | 18" |
| | Liquid Propane | FPS/HBSB84LP KIT | | | | |




Features:

Burner Ports - Point Inward
Raised Hub Design

ROUND BURNERS- COLD ROLLED STEEL (BLACK)

| Size | Gas Type | Model | Hub Size | Btu | Valve Size | Flex Line |
|------|----------------|------------|----------|------|------------|-----------|
| 12" | Natural Gas | FP12 KIT | 1/2" | 90k | 1/2" | 18" |
| | Liquid Propane | FP12LP KIT | | | | |
| 18" | Natural Gas | FP18 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FP18LP KIT | | | | |
| 24" | Natural Gas | FP24 KIT | 1/2" | 150k | 1/2" | 18" |
| | Liquid Propane | FP24LP KIT | | | | |
| 30" | Natural Gas | FP30 KIT | 1/2" | 300k | 1/2" | 24" |
| | Liquid Propane | FP30LP KIT | | | | |
| 36" | Natural Gas | FP36 KIT | 1/2" | 300k | 1/2" | 24" |
| | Liquid Propane | FP36LP KIT | | | | |

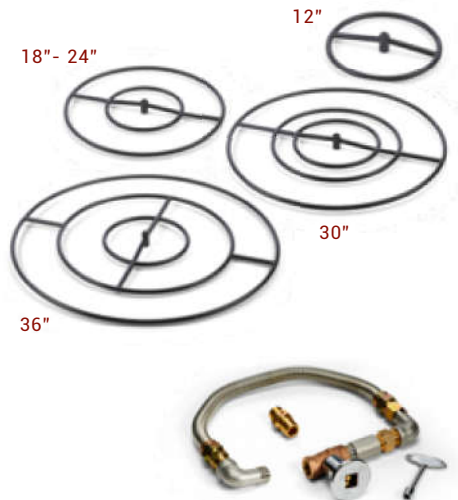

READY TO FINISH SERIES

COMPLETE FIRE PIT PACKAGES

HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.


MAP
APPLIES

READY TO FINISH


These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction - especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardiboard shell, and weigh 150 lbs.

Enclosure ships from North Carolina Warehouse on pallet; Fire Pit ships from Ohio Warehouse.

ROUND ENCLOSURE



Frame is pre-cut for FPPK or MLFPK.

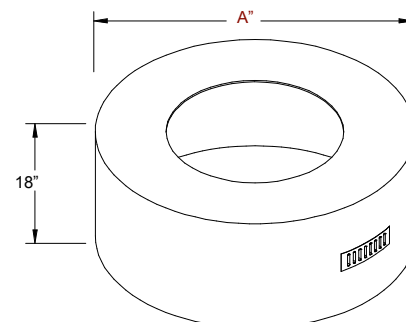

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions







FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions

Specifications



Size: 45" or 54" diameter, 18" tall
Insert: 25" Bowl Pan, 18" Penta Burner

| Ignition | Size (A") | Power | Gas type | Model | Max BTU | Insert |
|--|-----------|--------|-------------------------------|--|---------|---|
| Electronic Ignition  | 45" | 120VAC | Natural Gas Liquid Propane | U45R/25SSCEK-NG/120VAC U45R/25SSCEK-LP/120VAC | 125k |  |
| | | 24VAC | Natural Gas Liquid Propane | U45R/25SSCEK-NG/24VAC U45R/25SSCEK-LP/24VAC | | |
| | 54" | 120VAC | Natural Gas Liquid Propane | U54R/25SSCEK-NG/120VAC U54R/25SSCEK-LP/120VAC | 125k | |
| | | 24VAC | Natural Gas Liquid Propane | U54R/25SSCEK-NG/24VAC U54R/25SSCEK-LP/24VAC | | |
| Push Button- Flame Sense  | 45" | | Natural Gas Liquid Propane | U45R/FPPK25CEK-NG U45R/FPPK25CEK-LP | 90k |  |
| | 54" | | Natural Gas Liquid Propane | U54R/FPPK25CEK-NG U54R/FPPK25CEK-LP | 90k | |
| Match Lit  | 45" | | Natural Gas Liquid Propane | U45R/MLFPK25CEK-NG U45R/MLFPK25CEK-LP | 65k |  |
| | 54" | | Natural Gas Liquid Propane | U54R/MLFPK25CEK-NG U54R/MLFPK25CEK-LP | 65k | |

Pg. 12

Pg. 13

Pg. 13

READY TO FINISH SERIES (CONTINUED)

MAP
APPLIES

COMPLETE FIRE PIT PACKAGES


HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.

READY TO FINISH


These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction - especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardiboard shell, and weigh 150 lbs.

Enclosure ships from North Carolina Warehouse on pallet; Fire Pit ships from Ohio Warehouse.

OCTAGON ENCLOSURE



Frame is pre-cut for FPPK or MLFPK.



EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions







FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions



Size: 45" or 54" diameter, 18" tall
Insert: 25" Bowl Pan, 18" Penta Burner

Specifications


| Ignition | Size (A") | Power | Gas type | Model | Max BTU | Insert |
|--|-----------|----------------|-----------------------|------------------------|---------|---|
| Electronic Ignition  | 45" | 120VAC | Natural Gas | U450/25SSCEK-NG/120VAC | 125k |  |
| | | | Liquid Propane | U450/25SSCEK-LP/120VAC | | |
| | 24VAC | Natural Gas | U450/25SSCEK-NG/24VAC | 125k | | |
| | | Liquid Propane | U450/25SSCEK-LP/24VAC | | | |
| | 54" | 120VAC | Natural Gas | U540/25SSCEK-NG/120VAC | 125k | |
| | | | Liquid Propane | U540/25SSCEK-LP/120VAC | | |
| | 24VAC | Natural Gas | U540/25SSCEK-NG/24VAC | 125k | | |
| | | Liquid Propane | U540/25SSCEK-LP/24VAC | | | |
| Push Button-Flame Sense  | 45" | | Natural Gas | U450/FPPK25CEK-NG | 90k |  |
| | | | Liquid Propane | U450/FPPK25CEK-LP | | |
| | 54" | | Natural Gas | U540/FPPK25CEK-NG | 90k | |
| | | Liquid Propane | U540/FPPK25CEK-LP | | | |
| Match Lit  | 45" | | Natural Gas | U450/MLFPK25CEK-NG | 65k |  |
| | | | Liquid Propane | U450/MLFPK25CEK-LP | | |
| | 54" | | Natural Gas | U540/MLFPK25CEK-NG | 65k | |
| | | Liquid Propane | U540/MLFPK25CEK-LP | | | |




Fire features add a natural gathering spot no matter where they are installed.

Photo Courtesy of Lawn Innovations - Ohio

RECTANGLE BURNER ENCLOSURE - INTERLINK BURNER INSERT



Frame is pre-cut for FPPK or MLFPK.

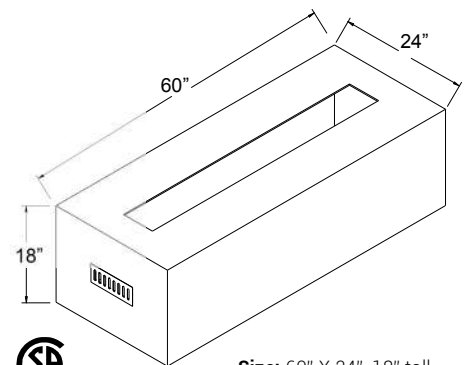







Size: 60" X 24", 18" tall
Insert: 37" X 8" or 49" X 8"

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions

FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions

Specifications

| Ignition | Insert | Power | Gas type | Model | Max BTU | Insert |
|---|-----------------|--------|-------------------------------|--|---------|---|
| Electronic Ignition  | 37" X 8" | 120VAC | Natural Gas Liquid Propane | U60X24/37X8CEK-NG/120VAC U60X24/37X8CEK-LP/120VAC | 75k |  Pg. 26 |
| | | 24VAC | Natural Gas Liquid Propane | U60X24/37X8CEK-NG/24VAC U60X24/37X8CEK-LP/24VAC | | |
| | 49" X 8" | 120VAC | Natural Gas Liquid Propane | U60X24/49X8CEK-NG/120VAC U60X24/49X8CEK-LP/120VAC | 100k | |
| | | 24VAC | Natural Gas Liquid Propane | U60X24/49X8CEK-NG/24VAC U60X24/49X8CEK-LP/24VAC | | |
| Push Button-Flame Sense  | 37" X 8" | | Natural Gas Liquid Propane | U60X24/37X8FPPKCEK-NG U60X24/37X8FPPKCEK-LP | 75k |  Pg. 27 |
| | 49" X 8" | | Natural Gas Liquid Propane | U60X24/49X8FPPKCEK-NG U60X24/49X8FPPKCEK-LP | 90k | |
| Match Lit  | 37" X 8" | | Natural Gas Liquid Propane | U60X24/37X8MLFPKCEK-NG U60X24/37X8MLFPKCEK-LP | 65k |  Pg. 27 |
| | 49" X 8" | | Natural Gas Liquid Propane | U60X24/49X8MLFPKCEK-NG U60X24/49X8MLFPKCEK-LP | 65k | |

READY TO FINISH SERIES (CONTINUED)

COMPLETE FIRE PIT PACKAGES

HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.


MAP
APPLIES

READY TO FINISH


These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction - especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardiboard shell, and weigh 150 lbs.

Enclosure ships from North Carolina Warehouse on pallet; Fire Pit ships from Ohio Warehouse.

RECTANGLE BURNER ENCLOSURE - TROUGH BURNER INSERT



Frame is pre-cut for FPPK or MLFPK.

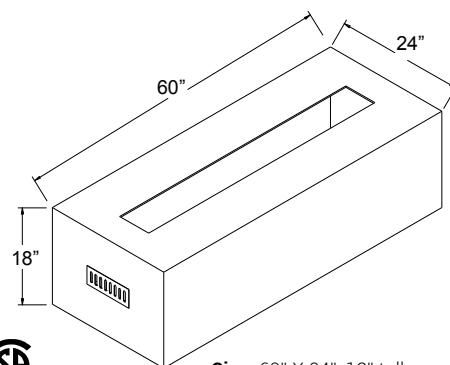

Size: 60" X 24", 18" tall
Insert: 36" or 48" Trough







EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions

FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions



Specifications


| Ignition | Insert | Power | Gas type | Model | Max BTU | Insert |
|---|-------------------|--------|----------------|------------------------|---------|--|
| Electronic Ignition  | 36" Trough | 120VAC | Natural Gas | U60X24/36CEK-NG/120VAC | 75k |  <i>Pg. 24</i> |
| | | | Liquid Propane | U60X24/36CEK-LP/120VAC | | |
| | 48" Trough | 24VAC | Natural Gas | U60X24/36CEK-NG/24VAC | 100k | |
| | | | Liquid Propane | U60X24/36CEK-LP/24VAC | | |
| Push Button-Flame Sense  | 36" Trough | | Natural Gas | U60X24/36FPPKCEK-NG | 75k |  <i>Pg. 25</i> |
| | | | Liquid Propane | U60X24/36FPPKCEK-LP | | |
| | 48" Trough | | Natural Gas | U60X24/48FPPKCEK-NG | 90k | |
| | | | Liquid Propane | U60X24/48FPPKCEK-LP | | |
| Match Lit  | 36" Trough | | Natural Gas | U60X24/36MLFPKCEK-NG | 65k |  <i>Pg. 25</i> |
| | | | Liquid Propane | U60X24/36MLFPKCEK-LP | | |
| | 48" Trough | | Natural Gas | U60X24/48MLFPKCEK-NG | 65k | |
| | | | Liquid Propane | U60X24/48MLFPKCEK-LP | | |




The finished enclosure
in this beautiful backyard
escape is guaranteed to take
your breath away.

Photo Courtesy of McHale &
Koepke - Ohio

RECTANGLE BURNER ENCLOSURE - H-BURNER INSERT



Frame is pre-cut for
FPPK or MLFPK.

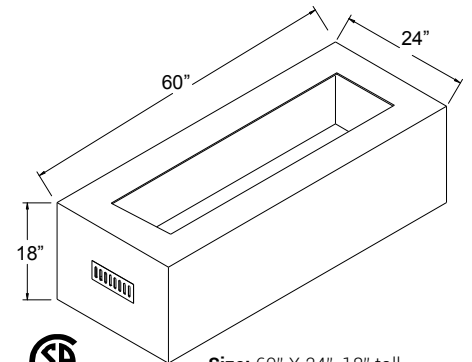







Size: 60" X 24", 18" tall
Insert: 30" X 12" or 36" X 14"

EI Models Include: Enclosure,
Fully Assembled Insert, Input
Flex Line and Instructions

FPPK Models Include:
Enclosure, Fully Assembled
Insert, Mounting Sleeve and
Instructions

MLFPK Models Include:
Enclosure, Fully Assembled
Insert and Instructions

Specifications

| Ignition | Insert | Power | Gas type | Model | Max BTU | Insert |
|--|------------------|--------|-------------------------------|--|---------|---|
| Electronic Ignition  | 30" X 12" | 120VAC | Natural Gas Liquid Propane | U60X24/30X12CEK-NG/120VAC U60X24/30X12CEK-LP/120VAC | 100k |  Pg. 20 |
| | | 24VAC | Natural Gas Liquid Propane | U60X24/30X12CEK-NG/24VAC U60X24/30X12CEK-LP/24VAC | | |
| | 36" X 14" | 120VAC | Natural Gas Liquid Propane | U60X24/36X14CEK-NG/120VAC U60X24/36X14CEK-LP/120VAC | 125k | |
| | | 24VAC | Natural Gas Liquid Propane | U60X24/36X14CEK-NG/24VAC U60X24/36X14CEK-LP/24VAC | | |
| Push Button- Flame Sense  | 30" X 12" | | Natural Gas Liquid Propane | U60X24/30X12FPPKCEK-NG U60X24/30X12FPPKCEK-LP | 90k |  Pg. 21 |
| | 36" X 14" | | Natural Gas Liquid Propane | U60X24/36X14FPPKCEK-NG U60X24/36X14FPPKCEK-LP | 90k | |
| Match Lit  | 30" X 12" | | Natural Gas Liquid Propane | U60X24/30X12MLFPKCEK-NG U60X24/30X12MLFPKCEK-LP | 65k |  Pg. 21 |
| | 36" X 14" | | Natural Gas Liquid Propane | U60X24/36X14MLFPKCEK-NG U60X24/36X14MLFPKCEK-LP | 65k | |


READY TO FINISH SERIES *(CONTINUED)*

MAP
APPLIES



COMPLETE FIRE PIT PACKAGES

HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.

RECTANGLE BURNER ENCLOSURE - S-FIRE BURNER INSERT



Frame is pre-cut for
FPPK or MLFPK.

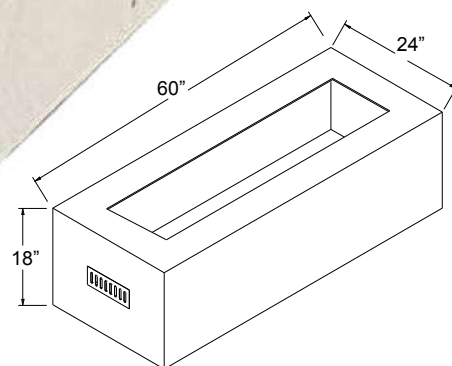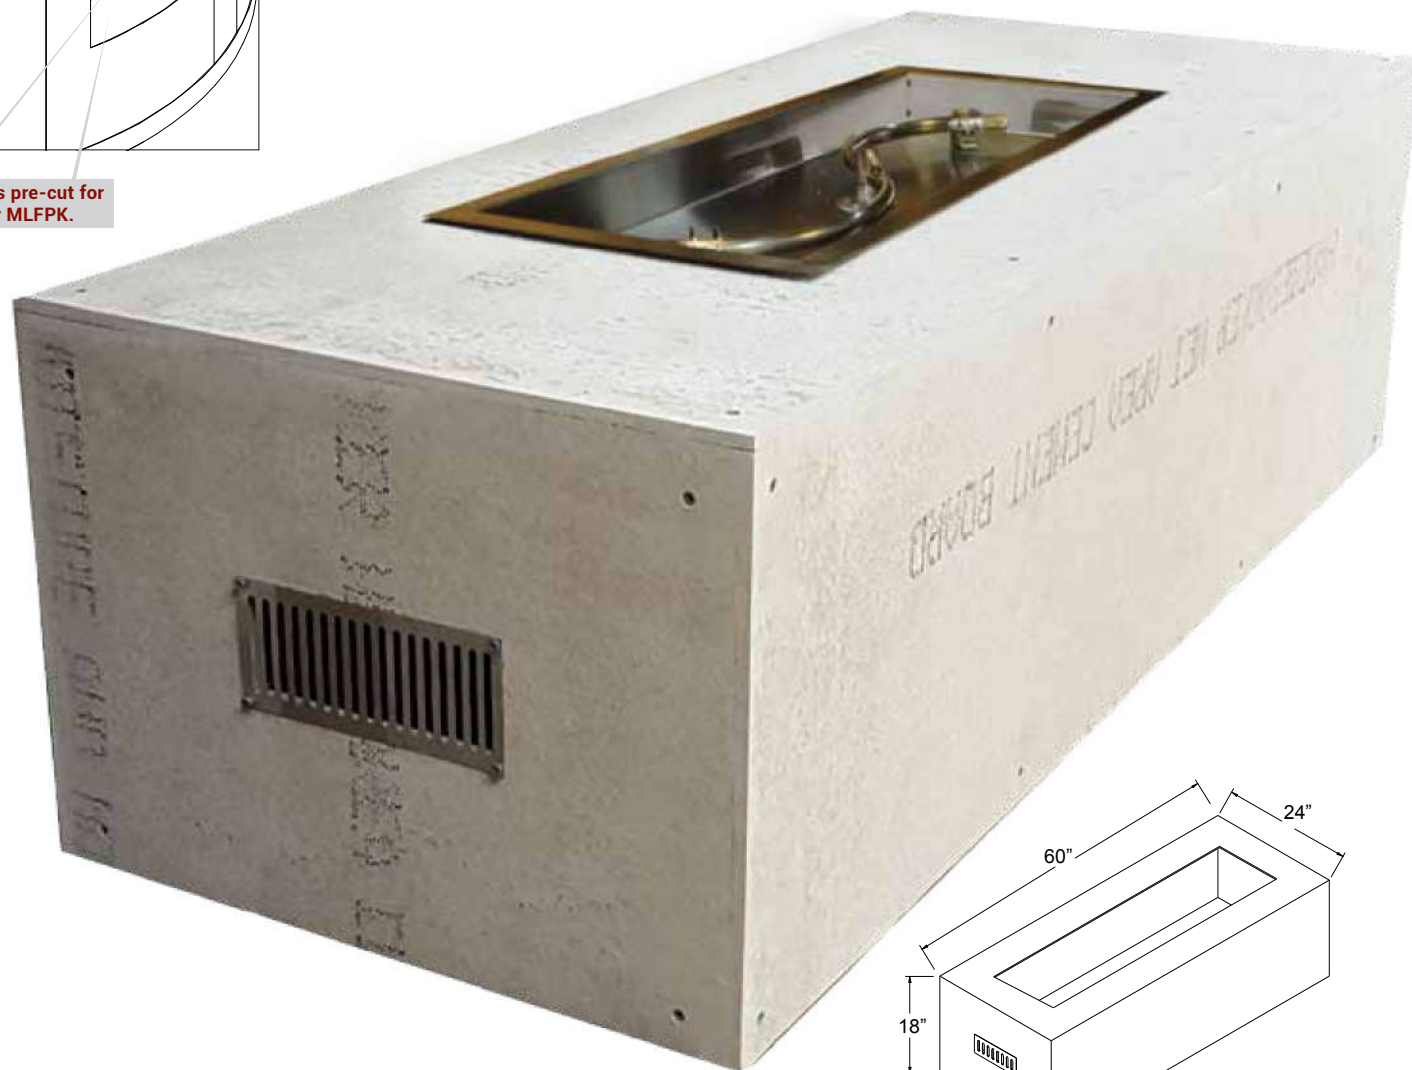

EI Models Include: Enclosure,
Fully Assembled Insert, Input
Flex Line and Instructions







FPPK Models Include:
Enclosure, Fully Assembled
Insert, Mounting Sleeve and
Instructions

MLFPK Models Include:
Enclosure, Fully Assembled
Insert and Instructions



Size: 60" X 24", 18" tall
Insert: 36" X 14"

Specifications


| Ignition | Size | Power | Gas type | Model | Max BTU | Insert |
|---|------------------|--------|----------------|---------------------------|---------|---|
| Electronic Ignition  | 60x24x18" | 120VAC | Natural Gas | U60X24/SFIRECEK-NG/120VAC | 75k |  <p>Pg. 22</p> |
| | | 24VAC | Natural Gas | U60X24/SFIRECEK-NG/24VAC | | |
| Push Button  | 60x24x18" | | Natural Gas | U60X24/SFIREFPPKCEK-NG | 75k |  <p>Pg. 23</p> |
| | | | Liquid Propane | U60X24/SFIREFPPKCEK-LP | | |
| Match Lit  | 60x24x18" | | Natural Gas | U60X24/SFIREMLFPKCEK-NG | 65k |  <p>Pg. 23</p> |
| | | | Liquid Propane | U60X24/SFIREMLFPKCEK-LP | | |




This Enclosure turns this
hotels backyard patio
into an outdoor room
and relaxation spot.

Photo Courtesy of Pridemark
Residential - Arizona

SQUARE BURNER ENCLOSURE



Frame is pre-cut for
FPPK or MLFPK.

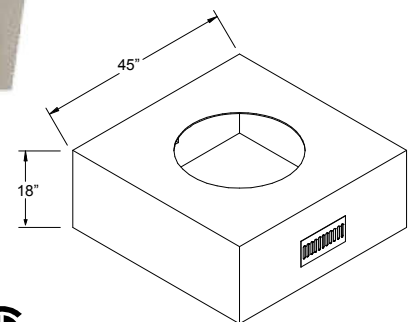







EI Models Include: Enclosure,
Fully Assembled Insert, Input
Flex Line and Instructions

FPPK Models Include:
Enclosure, Fully Assembled
Insert, Mounting Sleeve and
Instructions

MLFPK Models Include:
Enclosure, Fully Assembled
Insert and Instructions

Specifications

| Ignition | Size (A") | Power | Gas type | Model | Max BTU | Insert |
|--|-----------|--------|-------------------------------|--|---------|--|
| Electronic Ignition  | 45" | 120VAC | Natural Gas Liquid Propane | U45S/25SSCEK-NG/120VAC U45S/25SSCEK-LP/120VAC | 125k |  Pg. 12 |
| | | 24VAC | Natural Gas Liquid Propane | U45S/25SSCEK-NG/24VAC U45S/25SSCEK-LP/24VAC | | |
| Push Button  | 45" | | Natural Gas Liquid Propane | U45S/FPPK25CEK-NG U45S/FPPK25CEK-LP | 90k |  Pg. 13 |
| Match Lit  | 45" | | Natural Gas Liquid Propane | U45S/MLFPK25CEK-NG U45S/MLFPK25CEK-LP | 65k |  Pg. 13 |



Size: 45" X 45", 18" tall
Insert: 25" Bowl Pan, 18" Penta Burner



Need help? Use our fire pit selector at hpcfire.com

COPPER BOWL SERIES

COMPLETE FIRE PIT PACKAGES

The HPC Copper Bowl Series is available in the Fire Bowl or the Pool Side Fire & Water Bowl models. Both versions are fitted with a CSA Certified match lit (MLFPK) or remote electronic ignition (EI) fire pit insert and are available with both Liquid Propane and Natural Gas. These come in an oil rubbed look with either a hammered finish or a smooth finish, based on model. The Pool Side Fire & Water Bowls utilize 1" FIP fitting for pool pump connection.

SHIPPING: Both bowl and fire pit insert ship from Ohio warehouse - crate on pallet.



Mesa Fire Bowl



Mesa Fire & Water Bowl



MESA MODELS - HAMMERED

This round hammered bowl has an oil-rubbed look. Includes Access Door.



Size: 32" diameter, 15" tall, 15" base
Burner: 12" Penta **Pan:** 18" Flat

Specifications

| Ignition | Bowl Type | Power | Gas type | Models | Max BTU |
|---|--------------|--------|----------------|---------------------|---------|
| Electronic Ignition  | Fire | 120vac | Natural Gas | MESA32-EI-NG/120VAC | 50k |
| | | | Liquid Propane | MESA32-EI-LP/120VAC | |
| | Fire | 24vac | Natural Gas | MESA32-EI-NG/24VAC | 50k |
| | | | Liquid Propane | MESA32-EI-LP/24VAC | |
| | Fire & Water | 24vac | Natural Gas | MESA32W-EI-NG/24VAC | 50k |
| | | | Liquid Propane | MESA32W-EI-LP/24VAC | |
| Match Lit  | Fire | | Natural Gas | MESA32-MLFPK-NG | 50k |
| | | | Liquid Propane | MESA32-MLFPK-LP | |
| | Fire & Water | | Natural Gas | MESA32W-MLFPK-NG | 50k |
| | | | Liquid Propane | MESA32W-MLFPK-LP | |

SIERRA MODELS - SMOOTH

This square smooth bowl has an oil-rubbed look. Includes Access Door.



Sierra Fire Bowl





Sierra Fire & Water Bowl



Size: 36" x 36", 16" tall, 18" x 18" base
Burner: 12" Penta
Pan: 19" Bowl

Specifications

| Ignition | Bowl Type | Power | Gas type | Models | Max BTU |
|---|--------------|--------|----------------|---------------------|---------|
| Electronic Ignition  | Fire | 120vac | Natural Gas | SIER36-EI-NG/120VAC | 50k |
| | | | Liquid Propane | SIER36-EI-LP/120VAC | |
| | Fire | 24vac | Natural Gas | SIER36-EI-NG/24VAC | 50k |
| | | | Liquid Propane | SIER36-EI-LP/24VAC | |
| | Fire & Water | 24vac | Natural Gas | SIER36W-EI-NG/24VAC | 50k |
| | | | Liquid Propane | SIER36W-EI-LP/24VAC | |
| Match Lit  | Fire | | Natural Gas | SIER36-MLFPK-NG | 50k |
| | | | Liquid Propane | SIER36-MLFPK-LP | |
| | Fire & Water | | Natural Gas | SIER36W-MLFPK-NG | 50k |
| | | | Liquid Propane | SIER36W-MLFPK-LP | |




SEDONA MODELS - HAMMERED

This square hammered bowl has an oil rubbed look.
Includes Access Door.

Sedona Fire Bowl

Sedona Fire & Water Bowl

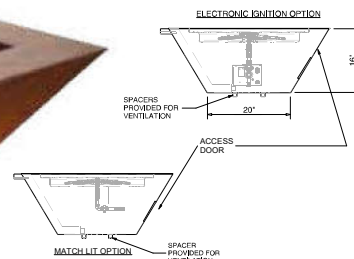


Size: 40" x 40", 16" tall, 20" x 20" base
Burner: 18" Penta **Pan:** 25" Bowl

Specifications

| Ignition | Bowl Type | Power | Gas type | Models | Max BTU |
|----------|--------------|--------|----------------|---------------------|---------|
| | Fire | 120vac | Natural Gas | SEDO40-EI-NG/120VAC | 100k |
| | | | Liquid Propane | SEDO40-EI-LP/120VAC | |
| | Fire | 24vac | Natural Gas | SEDO40-EI-NG/24VAC | 100k |
| | | | Liquid Propane | SEDO40-EI-LP/24VAC | |
| | Fire & Water | 24vac | Natural Gas | SEDO40W-EI-NG/24VAC | 100k |
| | | | Liquid Propane | SEDO40W-EI-LP/24VAC | |
| | Fire | | Natural Gas | SEDO40-MLFPK-NG | 65k |
| | | | Liquid Propane | SEDO40-MLFPK-LP | |
| | Fire & Water | | Natural Gas | SEDO40W-MLFPK-NG | 65k |
| | | | Liquid Propane | SEDO40W-MLFPK-LP | |

TEMPE MODELS - HAMMERED

This round hammered bowl has an oil rubbed look.
Controls sit below bowl.

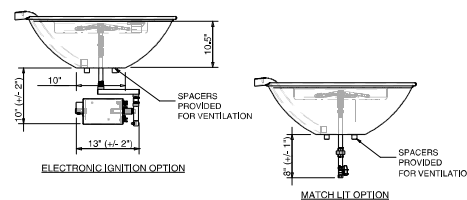

Tempe Fire Bowl

Tempe Fire & Water Bowl

Tempe - Controls below bowl

Size: 31" diameter, 10.5" tall, 10" base
Burner: 12" Penta **Pan:** 19" Bowl

Specifications

| Ignition | Bowl Type | Power | Gas type | Models | Max BTU |
|----------|--------------|--------|----------------|---------------------|---------|
| | Fire | 120vac | Natural Gas | TEMP31-EI-NG/120VAC | 50k |
| | | | Liquid Propane | TEMP31-EI-LP/120VAC | |
| | Fire | 24vac | Natural Gas | TEMP31-EI-NG/24VAC | 50k |
| | | | Liquid Propane | TEMP31-EI-LP/24VAC | |
| | Fire & Water | 24vac | Natural Gas | TEMP31W-EI-NG/24VAC | 50k |
| | | | Liquid Propane | TEMP31W-EI-LP/24VAC | |
| | Fire | | Natural Gas | TEMP31-MLFPK-NG | 50k |
| | | | Liquid Propane | TEMP31-MLFPK-LP | |
| | Fire & Water | | Natural Gas | TEMP31W-MLFPK-NG | 50k |
| | | | Liquid Propane | TEMP31W-MLFPK-LP | |



COPPER BOWL SERIES *(CONTINUED)*

COMPLETE FIRE PIT PACKAGES




The HPC Phoenix Copper Bowl model is available in Fire Bowl models only. All three versions are fitted with a CSA Certified match lit (MLFPK), push button flame sensing (FPPK) or remote electronic ignition (EI) fire pit insert and are available with either Liquid Propane or Natural Gas. These come in an oil rubbed, hand hammered finish that is a beautiful work of art.

SHIPPING: Both bowl and fire pit insert ship from Ohio warehouse - crate on pallet.




PHOENIX H-BURNER SPECIFICATIONS

Size: 47" Length, 25" Width, 18" tall, 13" base
Burner: 30" H-Burner **Pan:** 36" x 14"

| Ignition | Bowl Type | Power | Gas type | Models | Max BTU |
|---|-----------|--------|-------------------------------|--|---------|
| Electronic Ignition  | Fire | 120vac | Natural Gas Liquid Propane | PHOEN47X25/HBURN-EI-NG/120VAC PHOEN47X25/HBURN-EI-LP/120VAC | 100k |
| Push Button Flame Sense  | Fire | | Natural Gas Liquid Propane | PHOEN47X25/HBURN-FPPK-NG PHOEN47X25/HBURN-FPPK-LP | 90k |
| Match Lit  | Fire | | Natural Gas Liquid Propane | PHOEN47X25/HBURN-MLFPK-NG PHOEN47X25/HBURN-MLFPK-LP | 65k |




PHOENIX MODELS - HAMMERED

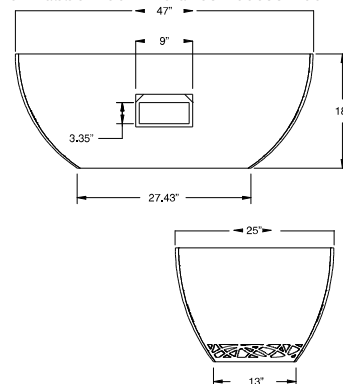This hammered bowl has an oil-rubbed look. Includes Access Door.






PHOENIX S-FIRE SPECIFICATIONS

Size: 47" Length, 25" Width, 18" tall, 13" base
Burner: 30" S-Fire **Pan:** 36" x 14"

| Ignition | Bowl Type | Power | Gas type | Models | Max BTU |
|---|-----------|--------|-------------------------------|--|---------|
| Electronic Ignition  | Fire | 120vac | Natural Gas Liquid Propane | PHOEN47X25/SFIRE-EI-NG/120VAC PHOEN47X25/SFIRE-EI-LP/120VAC | 75k |
| Push Button Flame Sense  | Fire | | Natural Gas Liquid Propane | PHOEN47X25/SFIRE-FPPK-NG PHOEN47X25/SFIRE-FPPK-LP | 75k |
| Match Lit  | Fire | | Natural Gas Liquid Propane | PHOEN47X25/SFIRE-MLFPK-NG PHOEN47X25/SFIRE-MLFPK-LP | 65k |

PHOENIX TROUGH SPECIFICATIONS

Size: 47" Length, 25" Width, 18" tall, 13" base
Burner: 36" Linear Burner Trough **Pan:** 36" Trough

| Ignition | Bowl Type | Power | Gas type | Models | Max BTU |
|---|-----------|--------|-------------------------------|--|---------|
| Electronic Ignition  | Fire | 120vac | Natural Gas Liquid Propane | PHOEN47X25/TRGH-EI-NG/120VAC PHOEN47X25/TRGH-EI-LP/120VAC | 75k |
| Push Button Flame Sense  | Fire | | Natural Gas Liquid Propane | PHOEN47X25/TRGH-FPPK-NG PHOEN47X25/TRGH-FPPK-LP | 75k |
| Match Lit  | Fire | | Natural Gas Liquid Propane | PHOEN47X25/TRGH-MLFPK-NG PHOEN47X25/TRGH-MLFPK-LP | 65k |

Access Door - all models



Convenience Feature -
 Magnetic Access Door for the Push Button Flame Sense (FPPK) and Match Lit (MLFPK) models.

WATER FEATURE INSERTS

EVOLUTION 360 - H2Onfire

Perfect for any residential or commercial setting, these innovative fire and water effects add the sound of soothing water and beautiful blue LED lights to the warmth and romance of fire. They arrive fully assembled with a self-contained filtrated water system and wall switch control of fire, water, and lights. Just level the basin and connect the water, electric, and gas.

These features can be installed on practically any patio in a residential or commercial setting - no pond or pool needed! This fully assembled, plug-n-play system comes ready to install - simply level the water pit then connect water, electric, and gas. Finally, enclose with stone, veneer, stucco, etc. to match your patio décor. Operation is even simpler - three switches control the water, LED lights, and fire pit. The Evolution 360 is made of durable, weather resistant, black polyethylene and engineered to last - no on-site guesswork. **Ships in crate on pallet.**



MAP
APPLIES

EVOLUTION 360 AND H2Onfire FEATURES



Swim World Pools - TN ▲

▼ IBS Show Las Vegas



Beautiful LED Lighting



Low Level Sensor



Auto-fill - Overflow



Water Filter



Flow Control Valve



Control Box



H2Onfire Model

Features:

- Beautiful blue LED lights** to illuminate water - hidden under scupper.
- Auto fill system** - automatically adds water when needed; Low level sensor protects pump if water supply issue
- Filtration** - water is conditioned with a reusable, easy-to-clean filter
- Water pump** -2,400 to 4,800 gallons per-hour depending on model

Leveling / Height Setting - four heavy, 3/4" threaded feet give flexibility of height adjustment and leveling. Easily adjusted on site with ~4" of travel

Overflow feature - allows water to escape safely

Electrical Connection - simply with a 5-lead, 10' cable ready to connect. Control Panel incorporates 3 push-to-reset breakers for water, LEDs & fire

EVOLUTION 360 AND H2Onfire INFORMATION

Basin Dimensions

- Outside Diameter:** 52"
- Overall Height:** 26" - 30"
- Basin:** 14"-18" with Adjustable Side Wall Height
- Tower:** 10" Diameter Flange to Mount Centerpiece

Basin Weight

- 125 lbs Dry, 532 lbs Wet

Additional Load

- Basin floor:** 200 lbs max
- Tower:** 100 lbs max

Water

- Softened tap water only** - Minor conditioning needed
- Capacity:** Unit holds 50 Gallons (less with Water Rock)
- Water Pump:** 3,200gph Standard (higher rates available)

Power

- 120VAC - Control via panel or from remote location.



Need help? Use our fire pit selector at hpcfire.com

EVOLUTION 360 - FIRE AND WATER INSERTS MAP

HPC'S AWARD WINNING - VERY POPULAR FIRE AND WATER ELEMENT APPLIES

These insert's have many unique and user friendly features that make it a year round water and fire pit. We have made these inserts so the fire, water and lighting features will work independently of each other making it an ideal insert in areas that need to winterize the water feature but still enjoy their landscape.

HAMMERED COPPER FIRE BOWL

Hammered Copper - 4 Scupper



Four Scupper Feature




Hammered Copper - 360

360 Feature



360 Feature being finished with paver stone

Includes Basin, 26" Copper Water Bowl, and Electronic Ignition Fire Pit (13SSEI).

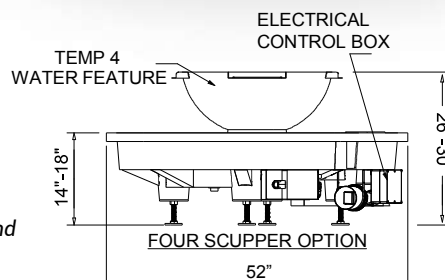

Winner of two Vesta Awards for Product Innovation and Design

Size: 52" diameter, 14"-18" tall
Burner: 12" Round

Specifications - Electronic Ignition

| Bowl Type | Power | Gas type | Models (EI) | Max BTU |
|-----------|--------|-------------------------------|--|---------|
| 4 Scupper | 120vac | Natural Gas Liquid Propane | WB52R-TEMP4-EI-NG WB52R-TEMP4-EI-LP | 90k |
| 360 | 120vac | Natural Gas Liquid Propane | WB52R-TEMP360-EI-NG WB52R-TEMP360-EI-LP | 90k |



H2Onfire - FIRE ON WATER INSERTS


MAP
APPLIES

HPC'S AWARD WINNING - VERY POPULAR FIRE AND WATER ELEMENT

HPC is proud to announce another first in the industry as well as adding a new element to the water feature insert series, the H2Onfire fire on water feature. This insert has been a longtime request of our dealers (and the consumer). A true electronic fire on water, turn-key appliance operating at a gas pressure less than 1/4 psi, allowing for residential installations. It is also the first "fire on water" system to be certified in North America to the Z21.97 standard by the CSA Group - passing the stringent wind, rain, and combustion test.

The fire ring is totally submerged underwater using our patent pending burner design and back flow prevention to protect the controls - giving an even and very appealing flame at only 65,000 Btu. This is NOT a match lit system- it is remote control with auto relight. Our ignition and flame sensing network is located in the center tower monitoring flame conditions at all times.
Ships in crate on pallet.

CONCRETE FIRE ON WATER AND HAMMERED COPPER 360

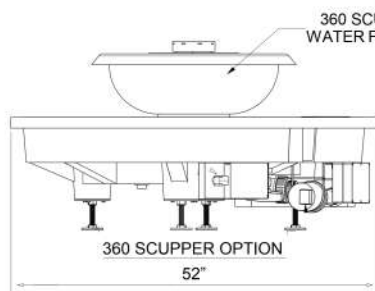

Evolution 360/H2Onfire Enclosure Features:

Made of lightweight aluminum
74" O.D.
Modular 3 section construction. Bolts together and is easy to lift.
Adjustable leveling feet
Lockable access door
Color: Copper vein with flat black.
Powder coated. Additional colors coming soon!



WPE-72ROUND-TB/CV



578-G4
Optional Remote
Available



Winner of Vesta
Awards Finalist

Specifications - Electronic Ignition

Size: 52" diameter, 14"-18" tall
Burner: Underwater

| Color | Bowl Type | Power | Gas type | Models | Max BTU |
|-----------------------|-----------|--------|----------------|------------------------|---------|
| Concrete Burnt Sienna | 4 Scupper | 120vac | Natural Gas | FOW52R-MONACO4BS-EI-NG | 65k |
| | | | Liquid Propane | FOW52R-MONACO4BS-EI-LP | |
| Concrete Black | 4 Scupper | 120vac | Natural Gas | FOW52R-MONACO4BL-EI-NG | 65k |
| | | | Liquid Propane | FOW52R-MONACO4BL-EI-LP | |
| Copper - Hammered | 360 | 120vac | Natural Gas | FOW52R-CYPRUS360-EI-NG | 65k |
| | | | Liquid Propane | FOW52R-CYPRUS360-EI-LP | |

Need help? Use our fire pit selector at hpcfire.com

Match proper accessories to your
fire pit model - see Pg. 67-70.

TK TORCH KITS

BACKYARD FIRE EFFECTS THAT WILL WOW ANYONE

Now your backyard can have that resort feeling. How nice it is to have instant "tiki" style fire at your finger tips. No more picking up fuel; No more filling with messy oils or gel. These torches are state of the art, very robust, reliable, and built to last.

MAP
APPLIES

TK TORCH KITS: MATCH LIT



FPC-TK TORCH (Optional)
TK Torch Cover w/Elastic Hem (3.5" Top
Dia x 9.5" Bottom Dia. x 14" Height)




940-POSTMOUNT (Optional)
TK Torch Post Mount



Black Aluminum



Hammered Copper



Flame Height Control Knob

Size: 84" Tall (with 12" underground)
Burner: TK

Specifications - Match Lit

| Style | Style | Gas type | Models | Max BTU |
|--------|------------------------|----------------|------------------|---------|
| Black | Complete with 96" Post | Natural Gas | TK40MAN-B-NG | 25k |
| | | Liquid Propane | TK40MAN-B-LP | |
| | Tiki Top Only | Natural Gas | TKHEAD40MAN-B-NG | |
| | | Liquid Propane | TKHEAD40MAN-B-LP | |
| Copper | Complete with 96" Post | Natural Gas | TK40MAN-C-NG | 25k |
| | | Liquid Propane | TK40MAN-C-LP | |
| | Tiki Top Only | Natural Gas | TKHEAD40MAN-C-NG | |
| | | Liquid Propane | TKHEAD40MAN-C-LP | |

Accessories

| Model | Description |
|---------------|------------------------------|
| 580-TIKI | 8' Hose |
| 940-POST | 84" Black Powder Coated Post |
| FPC-TK TORCH | Vinyl Cover for Torch Head |
| 940-POSTMOUNT | TK Torch Post Mount |

Features:

Burner assembly made of rugged #304 stainless steel for durability.
Outdoor powder coated post.
Built for Natural Gas or LP.
3-year warranty on hardware; 1-year warranty on gas controls.
Kano tops available in 2 styles: Hammered Copper or Black Finish
Available Head Only assembly for column mounting.

FIRE PIT ACCESSORIES

EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

GLASS WIND GUARDS

HPC provides a high quality glass wind guard specially designed to complement as well as provide additional safety for HPC fire pit inserts of all shapes- round, square, rectangle and linear. These feature a durable tempered glass construction to ensure a long lasting, heat resistant product. Wind guards reduce flame disturbance of your fire pit and prevents loose items from getting too close to the flames.

Features:

Tempered Glass - Heavy duty 3/16" clear glass is tempered to improve durability and allow it to withstand high temperatures. Depending on wind guard size- 4 or 6 sections complete the desired shape.

Brackets- Polished aluminum brackets and plastic support feet provided.

Specifications

| Shape | Size | Model | Height |
|-----------|--------|--------------------|--------|
| Round | 23" | WG23-RD | 6" |
| | 30" | WG30-RD | |
| | 38" | WG38-RD (6 Pieces) | |
| | 48" | WG48-RD (6 Pieces) | |
| Square | 25x25" | WG25-SQ | 6" |
| | 31x31" | WG31-SQ | |
| | 37x37" | WG37-SQ | |
| | 43x43" | WG43-SQ | |
| | 49x49" | WG49-SQ | |
| Rectangle | 31x19" | WG31X19-RECT | 6" |
| | 37x19" | WG37X19-RECT | |
| | 43x21" | WG43X21-RECT | |
| | 49x21" | WG49X21-RECT | |
| | 61x23" | WG61X23-RECT | |
| Linear | 31X15" | WG31X15-L | 6" |
| | 43X15" | WG43X15-L | |
| | 55X15" | WG55X15-L | |
| | 67X15" | WG67X15-L | |



Round Wind Guard



Square Wind Guard

Rectangle Wind Guard

Linear Wind Guard

WIND GUARD REPLACEMENT CLIPS

Replacement clips for HPC Wind Guards (one clip per pack). Please note if needing a bottom clip, will need rubber foot, also found below.

| Model | Description |
|---------------|---|
| WG-CC-RD | Replacement chrome clip for round wind guards |
| WG-CC-SQ/RECT | Replacement Chrome Corner Clip For Square & Rectangle Wind Guards |

WIND GUARD REPLACEMENT RUBBER FEET

Replacement rubber feet for HPC Wind Guards (one foot per pack).

| Model | Description |
|------------------------|--|
| WG-RUBBER FOOT-RD | Replacement rubber foot for round wind guards |
| WG-RUBBER FOOT-SQ/RECT | Replacement rubber foot for square & rectangle wind guards |



WG-SC

WG-RUBBER FOOT-SQ/RECT

WG-CC-SQ/RECT

WG-EGS

WIND GUARD EXTENSION KIT AND PARTS

The WG-EXT/STR KIT allows you to combine rectangle, linear and square HPC wind guards.

| Model | Description |
|----------------|---|
| WG-EXT/STR KIT | Complete Kit - 4 Extension chrome straight clips and 4 extension glass supports with rubber foot |
| WG-SC | Replacement extension chrome straight clip for square & linear wind guards-used for extending lengths on glass panels |
| WG-EGS | Replacement extension glass support with rubber foot |

WG-EXT/STR KIT



WG-EXT/STR KIT installed

FIRE PIT ACCESSORIES (CONTINUED)

EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

INSTALLATION COLLARS

FLEXIBLE INSTALL COLLAR - INCLUDES 2 PER CARTON

The flexible install collar merges the gap between the fire pit structure and the insert pan for easy installation and auto centering featured with a curved lip. This flexible install collar allows for an easy 3 step installation saving you time with our one size fits all product. The collar can be formed to fit any shaped fire pit.



Place the collar



Install the collar



Install the insert



Available
June 2018

| Model | Size (1) | Includes |
|-----------|----------|--------------|
| IC44SS-FF | 44x6.2" | 2 per carton |

SOLID INSTALL COLLAR - FOR BOWL PANS

Fire pit installation can be made easier with our installation collar, of an appropriate size, mortared in just below the top course of the enclosure. The collars make the pan and valve box easy to access.

The ID and OD of the installation collars differ by 6" to allow a small space between the side of the pan and the collar as well as 1" or more of the collar to project into the body of the enclosure and be mortared in if desired. The collar should be installed into the enclosure while it is being built. Collar should be 2" to 4" below the top of the enclosure.



| Model | Size | ID | OD |
|----------|--------------|-------|-------|
| IC19GALV | 19" Pan Size | 20" | 26" |
| IC25GALV | 25" Pan Size | 26" | 32" |
| IC31GALV | 31" Pan Size | 32" | 38" |
| IC37GALV | 37" Pan Size | 38" | 44" |
| IC43GALV | 43" Pan Size | 43.5" | 49.5" |

CERAMIC RIVER ROCK SERIES

Looking for something other than lava rock or glass? HPC has a third option for media over your outdoor (or indoor) burner, our River Rock Series. These imitation stones are lightweight ceramic fiber, gel cast and designed to take on the outdoor elements. Each set comes with an 84 piece assortment of large and small stones (large pieces are 4 1/2", small pieces are 2 1/2"). One set is 1/2 cubic foot (15 lbs). Available in two styles — black or multi color (light and dark brown, gray, and black)

| Model | Color | Size |
|---------|------------|------------------|
| FPR84MC | Multicolor | 2.5" - 4.5" Size |
| FPR84BL | Black | 2.5" - 4.5" Size |



Multicolor



Black

FIRE PIT MEDIA - LAVA ROCK AND CERAMIC FIBER

LAVA ROCK



Time tested, Lava Rock is proven to increase combustion efficiency while maintaining a classy look for any fire pit. The size of each piece of rock varies from 1" to 2". Lava rock is sold in 1/2 cubic foot increments. Serves as an excellent base for our specially designed outdoor logs.

| Model | Size |
|-------|------------|
| 657 | 1"-2" Size |

ROLLED LAVA STONE



Unique finish lava stone rolled smooth. Available in 1/2 cubic foot bags.

| Color | Model | Size |
|-------|-------|----------------|
| Black | 857S | 1"-2" Size |
| | 857M | 2.5"-4.5" Size |
| Red | 858S | 1"-2" Size |
| | 858M | 2.5"-4.5" Size |

FIRE PIT MEDIA - DECORATIVE GLASS


HPC has 28 colors to choose from - The glass shown- is 1/4" except for those indicating "5" (1/2")



FPGLYELLOW



FPGLBLACK



FPGLBLACKREFL



FPGLBRONZE



FPGLBRNZREFL



FPGLBRONZE5




FPGLCHMPINK



FPGLCLEAR



FPGLCLEAR5



FPGLCOBALTBLUE



FPGLCOPPER



FPGLEVERGREEN



FPGLEVGRNREFL



FPGLGOLDREFL



FPGLGRAY



FPGLGRAY.5



FPGLGRAYREFLEC



FPGLLIGHTGREEN



FPGLORANGE



FPGLPACIFICBLUE



FPGLPACBLUEREFL



FPGLPLATINUM



FPGLPURPLE



FPGLRED



FPGLSOLEX



FPGLSTARFIRE



FPGLSTRFIRE5



FPGLTURQUOISE

Sold in 10 lb increments (Priced per pound)

Note: Glass Orders drop shipped separately from California.

NEED HELP? CHECK OUT OUR GLASS CALCULATOR AT HPCFIRE.COM!



Need help? Use our fire pit selector at hpcfire.com

FIRE PIT ACCESSORIES (CONTINUED)

EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

OUTDOOR LOGS

Designed specifically for the outdoors, these are sure to enhance the flame in your fire pit. Being ceramic fiber, they develop a glow where the flame is the hottest. These are available in four models, Woodland, Campfire, Western Pine and Linear Birch in 2, 4, 5, 6 and 8 piece sets depending on the size.

Specifications

| Style | Model | Piece | Piece Length |
|----------|----------|-------|--------------|
| Woodland | FPL12W4 | 4 | 9"-10" |
| | FPL17W4 | 4 | 11"-13" |
| | FPL17W5 | 5 | 11"-13" |
| | FPL24W5 | 5 | 15"-19" |
| | FPL24W6 | 6 | 15"-19" |
| | FPL36W6 | 6 | 24"-28" |
| | FPL48W8 | 8 | 24"-37" |
| | FPL48W2 | 2 | 37" |
| Campfire | FPL17C4 | 4 | 13"-16" |
| | FPL24C6 | 6 | 14"-17" |
| Western | FPL17WP5 | 5 | 11"-13" |
| Pine | FPL24WP6 | 6 | 15"-19" |
| | FPL36WP6 | 6 | 24"-28" |
| Linear | FPL14LB5 | 5 | 9"-10" |
| Birch | FPL28LB5 | 5 | 14"-28" |



Monsma - Michigan

WOODLAND STYLE

This is our most popular style. These have a weathered look of gray and black which looks best when resting on a bed of lava rock. These are available in 2, 4, 5, 6 and 8 piece sets up to our large FPL48 for size 36" fire ring and above fire pits.



CAMPFIRE STYLE

The Campfire set is "the original log set" and are brown and black. These look great resting on a bed of lava rock. These are available in four and six piece sets, up to our large FPL24 size for size 24" and above fire pits.



WESTERN PINE STYLE

New outdoor logs in a beautiful western pine style! The color combination is brown, tan and black creating an amazingly realistic wood feature for your project.



LINEAR BIRCH STYLE

New Birch style logs designed specifically for HPC Linear Burners! When assembled the logs are only 8" wide - multiple sets can be used for long linear applications.



LOG GRATES - FIREPLACE

HPC carries 24", 30", and 36" stainless steel grates. These are made of solid 304 stainless steel, square stock material and are welded at every joint for additional strength.



| Model | Size |
|-------|------------|
| SFG24 | 24"x18"x6" |
| SFG30 | 30"x18"x6" |
| SFG36 | 36"x18"x6" |

READY TO FINISH ENCLOSURES

These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction – especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardiboard shell, and weigh 150 lbs.



| Shape | Size | Models | Pan Size |
|--|----------------------------------|--------------------------------------|---------------|
| Round | 45"X45" X 18"h 54"X54" X 18"h | FPE45-ROUND FPE54-ROUND | 25" |
| Tapered Round | 54"X54" X 18"h | FPE54-ROUNDTAP | 25" |
| Square Tapered Square | 45"X45" X 18"h 60"X60" X 18"h | FPE45-SQUARE FPE60-SQUARETAP | 25" |
| Octagon | 45"X45" X 18"h 54"X54" X 18"h | FPE45-OCTAGON FPE54-OCTAGON | 25" |
| Rectangle | 60"X24" X 18"h | FPE60X24-LINEAR FPE60X24-H-BURNER | (See CHART A) |
| Tapered Box | 60"X36" X 18"h | FPE60X36TAP | 36" Trough |

CHART A

LINEAR FIRE PIT INSERT OPTIONS: FPE60X24-LINEAR

INTERLINK: 37X8" Fire Pit: FPE60x24-LINEAR/37X8
49X8" Fire Pit: FPE60x24-LINEAR/49X8


TROUGH: 36" Fire Pit: FPE60x24-LINEAR/36
48" Fire Pit: FPE60x24-LINEAR/48

RECTANGLE: 30x12" Fire Pit: FPE60x24-H-BURNER/30X12
36x14" Fire Pit: FPE60x24-H-BURNER/36X14

Rectangle (CHART A)



Frame is pre-cut for FPPK or MLFPK but NOT hardiboard.



Round



Tapered Square



Square



Octagon



Tapered Box



Tapered Round



Need help? Use our fire pit selector at hpcfire.com

FIRE PIT ACCESSORIES (CONTINUED)

EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

FIRE PIT COVERS

ROUND ALUMINUM COVERS - TALL

Now protect your fire feature in style! These lightweight aluminum hard covers are powder coated with UV resistant, high-heat textured black or gloss copper. They are available in two sizes - 32" (15lbs) and 44" (20lbs).

| Color | Size | Models | Height | Weight |
|-------------|------|-----------|--------|--------|
| Copper Vein | 32" | FPHC-32C | 10" | 15 lbs |
| | 44" | FPHC-44C | 14" | 20 lbs |
| Black | 32" | FPHC-32BL | 10" | 15 lbs |
| | 44" | FPHC-44BL | 14" | 20 lbs |

Copper Vein



Black



ROUND ALUMINUM COVERS - SHORT



Copper Vein

Black

| Color | Size | Models | Height | Weight |
|-------------|------|-----------|--------|----------|
| Copper Vein | 24" | FPHC-24C | 1" | 6 lbs |
| | 36" | FPHC-36C | | 13 lbs |
| | 48" | FPHC-48C | | 23.5 lbs |
| Black | 24" | FPHC-24BL | 1" | 6 lbs |
| | 36" | FPHC-36BL | | 13 lbs |
| | 48" | FPHC-48BL | | 23.5 lbs |

COPPER COVERS FOR COPPER BOWLS



Mesa
and Tempe

FPHC-26TEMP/32MESA



Tempe

FPHC-31TEMPE



Sierra

FPHC-36SIERRA-SQ



Sedona

FPHC-40SEDONA-SQ

| Shape | Finish | Models | Size | Height | Weight |
|--------|----------|--------------------|---------|--------|----------|
| Round | Hammered | FPHC-26TEMP/32MESA | 19" | 8.5" | 7.5 lbs |
| | Hammered | FPHC-31TEMPE | 32" | 5.75" | 15 lbs |
| Square | Smooth | FPHC-36SIERRA-SQ | 26"X26" | 7" | 13 lbs |
| | Hammered | FPHC-40SEDONA-SQ | 30"X30" | 7" | 13.5 lbs |

STAINLESS STEEL COVERS

These stainless steel covers are constructed of #304, 20g material with handle. Great for covering fire pits without outdoor logs. Linear trough covers are designed specifically for our trough series, be it match lit, manual ignition, or remote electronic ignition models. These are lightweight and have handles for ease of use.

LINEAR

| Stainless | Size | Model | Height | Handle | Weight |
|-----------|------------|-----------|--------|--------|--------|
| Brushed | 28" x 9.5" | TPHC-24SS | 1" | 1 | 11 lbs |
| | 40" x 9.5" | TPHC-36SS | 1" | 1 | 13 lbs |
| | 52" x 9.5" | TPHC-48SS | 1" | 2 | 15 lbs |
| | 64" x 9.5" | TPHC-60SS | 1" | 2 | 18 lbs |

RECTANGLE

| Stainless | Size | Model | Height | Handle | Weight |
|-----------|-----------|--------------|--------|--------|--------|
| Brushed | 28" x 16" | HPHC-24X12SS | 1" | 1 | 16 lbs |
| | 34" x 16" | HPHC-30X12SS | 1" | 1 | 18 lbs |
| | 40" x 18" | HPHC-36X14SS | 1" | 1 | 20 lbs |
| | 46" x 18" | HPHC-42X14SS | 1" | 2 | 22 lbs |
| | 58" x 20" | HPHC-54X16SS | 1" | 2 | 28 lbs |
| | | | | | |



Match proper accessories to your fire pit model - see Pg. 67-70.

VINYL COVERS

Made of durable black vinyl and protects your fire pit and enclosure from debris and wet weather. The round covers have elastic and rectangle covers have a pull string at the bottom for ease of applying and removal. NOTE: Skirt Length 10"



ROUND COVERS

| Max Size | Models | Fits Enclosures |
|----------|--------|-----------------|
| 35" | FPC-35 | 23" ~ 35" |
| 45" | FPC-45 | 30" ~ 45" |
| 53" | FPC-53 | 35" ~ 53" |
| 64" | FPC-64 | 43" ~ 64" |
| 76" | FPC-76 | 60" ~ 76" |



SQUARE COVERS

| Max Size | Models | Fits Enclosures |
|-----------|----------|-----------------|
| 48" x 48" | FPC-48SQ | 36" ~ 48" |
| 60" x 60" | FPC-60SQ | 45" ~ 60" |



RECTANGLE COVERS

| Max Size | Models | Fits Enclosures |
|------------|------------|-------------------|
| 48" x 30" | FPC-44X30 | 34x20" ~ 44x30" |
| 62" x 30" | FPC-62X30 | 52x20" ~ 62x30" |
| 78" x 40" | FPC-78X40 | 68x30" ~ 78x40" |
| 90" x 40" | FPC-90X40 | 80x30" ~ 90x40" |
| 94" x 30" | FPC-94X30 | 84x20" ~ 94x30" |
| 102" x 40" | FPC-102X40 | 92x30" ~ 102x40" |
| 114" x 40" | FPC-114X40 | 104x30" ~ 114x40" |
| 130" x 30" | FPC-130X30 | 120x20" ~ 130x30" |



EVOLUTION 360 AND H2Onfire COVERS

| Model | Style |
|----------|-------|
| FPC-84WB | Basin |
| FPC-35 | Bowl |



TK TORCH COVER - (FPC-TK TORCH)

TK Torch Cover w/Elastic Hem (3.5" Top Dia x 9.5" Bottom Dia. x 14" Height)



STAINLESS STEEL ACCESS DOORS

Stainless steel access doors are available for all FPPK and MLFPK Hard pipe Models.

| Model | Style |
|------------|-------------------|
| AD-RM6X6SS | 6x6 Recess Mount |
| AD-RM8X8SS | 8x8 Recess Mount |
| AD-SM8X8SS | 8x8 Surface Mount |



ENCLOSURE VENTS

Stainless Steel vents for enclosures.

| Material | Style | Size | Model |
|-----------|----------|----------|-------------|
| Stainless | Flat | 9"x4" | EV-8X4SS |
| | Flat | 12"x6" | EV-12X6SS |
| | Louvered | 14"x4.5" | EV-14X4.5SS |



FLAME CONTROL SYSTEMS

MANUAL SPARK, FLAME SENSING (FPPK) CONTROL SYSTEMS

This system utilizes a standing pilot with thermocouple sensing to safely control gas flow, manual flame height adjustment, manual switch spark igniter (battery operated), and a safety pilot valve mounted in a stainless steel box.

See chart for recommended burner size.

Includes: Assembled stainless steel control box, 36" pilot assembly with spark igniter, and blowout box, flex line, hard pipe, and fittings.

Recommended FPPK Burner Size

| Burner Type | Size w/ FPPK-HC | Size w/ FPPK-MC |
|-----------------|------------------|-----------------|
| Penta Series | 18" ~ 30" | 12" ~ 24" |
| Round Burner | 18" ~ 30" | 12" ~ 18" |
| H-Burner Series | 30"X8" ~ 48"X10" | 24"X6" ~ 30"X8" |
| Square Burner | 18" ~ 24" | 12" ~ 18" |
| T-Burner | 50" ~ 72" | 36" ~ 48" |

NOTE: Burner too small could result in unsafe LP backpressure. Burner too large could result in small, undesirable flame height.



Size: 7.5"x6.5"x2.6"

| Max BTU | Gas Type | Models |
|---------|----------------|------------|
| 140k | Natural Gas | FPPK-HC-NG |
| | Liquid Propane | FPPK-HC-LP |
| 90k | Natural Gas | FPPK-MC-NG |
| | Liquid Propane | FPPK-MC-LP |




PILOT ASSEMBLY AND BLOWOUT BOX



FPPK Control Box
FPPK-NG
FPPK-LP

Manual Spark, Flame Sense (7.5"x5"x2"), 3/8" System
90k Btu NG, 90k Btu LP

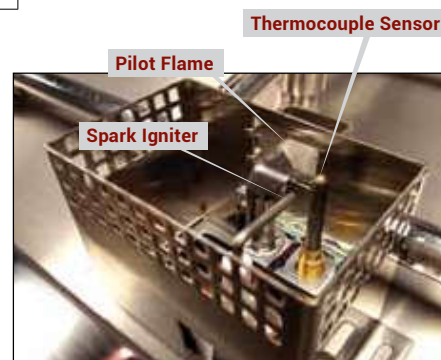

MATCH LIT, FLAME SENSING (FPSPPK) CONTROL SYSTEM

Match lit safety pilot control system with flame recognition and manual flame height adjustment. Up to 90k Btu output.

See chart for recommended burner size.

Includes: Assembled stainless steel control box, 48" pilot assembly and blowout box and flex line.

FPSPPK

Match Lit (4.75" x 3.5" x 2"), Flame Sense,
3/8" System, up to 90k Btu

When ordering, please specify gas type.

Recommended FPSPPK Burner Size

| Burner Type | Recommended Size |
|-----------------|------------------|
| Penta Series | 12" ~ 24" |
| Round Burner | 12" ~ 18" |
| H-Burner Series | 24"X6" ~ 30"X8" |
| Square Burner | 12" ~ 18" |
| T-Burner | 36" ~ 48" |

NOTE: Burner too small could result in unsafe LP backpressure. Burner too large could result in small, undesirable flame height.



OUTDOOR BURNERS

OUTDOOR BURNERS

HPC is the leader in fire ring technology and selection. All fire rings have staggered burner ports for a better flame pattern and a more significant flame presence. Both stainless steel and cold rolled steel are available—they feature ports that are drilled not punched; hub is raised above burner to reduce risk of water in valve or gas line.

There are two available flow-types. Standard capacity fire rings are constructed with 1/2" hub and tubing. For more flame the High Capacity (HC) fire rings have 3/4" hub and tubing.



Included in all LP Kits:
Burner, Air mixer, fittings

The LP Kit includes the burner, properly sized air mixer, and fittings.

The NG Kit includes the burner.

PENTA BURNERS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (FPT) | Btu | BULK CARTON | Model | Bulk Qty. |
|------|----------------|---------------|-------------|------|-----------------------|---------|-----------|
| 12" | Natural Gas | PENTA12 KIT | 1/2" | 65k | | PENTA12 | 10 |
| | Liquid Propane | PENTA12LP KIT | | | | | |
| 18" | Natural Gas | PENTA18 KIT | 1/2" | 125k | | PENTA18 | 10 |
| | Liquid Propane | PENTA18LP KIT | | | | | |
| 24" | Natural Gas | PENTA24 KIT | 1/2" | 200k | | PENTA24 | 10 |
| | Liquid Propane | PENTA24LP KIT | | | | | |
| 30" | Natural Gas | PENTA30 KIT | 3/4" | 250k | | PENTA30 | 5 |
| | Liquid Propane | PENTA30LP KIT | | | | | |
| 36" | Natural Gas | PENTA36 KIT | 3/4" | 300k | | PENTA36 | 5 |
| | Liquid Propane | PENTA36LP KIT | | | | | |
| 48" | Natural Gas | PENTA48 KIT | 3/4" | 300k | PENTA48 | 5 | |
| | Liquid Propane | PENTA48LP KIT | | | INCLUDES BURNERS ONLY | | |

Features:
Burner Ports - 12 and 3 o'clock
Raised Hub Design
Patented Technology

Penta Burner




See Pg. 11 for Penta Burner Features

ROUND BURNER- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (FPT) | Btu | BULK CARTON | Model | Bulk Qty. |
|----------|----------------|----------------|-------------|------|-----------------------|---------|-----------|
| 6" | Natural Gas | FRS-6 KIT | 1/2" | 60k | | FRS6 | 10 |
| | Liquid Propane | FRS-6LP KIT | | | | | |
| 12" | Natural Gas | FRS-12 KIT | 1/2" | 90k | | FRS12 | 10 |
| | Liquid Propane | FRS-12LP KIT | | | | | |
| 18" | Natural Gas | FRS-18 KIT | 1/2" | 150k | | FRS18 | 10 |
| | Liquid Propane | FRS-18LP KIT | | | | | |
| 24" | Natural Gas | FRS-24 KIT | 1/2" | 150k | | FRS24 | 10 |
| | Liquid Propane | FRS-24LP KIT | | | | | |
| 24" (HC) | Natural Gas | FRS-24HC KIT | 3/4" | 300k | | FRS24HC | 10 |
| | Liquid Propane | FRS-24HCPL KIT | | | | | |
| 30" | Natural Gas | FRS-30 KIT | 1/2" | 300k | | FRS30 | 5 |
| | Liquid Propane | FRS-30LP KIT | | | | | |
| 30" (HC) | Natural Gas | FRS-30HC KIT | 3/4" | 300k | FRS30HC | 5 | |
| | Liquid Propane | FRS-30HCPL KIT | | | | | |
| 36" | Natural Gas | FRS-36HC KIT | 3/4" | 300k | FRS36HC | 5 | |
| | Liquid Propane | FRS-36HCPL KIT | | | | | |
| 48" | Natural Gas | FRS-48HC KIT | 3/4" | 300k | FRS48HC | 5 | |
| | Liquid Propane | FRS-48HCPL KIT | | | INCLUDES BURNERS ONLY | | |

6" - 12"

18" - 24"

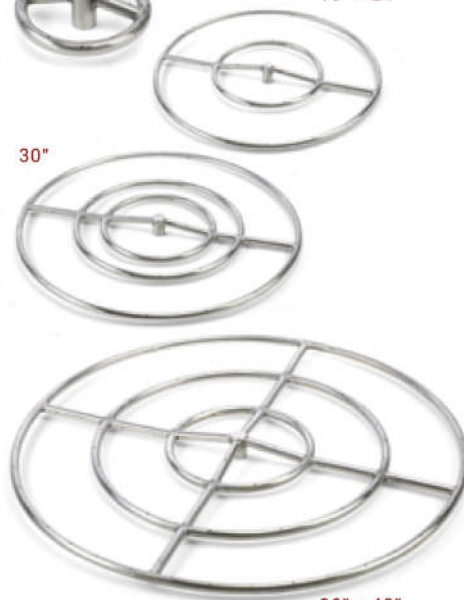

36" - 48"

Features:
Burner Ports - Staggered
Raised Hub Design


OUTDOOR BURNERS (CONTINUED)

ROUND BURNERS- COLD ROLLED STEEL (BLACK)

| Size | Gas Type | Model | Inlet (FPT) | Btu |
|------|----------------|-------------|-------------|------|
| 12" | Natural Gas | FR-12 KIT | 1/2" | 90k |
| | Liquid Propane | FR-12LP KIT | | |
| 18" | Natural Gas | FR-18 KIT | 1/2" | 150k |
| | Liquid Propane | FR-18LP KIT | | |
| 24" | Natural Gas | FR-24 KIT | 1/2" | 150k |
| | Liquid Propane | FR-24LP KIT | | |
| 30" | Natural Gas | FR-30 KIT | 1/2" | 300k |
| | Liquid Propane | FR-30LP KIT | | |
| 36" | Natural Gas | FR-36 KIT | 1/2" | 300k |
| | Liquid Propane | FR-36LP KIT | | |

| 5% DISCOUNT | |
|-----------------------|-----------|
| Model | Bulk Qty. |
| FR12 | 10 |
| FR18 | 10 |
| FR24 | 10 |
| FR30 | 5 |
| FR36 | 5 |
| INCLUDES BURNERS ONLY | |

BULK CARTON

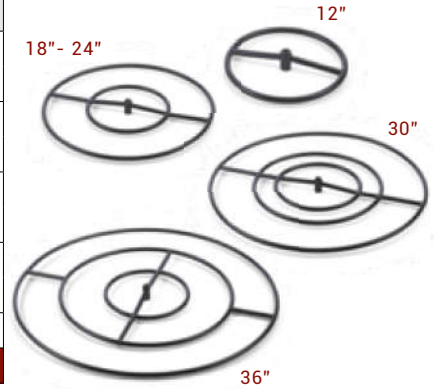


SQUARE BURNERS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (FPT) | Btu |
|------|----------------|-------------------|-------------|------|
| 12" | Natural Gas | FRSSQ-12 KIT | 1/2" | 90k |
| | Liquid Propane | FRSSQ-12LP KIT | | |
| 18" | Natural Gas | FRSSQ-18 KIT | 1/2" | 150k |
| | Liquid Propane | FRSSQ-18LP KIT | | |
| 24" | Natural Gas | FRSSQ-24 KIT | 1/2" | 150k |
| | Liquid Propane | FRSSQ-24LP KIT | | |
| 36" | Natural Gas | FRSSQ-36HC KIT | 3/4" | 300k |
| | Liquid Propane | FRSSQ-36HCCLP KIT | | |
| 48" | Natural Gas | FRSSQ-48HC KIT | 3/4" | 300k |
| | Liquid Propane | FRSSQ-48HCCLP KIT | | |

| 5% DISCOUNT | |
|-----------------------|-----------|
| Model | Bulk Qty. |
| FRSSQ12 | 10 |
| FRSSQ18 | 10 |
| FRSSQ24 | 10 |
| FRSSQ36HC | 5 |
| FRSSQ48HC | 5 |
| INCLUDES BURNERS ONLY | |

BULK CARTON

Features:
Burner Ports - Staggered
Raised Hub Design

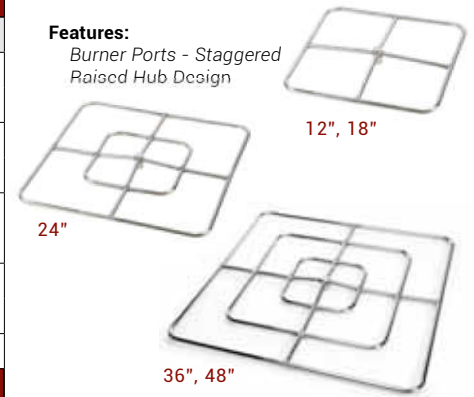


RECTANGLE BURNERS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (FPT) | Btu |
|----------|----------------|---------------------|-------------|------|
| 12"x 6" | Natural Gas | FRSR-12X6 KIT | 1/2" | 90k |
| | Liquid Propane | FRSR-12X6LP KIT | | |
| 18"x 9" | Natural Gas | FRSR-18X9 KIT | 1/2" | 150k |
| | Liquid Propane | FRSR-18X9LP KIT | | |
| 24"x 12" | Natural Gas | FRSR-24X12 KIT | 1/2" | 150k |
| | Liquid Propane | FRSR-24X12LP KIT | | |
| 36"x 18" | Natural Gas | FRSR-36X18 KIT | 1/2" | 200k |
| | Liquid Propane | FRSR-36X18LP KIT | | |
| 48"x 24" | Natural Gas | FRSR-48X24HC KIT | 3/4" | 300k |
| | Liquid Propane | FRSR-48X24HCCLP KIT | | |

| 5% DISCOUNT | |
|-----------------------|-----------|
| Model | Bulk Qty. |
| FRSR12X6 | 10 |
| FRSR18X9 | 10 |
| FRSR24X12 | 10 |
| FRSR36X18 | 5 |
| FRSR48X24HC | 5 |
| INCLUDES BURNERS ONLY | |

BULK CARTON

Features:
Burner Ports - Staggered
Raised Hub Design

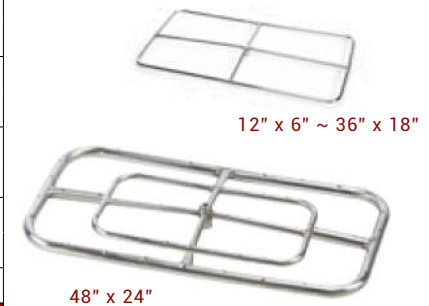

LINEAR BURNERS- INTERLINK PAN & T-BURNER, STAINLESS STEEL (#304)


| Size (A") | Gas Type | Model | Inlet (MPT) | Btu |
|-----------|----------------|--------------|-------------|------|
| 25"X 8" | Natural Gas | IL25X8SS | 1/2" | 50k |
| | Liquid Propane | IL25X8SS-LP | | |
| 37"X 8" | Natural Gas | IL37X8SS | 1/2" | 75k |
| | Liquid Propane | IL37X8SS-LP | | |
| 49"X 8" | Natural Gas | IL49X8SS | 1/2" | 100k |
| | Liquid Propane | IL49X8SS-LP | | |
| 61"X 8" | Natural Gas | IL61X8SS | 1/2" | 125k |
| | Liquid Propane | IL61X8SS-LP | | |
| 73"X 8" | Natural Gas | IL73X8SS | 1/2" | 150k |
| | Liquid Propane | IL73X8SS-LP | | |
| 97"X 8" | Natural Gas | IL97X8SS | 1/2" | 200k |
| | Liquid Propane | IL97X8SS-LP | | |
| 121"X 8" | Natural Gas | IL121X8SS | 1/2" | 250k |
| | Liquid Propane | IL121X8SS-LP | | |

Features:

Sidewalls add strength and hold media
Burner Ports - Staggered
Removable center section on some models
Raised Hub Design

Includes:

Pan, Burner and Brackets

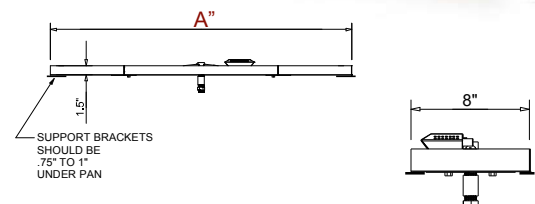

LINEAR BURNERS- TROUGH PAN & T-BURNER STAINLESS STEEL (#304)




| Size (A") | Gas Type | Model | Inlet (MPT) | Btu |
|-----------|----------------|--------------|-------------|------|
| 24" | Natural Gas | 24SS TRGH | 1/2" | 50k |
| | Liquid Propane | 24SS TRGH-LP | | |
| 36" | Natural Gas | 36SS TRGH | 1/2" | 75k |
| | Liquid Propane | 36SS TRGH-LP | | |
| 48" | Natural Gas | 48SS TRGH | 1/2" | 100k |
| | Liquid Propane | 48SS TRGH-LP | | |
| 60" | Natural Gas | 60SS TRGH | 1/2" | 125k |
| | Liquid Propane | 60SS TRGH-LP | | |
| 72" | Natural Gas | 72SS TRGH | 1/2" | 150k |
| | Liquid Propane | 72SS TRGH-LP | | |
| 96" | Natural Gas | 96SS TRGH | 1/2" | 200k |
| | Liquid Propane | 96SS TRGH-LP | | |

Includes:
Pan, Burner and Brackets



Features:
Sidewalls add Rigidity
Burner Ports - Staggered




HPC is currently phasing out the V-style trough as inventories are depleted- we are replacing with a new design.
All dimensions for both types are the same (L,W & H).

RECTANGLE BURNERS- STAINLESS STEEL (#304)

| Size (A") | Gas Type | Model | Inlet (FPT) | Btu |
|-----------|----------------|--------------|-------------|------|
| 24" x 12" | Natural Gas | 24X12SS-H | 1/2" | 60k |
| | Liquid Propane | 24X12SS-H-LP | | |
| 30" x 12" | Natural Gas | 30X12SS-H | 1/2" | 90k |
| | Liquid Propane | 30X12SS-H-LP | | |
| 36" x 14" | Natural Gas | 36X14SS-H | 1/2" | 90k |
| | Liquid Propane | 36X14SS-H-LP | | |
| 42" x 14" | Natural Gas | 42X14SS-H | 1/2" | 150k |
| | Liquid Propane | 42X14SS-H-LP | | |
| 54" x 16" | Natural Gas | 54X16SS-H | 1/2" | 150k |
| | Liquid Propane | 54X16SS-H-LP | | |
| 66" x 16" | Natural Gas | 66X16SS-H | 1/2" | 250k |
| | Liquid Propane | 66X16SS-H-LP | | |
| 78" x 16" | Natural Gas | 78X16SS-H | 1/2" | 300k |
| | Liquid Propane | 78X16SS-H-LP | | |
| 90" x 16" | Natural Gas | 90X16SS-H | 1/2" | 300k |
| | Liquid Propane | 90X16SS-H-LP | | |

Features:
Burner Ports - Staggered
Raised Hub Design
Sidewalls add Structure and Hold Media

Includes:
Pan, Burner and Brackets



LINEAR T-BURNERS- RAISED HUB, STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (FPT) | Btu |
|------|----------------|------------|-------------|------|
| 24" | Natural Gas | LTBSS24 | 1/2" | 50k |
| | Liquid Propane | LTBSS24LP | | |
| 36" | Natural Gas | LTBSS36 | 1/2" | 75k |
| | Liquid Propane | LTBSS36LP | | |
| 48" | Natural Gas | LTBSS48 | 1/2" | 100k |
| | Liquid Propane | LTBSS48LP | | |
| 60" | Natural Gas | LTBSS60 | 1/2" | 125k |
| | Liquid Propane | LTBSS60LP | | |
| 72" | Natural Gas | LTBSS72 | 1/2" | 150k |
| | Liquid Propane | LTBSS72LP | | |
| 96" | Natural Gas | LTBSS96 | 1/2" | 200k |
| | Liquid Propane | LTBSS96LP | | |
| 120" | Natural Gas | LTBSS120 | 1/2" | 250k |
| | Liquid Propane | LTBSS120LP | | |

Features:
Burner Ports - Staggered
Raised Hub Design



Photo - Hearth Products Controls

Need help? Use our fire pit selector at hpcfire.com

OUTDOOR BURNERS (CONTINUED)

LINEAR T-BURNERS- FLAT DESIGN, STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (MPT) | Btu |
|------|----------------|----------|-------------|------|
| 24" | Natural Gas | TBSS24 | 1/2" | 50k |
| | Liquid Propane | TBSS24LP | | |
| 36" | Natural Gas | TBSS36 | 1/2" | 75k |
| | Liquid Propane | TBSS36LP | | |
| 48" | Natural Gas | TBSS48 | 1/2" | 100k |
| | Liquid Propane | TBSS48LP | | |
| 60" | Natural Gas | TBSS60 | 1/2" | 125k |
| | Liquid Propane | TBSS60LP | | |
| 72" | Natural Gas | TBSS72 | 1/2" | 150k |
| | Liquid Propane | TBSS72LP | | |
| 96" | Natural Gas | TBSS96 | 1/2" | 200k |
| | Liquid Propane | TBSS96LP | | |

Features:
 Burner Ports - Staggered
 Low profile Flat Design




S-FIRE BURNERS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (MPT) | Btu |
|------|----------------|---------------|-------------|------|
| 30" | Natural Gas | SFIRE30 KIT | 1/2" | 75K |
| | Liquid Propane | SFIRE30LP KIT | | |
| 36" | Natural Gas | SFIRE36 KIT | 1/2" | 85K |
| | Liquid Propane | SFIRE36LP KIT | | |
| 48" | Natural Gas | SFIRE48 KIT | 1/2" | 110K |
| | Liquid Propane | SFIRE48LP KIT | | |
| 60" | Natural Gas | SFIRE60 KIT | 1/2" | 135K |
| | Liquid Propane | SFIRE60LP KIT | | |
| 72" | Natural Gas | SFIRE72 KIT | 1/2" | 165K |
| | Liquid Propane | SFIRE72LP KIT | | |

| 5% DISCOUNT | |
|-----------------------|-----------|
| Model | Bulk Qty. |
| SFIRE30 | 10 |
| SFIRE36 | 10 |
| SFIRE48 | 10 |
| SFIRE60 | 10 |
| SFIRE72 | 10 |
| INCLUDES BURNERS ONLY | |

Features:
 Burner Ports - Small Separation
 for Distinctive S-Pattern Flame
 Raised Hub Design

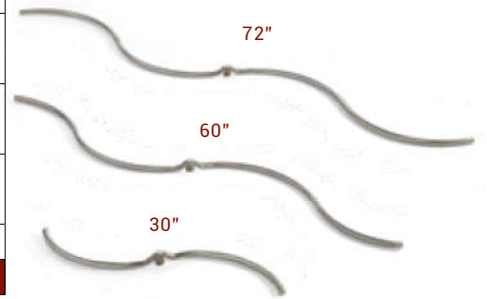

FIRE PIT H-BURNERS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (FPT) | Btu |
|----------|----------------|--------------|-------------|------|
| 18"x 6" | Natural Gas | HBSB18 KIT | 1/2" | 60k |
| | Liquid Propane | HBSB18LP KIT | | |
| 24"x 6" | Natural Gas | HBSB24 KIT | 1/2" | 90k |
| | Liquid Propane | HBSB24LP KIT | | |
| 30"x 8" | Natural Gas | HBSB30 KIT | 1/2" | 90k |
| | Liquid Propane | HBSB30LP KIT | | |
| 36"x 8" | Natural Gas | HBSB36 KIT | 1/2" | 150k |
| | Liquid Propane | HBSB36LP KIT | | |
| 48"x 10" | Natural Gas | HBSB48 KIT | 1/2" | 150k |
| | Liquid Propane | HBSB48LP KIT | | |
| 60"x 10" | Natural Gas | HBSB60 KIT | 1/2" | 250k |
| | Liquid Propane | HBSB60LP KIT | | |
| 72"x 10" | Natural Gas | HBSB72 KIT | 1/2" | 300k |
| | Liquid Propane | HBSB72LP KIT | | |
| 84"x 10" | Natural Gas | HBSB84 KIT | 1/2" | 300k |
| | Liquid Propane | HBSB84LP KIT | | |

| 5% DISCOUNT | |
|-----------------------|-----------|
| Model | Bulk Qty. |
| HBSB18 | 10 |
| HBSB24 | 10 |
| HBSB30 | 10 |
| HBSB36 | 10 |
| HBSB48 | 10 |
| HBSB60 | 10 |
| HBSB72 | 10 |
| HBSB84 | 10 |
| INCLUDES BURNERS ONLY | |



Features:
 Burner Ports - Point Inward
 Raised Hub Design

FIREPLACE H-BURNERS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (MPT) | Btu |
|---------|----------------|-------------|-------------|------|
| 12"x 6" | Natural Gas | HBS12 KIT | 3/8" | 60k |
| | Liquid Propane | HBS12LP KIT | | |
| 18"x 6" | Natural Gas | HBS18 KIT | 3/8" | 60k |
| | Liquid Propane | HBS18LP KIT | | |
| 24"x 6" | Natural Gas | HBS24 KIT | 3/8" | 90k |
| | Liquid Propane | HBS24LP KIT | | |
| 30"x 6" | Natural Gas | HBS30 KIT | 1/2" | 120k |
| | Liquid Propane | HBS30LP KIT | | |
| 36"x 6" | Natural Gas | HBS36 KIT | 1/2" | 150k |
| | Liquid Propane | HBS36LP KIT | | |
| 48"x 6" | Natural Gas | HBS48 KIT | 1/2" | 170k |
| | Liquid Propane | HBS48LP KIT | | |
| 60"x 6" | Natural Gas | HBS60 KIT | 1/2" | 200k |
| | Liquid Propane | HBS60LP KIT | | |

| 5% DISCOUNT | |
|-----------------------|-----------|
| Model | Bulk Qty. |
| HBS12 | 10 |
| HBS18 | 10 |
| HBS24 | 10 |
| HBS30 | 10 |
| HBS36 | 10 |
| HBS48 | 10 |
| HBS60 | 10 |
| INCLUDES BURNERS ONLY | |



Features:

Burner Ports - Point Inward
Low Profile
Side Gas Inlet



DUAL BURNERS- STAINLESS STEEL (#304)

| Size | Gas Type | Model | Inlet (MPT) | Btu |
|----------|----------------|--------------|-------------|------|
| 18" x 6" | Natural Gas | DSB-18 KIT | 1/2" | 90K |
| | Liquid Propane | DSB-18LP KIT | | |
| 24" x 6" | Natural Gas | DSB-24 KIT | 1/2" | 90k |
| | Liquid Propane | DSB-24LP KIT | | |
| 30" x 6" | Natural Gas | DSB-30 KIT | 1/2" | 150K |
| | Liquid Propane | DSB-30LP KIT | | |
| 36" x 6" | Natural Gas | DSB-36 KIT | 1/2" | 150k |
| | Liquid Propane | DSB-36LP KIT | | |

| 5% DISCOUNT | |
|-----------------------|-----------|
| Model | Bulk Qty. |
| DSB18 | 10 |
| DSB24 | 10 |
| DSB30 | 10 |
| DSB36 | 10 |
| INCLUDES BURNERS ONLY | |

Features:

Burner Ports - Staggered
Side Gas Inlet



DSBP18
18" x 8" x 2" Pan

LOG LIGHTER BURNER- STAINLESS STEEL

Includes - stainless steel burner tube, LP air mixer or NG orifice, connector and end cap, El. Can be connected together in sections.

Custom Lengths Available

| Model # | Size in inches | Gas |
|---------|----------------|-----|
| SS17N | 17" | NG |
| SS17P | 17" | LP |



Photo- Hearth Products Controls

Need help? Use our fire pit selector at hpcfire.com

FIRE PIT COMPONENTS

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

Have your heart on building your dream pit? We have you covered on all the bases from outdoor burners to regulators. We will make sure you start off on the right foot.

FIRE PIT PANS

ROUND BOWL STYLE- STAINLESS STEEL (#304)

| Size | Model | Thickness | Welded Nipple | SOLD SEPARATELY | FRSB-11 |
|------|----------|-----------|---------------|-----------------|---------|
| 13" | 570-13 | 18g | 1/2" | | 3 |
| 19" | 570-19 | 18g | 1/2" | | 3 |
| 25" | 570-25 | 18g | 1/2" | | 3 |
| 31" | 570-31 | 18g | 1/2" | | 3 |
| 31" | 570-31HC | 18g | 3/4" | | 3 |
| 37" | 570-37HC | 18g | 3/4" | | 3 |
| 43" | 570-43HC | 18g | 3/4" | | 3 |

May require use of FRSB-11
Burner Brackets - Sold Separately



ROUND FLAT STYLE- STAINLESS STEEL (#304)

| Size | Model | Thickness | Welded Nipple | SOLD SEPARATELY | FRSB-11 |
|--------|----------|-----------|---------------|-----------------|---------|
| 7.75" | 571-8 | 18g | 1/2" | | 3 |
| 13.75" | 571-14 | 18g | 1/2" | | 3 |
| 17.75" | 571-18 | 18g | 1/2" | | 3 |
| 23.75" | 571-24 | 18g | 1/2" | | 3 |
| 29.75" | 571-30 | 18g | 1/2" | | 3 |
| 35.75" | 571-36 | 18g | 1/2" | | 3 |
| 35.75" | 571-36HC | 18g | 3/4" | | 3 |
| 43.75" | 571-42HC | 18g | 3/4" | SOLD SEPARATELY | 3 |
| 53.75" | 571-54HC | 18g | 3/4" | | 3 |



SQUARE FLAT STYLE- STAINLESS STEEL (#304)

| Size | Model | Thickness | Welded Nipple | SOLD SEPARATELY | FRSB-11 |
|------|------------|-----------|---------------|-----------------|---------|
| 18" | 571-18SQ | 18g | 1/2" | | 3 |
| 24" | 571-24SQ | 18g | 1/2" | | 3 |
| 30" | 571-30SQ | 18g | 1/2" | | 3 |
| 36" | 571-36HCSQ | 18g | 3/4" | | 3 |
| 42" | 571-42HCSQ | 18g | 3/4" | | 3 |



SQUARE BOWL STYLE- STAINLESS STEEL (#304)

| Size | Model | Thickness | Welded Nipple | SOLD SEPARATELY | FRSB-11 |
|------|------------|-----------|---------------|-----------------|---------|
| 18" | 570-18SQ | 18g | 1/2" | | 3 |
| 24" | 570-24SQ | 18g | 1/2" | | 3 |
| 30" | 570-30SQ | 18g | 1/2" | | 3 |
| 36" | 570-36HCSQ | 18g | 3/4" | | 3 |
| 42" | 570-42HCSQ | 18g | 3/4" | | 3 |



FRSB-11 BRACKET (SOLD SEPARATELY- STAINLESS STEEL (#304))

This unique bracket is universal to all HPC burners making them more rigid than competitive models. These brackets hold the burner in place alleviating issues with heat transfer warp in the burner and in the pan.



Available
May 2018



LINEAR TROUGH STYLE

Sold with T-Burner - See Pg. 57



LINEAR INTERLINK STYLE

Sold with T-Burner - See Pg. 56



RECTANGLE BOWL STYLE

Sold with H-Burner - See Pg. 57

FLEX LINE



STANDARD CAPACITY FLEX LINE

All standard capacity flex lines are 1/2" OD and 3/8" ID with 1/2" female pipe threads on one end and 3/8" male pipe threads on the other.

| Model | Length | Max BTU/HR (NG) | Max BTU/HR (LP) | Flare Size | Fittings Included (Two) |
|-------|--------|-----------------|-----------------|------------|-------------------------|
| SSC6 | 6" | 110,000 | 177,000 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC12 | 12" | 102,000 | 163,200 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC18 | 18" | 93,000 | 148,960 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC24 | 24" | 85,000 | 136,000 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC30 | 30" | 77,000 | 123,360 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC36 | 36" | 71,000 | 113,760 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC48 | 48" | 60,500 | 96,800 | 1/2" | 3/8"MIP, 1/2" FIP |



HIGH CAPACITY FLEX LINE

All high capacity flex lines are 5/8" OD and 1/2" ID with 1/2" female pipe threads on one end and 1/2" male pipe threads on the other.

| Model | Length | Max BTU/HR (NG) | Max BTU/HR (LP) | Flare Size | Fittings Included (Two) |
|----------|--------|-----------------|-----------------|------------|-------------------------|
| SSC-HC12 | 12" | 180,000 | 288,000 | 3/4" | 1/2" MIP, 1/2" FIP |
| SSC-HC18 | 18" | 164,000 | 262,700 | 3/4" | 1/2" MIP, 1/2" FIP |
| SSC-HC24 | 24" | 150,000 | 240,000 | 3/4" | 1/2" MIP, 1/2" FIP |
| SSC-HC30 | 30" | 136,000 | 217,600 | 3/4" | 1/2" MIP, 1/2" FIP |



ULTRA HIGH CAPACITY FLEX LINE

| Model | Length | Max BTU/HR (NG) | Max BTU/HR (LP) | Flare Size | Fittings Included (Two) |
|-----------|--------|-----------------|-----------------|------------|-------------------------|
| SSC-HHC24 | 24" | 291,000 | 465,400 | 1" | 3/4" MIP, 3/4" FIP |
| SSC-HHC36 | 36" | 256,000 | 409,400 | 1" | 3/4" MIP, 3/4" FIP |

TRANQUIL WHISTLE-FREE FLEX LINE

HPC has been a long time supplier of reliable, maintenance-free flex lines. We offer our Tranquil Flex Line Series to eliminate the nuisance whistling found on those tough installs. Sizes available in standard capacity are 12", 18", 24", and 30" lengths. These are stainless steel with 3/8" ID and are in stock and ready for shipment.

| Model | Length | Max BTU/HR (NG) | Max BTU/HR (LP) | Flare Size | Fittings Included (Two) |
|---------|--------|-----------------|-----------------|------------|-------------------------|
| SSC-W12 | 12" | 102,000 | 163,200 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC-W18 | 18" | 93,000 | 148,960 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC-W24 | 24" | 85,000 | 136,000 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSC-W30 | 30" | 77,000 | 123,360 | 1/2" | 3/8"MIP, 1/2" FIP |



TRANQUIL WHISTLE-FREE, STANDARD CAPACITY (BLACK)

| Model | Length | Max BTU/HR (NG) | Max BTU/HR (LP) | Flare Size | Fittings Included (Two) |
|----------|--------|-----------------|-----------------|------------|-------------------------|
| SSCB-W18 | 18" | 93,000 | 148,960 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSCB-W24 | 24" | 85,000 | 136,000 | 1/2" | 3/8"MIP, 1/2" FIP |
| SSCB-W30 | 30" | 77,000 | 123,360 | 1/2" | 3/8"MIP, 1/2" FIP |

* Natural Gas maximum Btu/hr. Straight Length Capacity; 0.64 SG, 1,000 Btu per Cu. Ft. at .5 water column pressure drop

** Liquid Propane Maximum Btu/hr. Straight Length Capacity; 1.55 SG, 2,500 Btu per Cu. Ft. at .5 water column pressure drop



Photo Courtesy of AEI Gas - Florida



Need help? Use our fire pit selector at hpcfire.com

FIRE PIT COMPONENTS (CONTINUED)

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

Have your heart on building your dream pit? We have you covered on all the bases from outdoor burners to regulators. We will make sure you start off on the right foot.

DECORATIVE KEY VALVES

Key Valve Part Numbers: Key Valves are numbered as either Angled or Straight, and based off of color. For example, MAFB is described as Manual Angled Flat Black. MSFB would be Manual Straight Flat Black.

STANDARD CAPACITY VALVES (1/2")

1/4 Turn angle or straight manual ball valve with flange and key. 1/2" inlet and outlet. For floor or wall mounting.

Recommended for gas shut off of 150k Btu or less

HIGH CAPACITY VALVES (3/4")

1/4 Turn angle or straight manual ball valve with flange and key. 3/4" inlet and outlet. For floor or wall mounting.

Recommended for gas shut off of 400k Btu or less


DANTE VALVE



327-CH

CHROME FLANGE/ KEY

| Valve | Inlet / Outlet | Models |
|----------|----------------|---------|
| Angle | 1/2" | MACB |
| | 3/4" | MACB-HC |
| Straight | 1/2" | MSCB |
| | 3/4" | MSCB-HC |



BRASS FLANGE/ KEY

| Valve | Inlet / Outlet | Models |
|----------|----------------|---------|
| Angle | 1/2" | MABB |
| | 3/4" | MABB-HC |
| Straight | 1/2" | MSBB |
| | 3/4" | MSBB-HC |



FLAT BLACK FLANGE/ KEY

| Valve | Inlet / Outlet | Models |
|----------|----------------|---------|
| Angle | 1/2" | MAFB |
| | 3/4" | MAFB-HC |
| Straight | 1/2" | MSFB |
| | 3/4" | MSFB-HC |



PEWTER FLANGE/ KEY

| Valve | Inlet / Outlet | Models |
|----------|----------------|---------|
| Angle | 1/2" | MAPW |
| | 3/4" | MAPW-HC |
| Straight | 1/2" | MSPW |
| | 3/4" | MSPW-HC |



ANTIQUE BRASS FLANGE/ KEY

| Valve | Inlet / Outlet | Models |
|----------|----------------|---------|
| Angle | 1/2" | MAAB |
| | 3/4" | MAAB-HC |
| Straight | 1/2" | MSAB |
| | 3/4" | MSAB-HC |



ANTIQUE COPPER FLANGE/ KEY

| Valve | Inlet / Outlet | Models |
|----------|----------------|---------|
| Angle | 1/2" | MAAC |
| | 3/4" | MAAC-HC |
| Straight | 1/2" | MSAC |
| | 3/4" | MSAC-HC |



FLANGE AND KEY ONLY



KEYS



FLANGE ONLY

304 L Polished Chrome Flange
306 L Polished Brass Flange

REGULATORS



770-150
150k Btu pressure regulator
Natural Gas : 5 psi input
Liquid Propane: 2 psi input
1/2"x1/2", 4"-12" water column



770-300
300k Btu pressure regulator
Natural Gas : 5 psi input
Liquid Propane: 2 psi input
1"x1", 4"-12" water column



770-13A15
MAXITROL Vent protector with a 1/8" inlet made for 770-150



770-13A15-5
MAXITROL Vent protector with a 3/8" inlet made for 770-300



658
100k Btu LP pressure regulator
3/8" x 3/8", 4"-12" water column

GRILL REPAIR REGULATOR & HOSE - LP



658/90-18
18" Rubber Hose
90 degree Regulator
100k Btu, 3/8 Fitting

658/90-36
36" Rubber Hose
90 degree Regulator
100k Btu, 3/8 Fitting



658SS/90-36
36" Braided SS Hose
90 degree Regulator
100k Btu, 3/8 Fitting

MISCELLANEOUS PARTS

SPARK IGNITER COMPONENTS



690-AA
Mounts easily with 2 screws. Use with external switch.
AA batteries easy to replace.
Sealed battery compartment.
Dual ignition outlets
(Replaces #690)



691AA-HPC
Screw-in cap holds unit in place.
Uses 1 AA battery. Sealed battery chamber. Easy Battery Replacement



130
Snap-in Type
One spark per button push.



131
Electrode to use with 130, 690, or 691

FPK PUSH BUTTON SPARK IGNITION KIT

Includes Spark Generator, Ignition, Mounting Plate and AA Battery

FPK



FPLP SERIES SMALL LP TANK CONVERSION KIT

Includes Regulator, Air Mixer, 12' Hose with quick disconnect, shut off valve, and fittings.

Minimum Burner Size: 12"

Minimum T-Burner Size: 48"

IMPORTANT: If using glass media, glass application to burner must be minimal to avoid backpressure. Read instructions carefully.

Not for use with HPC **Certified** Inserts



FPLP40 - 40k Btu
FPLP90 - 90k Btu

FIRE PIT COMPONENTS (CONTINUED)

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

PRO-FLEX LINE AND ACCESSORIES

PRO-FLEX GAS LINE

The Pro-Flex Line is CSA Certified to meet strict codes. See our grounding kit below, necessary to meet codes. Includes adjustable 1/2" to 1" grounding clamp and 50' of 6 gauge wire.

| Models | Spool Size | Line Size |
|------------|------------|-----------|
| PFCT 1275 | 75 ft | 1/2" |
| PFCT 3475 | 75 ft | 3/4" |
| PFCT 12225 | 225 ft | 1/2" |
| PFCT 34225 | 225 ft | 3/4" |



PRO-FLEX FITTINGS

| Model | Size | Fitting | Box QTY |
|------------|------|--------------------|---------|
| PFFN 1212B | 1/2" | Female | 12 |
| PFMF 1212B | 1/2" | Male | 12 |
| PFTP 1212B | 1/2" | Termination Flange | 12 |
| PFMF 3406B | 3/4" | Male | 6 |

NATURAL GAS/LP QUICK DISCONNECT HOSE ASSEMBLY (580)

144" x 3/8" I.D.
Gray PVC Galvanized Steel Hose
CSA-AGA/CGA approved to -40 Degrees F

Quick Disconnect Nipple and Socket dust cap
Attached Hose and Quick Disconnect Installation Instructions

NATURAL GAS/PROPANE BBQ AND APPLIANCE OUTLET (581)

Designed for Indoor/Outdoor Application
Heavy Duty 20 Gauge Stainless Steel Outlet Cover
CSA-AGA/CGA Approved to -40 Degrees F
60k Btu Natural Gas, 90k Btu Propane Gas

5 PSIG maximum operation pressure
Lockable safety feature denies connect/disconnect while gas is flowing.
Manual gas valve with appliance connection.

| Models | Description |
|--------|--|
| 580 | 144"x3/8" with quick disconnect assembly |
| 580-1 | 144x3/8" with Male Quick Disconnect Only |
| 580-V | Female Quick Disconnect Fitting |
| 581 | Appliance Outlet |



REPLACEMENT COMPONENTS

EI SERIES REPLACEMENT COMPONENTS

| Item | Model |
|-------------------------------------|---------------|
| On/Off & High/Low Models | |
| Hot Surface Igniter | 312-IGNITER |
| Thermocouple- 36" | 311-T/C |
| Electronic Module | 312-EIMOD |
| Transformer | 576-75VA |
| Fuse (5A) | See Note* |
| On / Off Models Only | |
| Gas Valve | 210-EI415 |
| High / Low Models Only | |
| Remote- Handheld | 312-REMOTE |
| Remote- Transceiver | 312-W/T |
| Antenna | 312-ANTENNA |
| Antenna Bracket | 312-AB |
| Antenna Extension Cable - 60" | AEK-60HI/LO |
| Gas Valve- 2 Stage | 312-2STAGE415 |

EI SERIES REPLACEMENT PILOT ASSEMBLIES - ON/OFF & HI/LO MODELS

| Gas | Btu Rating (Main) | Model | Length |
|-----|-------------------|-----------------------|--------|
| NG | 50K ~ 275k | HSIP-36SS | 36" |
| NG | 300k Btu | HSIP-36SS-300NG | 36" |
| NG | 400k | HSIP-36SS-400NG | 36" |
| LP | 50K ~ 225k Btu | HSIP-36SS-50 / 225LP | 36" |
| LP | 250k ~ 400k Btu | HSIP-36SS-250 / 400LP | 36" |

*Commonly found fast acting 5A Fuse

REPLACEMENT COMPONENTS

HWI SERIES REPLACEMENT COMPONENTS

PLEASE NOTE: FOR MVK-HWI Control box we require the box be returned for repair. Please call use for support!



120-HWI
Burner Mount Clamp



311-T/C
36" Thermocouple



311-T/C 72
72" Thermocouple



311-T/C EXT
36" Extension



598HWI
Blowout Box



HWI-913
Igniter Repair Kit

HWI SERIES REPLACEMENT PILOT ASSEMBLIES

| Gas | Btu Rating (Main) | Model | Length |
|-----|-------------------|-----------------------|--------|
| NG | 50K ~ 275k | HWIP-36SS | 36" |
| NG | 300k Btu | HWIP-36SS-300NG | 36" |
| NG | 400k | HWIP-36SS-400NG | 36" |
| LP | 50K ~ 225k Btu | HWIP-36SS-50 / 225LP | 36" |
| LP | 250k ~ 400k Btu | HWIP-36SS-250 / 400LP | 36" |

FPPK SERIES REPLACEMENT COMPONENTS



108-C
Safety Pilot Valve (90k),
FPPK-NG



109-C
Safety Pilot Valve (90k),
Rear Inlet Valve, 2010 FPPK
Model



110
Safety Pilot Valve (90k), Side
Inlet, used in FPPK-MC Box



691AA-HPC
Igniter Switch



FPPK-P36 NG
FPPK-P36 LP
36" Pilot Tube, T/C



598HWI
Blowout Box



111
Black Knob



902
Valve Face Plate Nut
(For 108-C Valve)



100-HC
High Capacity Valve (140k)
used in FPPK-HC Box



693
Igniter

FPK SERIES REPLACEMENT COMPONENTS



131
Spark Electrode



691AA-HPC
Igniter Switch

OTHER ELECTRONIC IGNITION COMPONENTS



576-40VA
24VAC Transformer - 40VA



576-100VA
24VAC Transformer - 100VA



210-EI
Honeywell 150k Valve



210-EIHC
Honeywell 270k Valve



210-EI415
Honeywell 415K Valve



210-EI MOD
Honeywell IPI Module



FIRE PIT COMPONENTS (CONTINUED)

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

REPLACEMENT COMPONENTS

EVOLUTION 360 AND H2ONFIRE REPLACEMENT COMPONENTS



980-2100
2,100 gph Water Pump

980-3200
3,200 gph Water Pump

980-4800
4,800 gph Water Pump



980-AF
Auto-fill Valve Assembly w/float



980-LLS
Low Level Sensor / Switch



980-LED BLUE 82
360 Bowl 90 degree LED Strip (82")



980-LED BLUE 8
4-Scupper LED Strip (8")



980-CVD-12W
LED Driver (12 Watt)



980-CVD-22W
LED Driver (22 Watt)



980-FILTER
Replacement Filter

FITTINGS AND NIPPLES



559
1/2" Cap



560
1/2" Street Elbow



561
1/2" Close Nipple



563
3/8" x 1 1/2" Nipple



564
1/2" Female to Female Elbow



565
1/2" Couple



566
1/2" to 3/8" Reducing Couple



567
1/2" Tee



568
1/2" Cross



588
3/4" to 1/2" Reducer



673
3/8" cap



678BRS
1/2" Brass Orifice Adapter



678BRS-HC
3/4" HC Brass Orifice Adapter



687
3/8" Street Elbow



688
3/8" Couple



701
3/4" Cross



594
3/4" Couple



588-1
1" to 3/4" Reducer



702
Stainless Steel 3/4" cap



584
3/4" Close Nipple



596
3/4" Street Elbow



596-1
3/4" 90 Degree Elbow



1/2" OR 3/4" Diameter Stainless Steel Nipples.
We can make any size!

APPENDIX (EI SERIES)



ELECTRONIC IGNITION INSERTS

THIS CHART WILL HELP YOU DECIDE WHAT SIZE AND HOW MUCH OF AN ACCESSORY IS NEEDED

| Models | OPTIONAL COMPONENTS | | | | MEDIA | | |
|--|----------------------------|-----------------------------|-----------------------------|---|---|---------------------------------|---------------------------|
| | Vinyl Covers** (Pg. 53) | Outdoor Logs*** (Pg. 50) | Wind Guards**** (Pg. 47) | Install Collar IC44SS-FF 2 per box (Pg. 48) | Lava Rock or Rolled Lava (Pg. 49) | Decorative Glass (Pg. 49) | River Rock (Pg. 48) |
| ROUND BOWL INSERTS (PG. 12) | | | | | 1 Bag ~ 1/2 cu. ft. | (Lbs) | (Box) |
| 13SSEI | FPC-35 | FPL12xx | WG23-D | 1 Box | 1 Bag | 20 | 1 |
| PENTA19EI | FPC-45 | FPL17xx | WG30-D | 1 Box | 2 Bags | 35 | 1 |
| PENTA25EI | FPC-45 | FPL24xx | WG30-D | 1 Box | 2 Bags | 55 | 2 |
| PENTA31EI | FPC-53 | FPL24xx | WG38-D | 1 Box | 4 Bags | 85 | 3 |
| PENTA37EI | FPC-53 | FPL36xx | WG48-D | 2 Boxes | 4 Bags | 120 | 4 |
| PENTA43EI | FPC-64 | FPL48xx | WG48-D | 2 Boxes | 4 Bags | 155 | 5 |
| ROUND FLAT INSERTS (PG. 14) | | | | | | | |
| 14FSSEI | FPC-35 | FPL12xx | WG23-D | 1 Box | 1 Bag | 25 | 1 |
| PENTA18EI | FPC-45 | FPL17xx | WG23-D | 1 Box | 2 Bags | 30 | 1 |
| PENTA24EI | FPC-45 | FPL24xx | WG30-D | 1 Box | 2 Bags | 50 | 2 |
| PENTA30EI | FPC-53 | FPL24xx | WG38-D | 2 Boxes | 2 Bags | 75 | 3 |
| PENTA36EI | FPC-53 | FPL36xx | WG38-D | 2 Boxes | 4 Bags | 110 | 4 |
| PENTA42EI | FPC-64 | FPL48xx | WG48-D | 2 Boxes | 4 Bags | 150 | 5 |
| PENTA54EI | FPC-76 | FPL48xx | N/A | 3 Boxes | 6 Bags | 250 | 8 |
| SQUARE BOWL INSERTS (PG. 16) | | | | | | | |
| 18SSEI-SQBL | FPC-48SQ | FPL17xx | WG25-SQ | 1 Box | 2 Bags | 35 | 1 |
| 24SSEI-SQBL | FPC-48SQ | FPL24xx | WG31-SQ | 2 Boxes | 2 Bags | 65 | 2 |
| 30SSEI-SQBL | FPC-60SQ | FPL24xx | WG37-SQ | 2 Boxes | 2 Bags | 100 | 3 |
| 36SSEI-SQBL | FPC-60SQ | FPL36xx | WG43-SQ | 2 Boxes | 6 Bags | 135 | 4 |
| 42SSEI-SQBL | FPC-60SQ | FPL48xx | WG49-SQ | 2 Boxes | 6 Bags | 185 | 4 |
| SQUARE FLAT INSERTS (PG. 18) | | | | | | | |
| 18FSSEI-SQ | FPC-48SQ | FPL17xx | WG25-SQ | 1 Box | 2 Bags | 35 | 1 |
| 24FSSEI-SQ | FPC-48SQ | FPL24xx | WG31-SQ | 2 Boxes | 2 Bags | 65 | 2 |
| 30FSSEI-SQ | FPC-60SQ | FPL24xx | WG37-SQ | 2 Boxes | 2 Bags | 100 | 3 |
| 36FSSEI-SQ | FPC-60SQ | FPL36xx | WG43-SQ | 2 Boxes | 6 Bags | 135 | 4 |
| 42FSSEI-SQ | FPC-60SQ | FPL48xx | WG49-SQ | 2 Boxes | 6 Bags | 185 | 4 |
| RECTANGLE BOWL INSERTS (PG. 20) | | | | | | | |
| 24X12SSEI-H | FPC-62X30 | FPL17xx | WG31X19-RECT | 1 Box | 2 Bags | 35 | 1 |
| 30X12SSEI-H | FPC-62X30 | FPL24xx | WG37X19-RECT | 1 Box | 2 Bags | 40 | 2 |
| 36X14SSEI-H | FPC-78X40 | FPL24xx | WG43X21-RECT | 2 Boxes | 2 Bags | 55 | 2 |
| 42X14SSEI-H | FPC-78X40 | FPL36xx | WG49X21-RECT | 2 Boxes | 2 Bags | 65 | 3 |
| 54X16SSEI-H | FPC-78X40 | FPL36xx | WG61X23-RECT | 2 Boxes | 4 Bags | 95 | 3 |
| 66X16SSEI-H | FPC-90X40 | FPL36xx | N/A | 2 Boxes | 6 Bags | 115 | 4 |
| 78X16SSEI-H | FPC-102X40 | FPL36xx (2) | N/A | 3 Boxes | 6 Bags | 135 | 4 |
| 90X16SSEI-H | FPC-114X40 | FPL36xx (2) | N/A | 3 Boxes | 8 Bags | 160 | 5 |
| S-FIRE BURNER INSERTS (PG. 22) | | | | | 1 Bag ~ 1/2 cu. ft. | (Lbs) | (Box) |
| 36X14SSEI-S | FPC-78X40 | FPL24xx | WG43X21-RECT | 2 Boxes | 2 Bags | 55 | 2 |
| 42X14SSEI-S | FPC-78X40 | FPL36xx | WG49X21-RECT | 2 Boxes | 2 Bags | 65 | 3 |
| 54X16SSEI-S | FPC-78X40 | FPL36xx | WG61X23-RECT | 2 Boxes | 4 Bags | 95 | 3 |
| 66X16SSEI-S | FPC-90X40 | FPL36xx | N/A | 2 Boxes | 6 Bags | 115 | 4 |
| 78X16SSEI-S | FPC-102X40 | FPL36xx | N/A | 3 Boxes | 6 Bags | 135 | 4 |

Notes: **Vinyl Covers: Part numbers listed are commonly used sizes- other vinyl sizes and Hard Covers available (Pg. 52).

***Outdoor Logs: Part numbers listed are commonly used sizes- other sizes available (Pg. 50).

****Wind Guards: Part numbers listed are commonly used sizes- other sizes available (Pg. 47).



Need help? Use our fire pit selector at hpcfire.com

APPENDIX (EI SERIES) - (CONTINUED)

| Models | OPTIONAL COMPONENTS | | | | MEDIA | | |
|--------|----------------------------|-----------------------------|-----------------------------|--|--------------------------------------|------------------------------|------------------------|
| | Vinyl Covers** (Pg. 53) | Outdoor Logs*** (Pg. 50) | Wind Guards**** (Pg. 47) | Install Collar IC44SS-FF 2 per box (Pg. 48) | Lava Rock or Rolled Lava (Pg. 49) | Decorative Glass (Pg. 49) | River Rock (Pg. 48) |

LINEAR TROUGH INSERTS (PG. 24)

| | | | | | | | |
|-------------|-----------|-------------|-----------|---------|--------|----|---|
| 24SSEI-TRGH | FPC-44X30 | FPL14xx | WG31X15-L | 1 Box | 1 Bag | 20 | 1 |
| 36SSEI-TRGH | FPC-62X30 | FPL28xx | WG43X15-L | 1 Box | 2 Bags | 25 | 1 |
| 48SSEI-TRGH | FPC-62X30 | FPL14xx (2) | WG55X15-L | 2 Boxes | 2 Bags | 35 | 1 |
| 60SSEI-TRGH | FPC-94X30 | FPL28xx (2) | WG67X15-L | 2 Boxes | 2 Bags | 40 | 1 |
| 72SSEI-TRGH | FPC-94X30 | FPL28xx (3) | N/A | 2 Boxes | 2 Bags | 50 | 2 |

LINEAR INTERLINK INSERTS (PG. 26)

| | | | | | | | |
|-------------|------------|-------------|-----------|---------|--------|----|---|
| 25X8SSEI-L | FPC-44X30 | FPL14xx | WG31X15-L | 1 Box | 1 Bag | 20 | 1 |
| 37X8SSEI-L | FPC-62X30 | FPL28xx | WG43X15-L | 2 Boxes | 2 Bags | 25 | 1 |
| 49X8SSEI-L | FPC-62X30 | FPL14xx (2) | WG55X15-L | 2 Boxes | 2 Bags | 35 | 1 |
| 61X8SSEI-L | FPC-94X30 | FPL14xx (2) | WG67X15-L | 2 Boxes | 2 Bags | 40 | 2 |
| 73X8SSEI-L | FPC-94X30 | FPL28xx (2) | N/A | 2 Boxes | 4 Bags | 50 | 2 |
| 97X8SSEI-L | FPC-130X30 | FPL28xx (3) | N/A | 2 Boxes | 4 Bags | 60 | 2 |
| 121X8SSEI-L | FPC-130X30 | FPL28xx (4) | N/A | 2 Boxes | 6 Bags | 75 | 3 |

Notes: **Vinyl Covers: Part numbers listed are commonly used sizes- other vinyl sizes and Hard Covers available (Pg. 52).

***Outdoor Logs: Part numbers listed are commonly used sizes- other sizes available (Pg. 50).

****Wind Guards: Part numbers listed are commonly used sizes- other sizes available (Pg. 47).



Photo Courtesy of Media - New Jersey

APPENDIX (FPPK SERIES)



PUSH BUTTON / FLAME SENSE INSERTS

THIS CHART WILL HELP YOU DECIDE WHAT SIZE AND HOW MUCH OF AN ACCESSORY IS NEEDED

| Models | OPTIONAL COMPONENTS | | | | | MEDIA | | |
|--|-------------------------------------|-------------------------------|--------------------------------|--------------------------------|---|---|---------------------------------|---------------------------|
| | Gas Input Flex Line* (Pg. 61) | Vinyl Covers** (Pg. 53) | Outdoor Logs*** (Pg. 50) | Wind Guards**** (Pg. 47) | Install Collar IC44SS-FF 2 per box (Pg. 48) | Lava Rock or Rolled Lava (Pg. 49) | Decorative Glass (Pg. 49) | River Rock (Pg. 48) |
| ROUND BOWL INSERTS (PG. 13) | | | | | | 1 Bag ~ 1/2 cu. ft | (Lbs) | (Box) |
| FPPK13 | SSC-HC24 | FPC-35 | FPL12xx | WG23-D | 1 Box | 1 Bag | 20 | 1 |
| PENTA19FPPK | SSC-HC24 | FPC-45 | FPL17xx | WG30-D | 1 Box | 2 Bags | 35 | 1 |
| PENTA25FPPK | SSC-HC24 | FPC-45 | FPL24xx | WG30-D | 1 Box | 2 Bags | 55 | 2 |
| PENTA31FPPK | SSC-HC24 | FPC-53 | FPL24xx | WG38-D | 2 Boxes | 4 Bags | 85 | 3 |
| PENTA37FPPK | SSC-HC24 | FPC-53 | FPL36xx | WG48-D | 2 Boxes | 4 Bags | 120 | 4 |
| ROUND FLAT INSERTS (PG. 15) | | | | | | | | |
| FPPK14 | SSC-HC24 | FPC-35 | FPL12xx | WG23-D | 1 Box | 1 Bag | 25 | 1 |
| PENTA18FPPK | SSC-HC24 | FPC-45 | FPL17xx | WG23-D | 1 Box | 2 Bags | 30 | 1 |
| PENTA24FPPK | SSC-HC24 | FPC-45 | FPL24xx | WG30-D | 1 Box | 2 Bags | 50 | 2 |
| PENTA30FPPK | SSC-HC24 | FPC-53 | FPL24xx | WG38-D | 2 Boxes | 2 Bags | 75 | 3 |
| PENTA36FPPK | SSC-HC24 | FPC-53 | FPL36xx | WG38-D | 2 Boxes | 4 Bags | 110 | 4 |
| SQUARE BOWL INSERTS (PG. 17) | | | | | | | | |
| FPPK18-SQBL | SSC-HC24 | FPC-48SQ | FPL17xx | WG25-SQ | 1 Box | 2 Bags | 35 | 1 |
| FPPK24-SQBL | SSC-HC24 | FPC-48SQ | FPL24xx | WG31-SQ | 2 Boxes | 2 Bags | 65 | 2 |
| FPPK30-SQBL | SSC-HC24 | FPC-60SQ | FPL24xx | WG37-SQ | 2 Boxes | 2 Bags | 100 | 3 |
| FPPK36-SQBL | SSC-HC24 | FPC-60SQ | FPL36xx | WG43-SQ | 2 Boxes | 6 Bags | 135 | 4 |
| FPPK42-SQBL | SSC-HC24 | FPC-60SQ | FPL48xx | WG49-SQ | 2 Boxes | 6 Bags | 185 | 4 |
| SQUARE FLAT INSERTS (PG. 19) | | | | | | | | |
| FPPK18-SQ | SSC-HC24 | FPC-48SQ | FPL17xx | WG25-SQ | 1 Box | 2 Bags | 35 | 1 |
| FPPK24-SQ | SSC-HC24 | FPC-48SQ | FPL24xx | WG31-SQ | 2 Boxes | 2 Bags | 65 | 2 |
| FPPK30-SQ | SSC-HC24 | FPC-60SQ | FPL24xx | WG37-SQ | 2 Boxes | 2 Bags | 100 | 3 |
| FPPK36-SQ | SSC-HC24 | FPC-60SQ | FPL36xx | WG43-SQ | 2 Boxes | 6 Bags | 135 | 4 |
| FPPK42-SQ | SSC-HC24 | FPC-60SQ | FPL48xx | WG49-SQ | 2 Boxes | 6 Bags | 185 | 4 |
| RECTANGLE BOWL INSERTS (PG. 21) | | | | | | | | |
| FPPK24X12-H | SSC-HC24 | FPC-62X30 | FPL17xx | WG31X19-RECT | 1 Box | 2 Bags | 35 | 1 |
| FPPK30X12-H | SSC-HC24 | FPC-62X30 | FPL24xx | WG37X19-RECT | 1 Box | 2 Bags | 40 | 2 |
| FPPK36X14-H | SSC-HC24 | FPC-78X40 | FPL24xx | WG43X21-RECT | 2 Boxes | 2 Bags | 55 | 2 |
| FPPK42X14-H | SSC-HC24 | FPC-78X40 | FPL36xx | WG49X21-RECT | 2 Boxes | 2 Bags | 65 | 3 |
| FPPK54X16-H | SSC-HC24 | FPC-78X40 | FPL36xx | WG61X23-RECT | 2 Boxes | 4 Bags | 95 | 3 |
| S-FIRE BURNER INSERTS (PG. 23) | | | | | | | | |
| 36X14SSEI-S | SSC-HC24 | FPC-78X40 | FPL24xx | WG43X21-RECT | 2 Boxes | 2 Bags | 55 | 2 |
| 42X14SSEI-S | SSC-HC24 | FPC-78X40 | FPL36xx | WG49X21-RECT | 2 Boxes | 2 Bags | 65 | 3 |
| 54X16SSEI-S | SSC-HC24 | FPC-78X40 | FPL36xx | WG61X23-RECT | 2 Boxes | 4 Bags | 95 | 3 |
| LINEAR TROUGH INSERTS (PG. 25) | | | | | | | | |
| FPPK24-TRGH | SSC-HC24 | FPC-44X30 | FPL14xx | WG31X15-L | 1 Box | 1 Bag | 20 | 1 |
| FPPK36-TRGH | SSC-HC24 | FPC-62X30 | FPL28xx | WG43X15-L | 1 Box | 2 Bags | 20 | 1 |
| FPPK48-TRGH | SSC-HC24 | FPC-62X30 | FPL14xx (2) | WG55X15-L | 2 Boxes | 2 Bags | 30 | 1 |
| FPPK60-TRGH | SSC-HC24 | FPC-94X30 | FPL28xx (2) | WG67X15-L | 2 Boxes | 2 Bags | 40 | 1 |
| FPPK72-TRGH | SSC-HC24 | FPC-94X30 | FPL28xx (3) | N/A | 2 Boxes | 2 Bags | 50 | 2 |

Notes: *Gas Input Flex Line: Part numbers listed are 24" length- other lengths available. Flex Btu confirmation required. (Pg. 61).

Notes: **Vinyl Covers: Part numbers listed are commonly used sizes- other vinyl sizes and Hard Covers available (Pg. 52).

***Outdoor Logs: Part numbers listed are commonly used sizes- other sizes available (Pg. 50).

****Wind Guards: Part numbers listed are commonly used sizes- other sizes available (Pg. 47).

APPENDIX (FPPK SERIES) - (CONTINUED)

| Models | OPTIONAL COMPONENTS | | | | | MEDIA | | |
|--------|-------------------------------------|-------------------------------|--------------------------------|--------------------------------|---|---|---------------------------------|---------------------------|
| | Gas Input Flex Line* (Pg. 61) | Vinyl Covers** (Pg. 53) | Outdoor Logs*** (Pg. 50) | Wind Guards**** (Pg. 47) | Install Collar IC44SS-FF 2 per box (Pg. 48) | Lava Rock or Rolled Lava (Pg. 49) | Decorative Glass (Pg. 49) | River Rock (Pg. 48) |

LINEAR INTERLINK INSERTS (PG. 27)

| | | | | | | | | |
|------------|----------|------------|-------------|-----------|---------|--------|----|---|
| FPPK25X8-L | SSC-HC24 | FPC-44X30 | FPL14xx | WG31X15-L | 1 Box | 1 Bag | 20 | 1 |
| FPPK37X8-L | SSC-HC24 | FPC-62X30 | FPL28xx | WG43X15-L | 1 Box | 2 Bags | 25 | 1 |
| FPPK49X8-L | SSC-HC24 | FPC-62X30 | FPL14xx (2) | WG55X15-L | 2 Boxes | 2 Bags | 35 | 1 |
| FPPK61X8-L | SSC-HC24 | FPC-94X30 | FPL14xx (2) | WG67X15-L | 2 Boxes | 2 Bags | 40 | 2 |
| FPPK73X8-L | SSC-HC24 | FPC-94X30 | FPL28xx (2) | N/A | 2 Boxes | 4 Bags | 50 | 2 |
| FPPK97X8-L | SSC-HC24 | FPC-130X30 | FPL28xx (3) | N/A | 2 Boxes | 4 Bags | 60 | 2 |

APPENDIX (MLFPK SERIES)

MATCH LIT INSERTS

THIS CHART WILL HELP YOU DECIDE WHAT SIZE AND HOW MUCH OF AN ACCESSORY IS NEEDED

| Models | OPTIONAL COMPONENTS | | | | | MEDIA | | |
|--------|-------------------------------------|-------------------------------|--------------------------------|--------------------------------|---|---|---------------------------------|---------------------------|
| | Gas Input Flex Line* (Pg. 61) | Vinyl Covers** (Pg. 53) | Outdoor Logs*** (Pg. 50) | Wind Guards**** (Pg. 47) | Install Collar IC44SS-FF 2 per box (Pg. 48) | Lava Rock or Roleed Lava (Pg. 49) | Decorative Glass (Pg. 49) | River Rock (Pg. 48) |

ROUND BOWL INSERTS (PG. 13)

| | | | | | | 1 Bag ~ 1/2 cu. ft. | (Lbs) | (Box) |
|--------------|-------|--------|---------|--------|---------|---------------------|-------|-------|
| PENTA13MLFPK | SSC24 | FPC-35 | FPL12xx | WG23-D | 1 Box | 1 Bag | 20 | 1 |
| PENTA19MLFPK | SSC24 | FPC-45 | FPL17xx | WG30-D | 1 Box | 2 Bags | 35 | 1 |
| PENTA25MLFPK | SSC24 | FPC-45 | FPL24xx | WG30-D | 1 Box | 2 Bags | 55 | 2 |
| PENTA31MLFPK | SSC24 | FPC-53 | FPL24xx | WG38-D | 2 Boxes | 4 Bags | 85 | 3 |

ROUND FLAT INSERTS (PG. 15)

| | | | | | | | | |
|--------------|-------|--------|---------|--------|---------|--------|----|---|
| PENTA14MLFPK | SSC24 | FPC-35 | FPL12xx | WG23-D | 1 Box | 1 Bag | 25 | 1 |
| PENTA18MLFPK | SSC24 | FPC-45 | FPL17xx | WG23-D | 1 Box | 2 Bags | 30 | 1 |
| PENTA24MLFPK | SSC24 | FPC-45 | FPL24xx | WG30-D | 1 Box | 2 Bags | 50 | 2 |
| PENTA30MLFPK | SSC24 | FPC-53 | FPL24xx | WG38-D | 2 Boxes | 2 Bags | 75 | 3 |

SQUARE BOWL INSERTS (PG. 17)

| | | | | | | | | |
|--------------|-------|----------|---------|---------|---------|--------|-----|---|
| MLFPK18-SQBL | SSC24 | FPC-48SQ | FPL17xx | WG25-SQ | 1 Box | 2 Bags | 35 | 1 |
| MLFPK24-SQBL | SSC24 | FPC-48SQ | FPL24xx | WG31-SQ | 2 Boxes | 2 Bags | 65 | 2 |
| MLFPK30-SQBL | SSC24 | FPC-60SQ | FPL24xx | WG37-SQ | 2 Boxes | 2 Bags | 100 | 3 |

SQUARE FLAT INSERTS (PG. 19)

| | | | | | | | | |
|------------|-------|----------|---------|---------|---------|--------|-----|---|
| MLFPK18-SQ | SSC24 | FPC-48SQ | FPL17xx | WG25-SQ | 1 Box | 2 Bags | 35 | 1 |
| MLFPK24-SQ | SSC24 | FPC-48SQ | FPL24xx | WG31-SQ | 2 Boxes | 2 Bags | 65 | 2 |
| MLFPK30-SQ | SSC24 | FPC-60SQ | FPL24xx | WG37-SQ | 2 Boxes | 2 Bags | 100 | 3 |

RECTANGLE BOWL INSERTS (PG. 21)

| | | | | | | | | |
|--------------|-------|-----------|---------|--------------|---------|--------|----|---|
| MLFPK24X12-H | SSC24 | FPC-62X30 | FPL17xx | WG31X19-RECT | 1 Box | 2 Bags | 35 | 1 |
| MLFPK30X12-H | SSC24 | FPC-62X30 | FPL24xx | WG37X19-RECT | 1 Box | 2 Bags | 40 | 2 |
| MLFPK36X14-H | SSC24 | FPC-78X40 | FPL24xx | WG43X21-RECT | 2 Boxes | 2 Bags | 55 | 2 |

S-FIRE BURNER INSERTS (PG. 23)

| | | | | | | | | |
|-------------|-------|-----------|---------|--------------|---------|--------|----|---|
| 36X14SSEI-S | SSC24 | FPC-78X40 | FPL24xx | WG43X21-RECT | 2 Boxes | 2 Bags | 55 | 2 |
|-------------|-------|-----------|---------|--------------|---------|--------|----|---|

LINEAR TROUGH INSERTS (PG. 25)

| | | | | | | | | |
|--------------|-------|-----------|-------------|-----------|---------|--------|----|---|
| MLFPK24-TRGH | SSC24 | FPC-44X30 | FPL14xx | WG31X15-L | 1 Box | 1 Bag | 20 | 1 |
| MLFPK36-TRGH | SSC24 | FPC-62X30 | FPL28xx | WG43X15-L | 1 Box | 2 Bags | 25 | 1 |
| MLFPK48-TRGH | SSC24 | FPC-62X30 | FPL14xx (2) | WG55X15-L | 2 Boxes | 2 Bags | 35 | 1 |

LINEAR INTERLINK INSERTS (PG. 27)

| | | | | | | | | |
|-------------|-------|-----------|-------------|-----------|---------|--------|----|---|
| MLFPK25X8-L | SSC24 | FPC-44X30 | FPL14xx | WG31X15-L | 1 Box | 1 Bag | 20 | 1 |
| MLFPK37X8-L | SSC24 | FPC-62X30 | FPL28xx | WG43X15-L | 2 Boxes | 2 Bags | 25 | 1 |
| MLFPK49X8-L | SSC24 | FPC-62X30 | FPL14xx (2) | WG55X15-L | 2 Boxes | 2 Bags | 35 | 1 |

POINT OF PURCHASE PRODUCTS

HPC DISPLAY KIOSK



HPC offers a very appealing and educational kiosk for your store front. It is constructed of long-lasting steel and powder coated for a professional look- and is very simple to assemble. The kiosk explains in Layman terms how to select and construct the style, shape, and technology of their fire pit with the help of the Dealer while using HPC fire pit inserts. The Kiosk Kit includes the kiosk stand, burners with placards, a laminated flip-book and several take-home brochures (replenished at no cost).



Flip Book Cover



Open Flip Book



Take-Home Brochures

LITERATURE



| Style | Round |
|-----------------------------|---------------------------|
| LIT-BROCHURE OUTDOOR | Night Impressions |
| LIT- CATALOG OUTDOOR | Outdoor Product Catalog |
| LIT- WATER BROCHURE OUTDOOR | Fire Meets Water Brochure |
| LIT- KIOSK BROCHURE | Ignite the Night Brochure |

HPC DISPLAY STANDS

Need to display your fire pit inserts? Our steel display stands give full access to the insert for your customer to look at every detail!

The fire pit insert displays are available as follows:

- 1) Push Button / Spark Ignition (FPPK) Display Kit- includes applicable FPPK fire pit insert, match lit insert control valve (327-CH) and the display stand.
- 2) Electronic Ignition (EI) Display Kit- includes applicable EI fire pit insert and the display stand.
- 3) Stand Only

| Style | Round | Rectangle | Linear Trough | Linear- Interlink | Description |
|------------|-----------------|----------------------|----------------|--------------------|---|
| | DS25-ROUND-FPPK | DS30X12-HBURNER-FPPK | DS36-TRGH-FPPK | DS49X8-LINEAR-FPPK | Includes Push Button / Spark Ignition fire pit insert match lit valve, mounting sleeve & stand. |
| | DS25-ROUND-EI | DS30X12-HBURNER-EI | DS36-TRGH-EI | DS49X8-LINEAR-EI | Includes Electronic Ignition fire pit insert and display stand. |
| Stand Only | DS25-ROUND | DS30X12-HBURNER | DS36-TRGH | DS49X8-LINEAR | Includes stand only. |



DS25-ROUND-FPPK

For use with 25" Round Insert



DS30X12-HBURNER-FPPK

For use with 30x12" H-Burner Insert



DS36-TRGH-FPPK

For use with 36" Trough Insert



DS49X8-LINEAR-FPPK

For use with 49"x8" Interlink Insert

POINT OF PURCHASE BANNER



BANNER KITS

48"x30" Banner for storefront display

| Model | Description |
|--------------------|--|
| BANNER KIT | Coroplast (Rigid Plastic Board) |
| BANNER KIT-OUTDOOR | Vinyl Outdoor Banner with gromits in the corners |

BANNER KIT and
BANNER KIT-OUTDOOR