



DIRECT-VENT FIREPLACES

Tahoe Deluxe DVD32FP

Spec Sheet



GLASS VIEWING AREA

27 1/2" W x 20" H

ACTUAL DIMENSIONS

34" W x 32 3/4" H x 16 3/8" D

INCLUDES

- 5-piece Ceramic Fiber log set on Slope Glaze Burner

REQUIRES

- Fireplace Barrier Screen or Door Set and Frame with Barrier Screen


TECHNICAL INFORMATION

- Maximum heat output: 18,000 BTU (LP, Nat)
- Efficiency Rating:
 - 58.92% A. F. U. E
 - 57.90% P4
- Weight: 96 lbs.
- Clearances:
 - Side Wall: 0"
 - Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot or Millivolt
- Vent Size: 4 x 6 inch
- Top or Rear Vent

FIELD INSTALLED ACCESSORIES

- Liners: Aged Brick, Banded Brick, Black Porcelain, Herringbone, Stacked Limestone
- Blower, Automatic
- Barriers:
 - Door Frame with Matte Black Barrier or Matte Black Barrier
- Decorative Doors & Frames:
 - Arch, Rectangle, Mission Arch and Mission Rectangle

DVD32FP


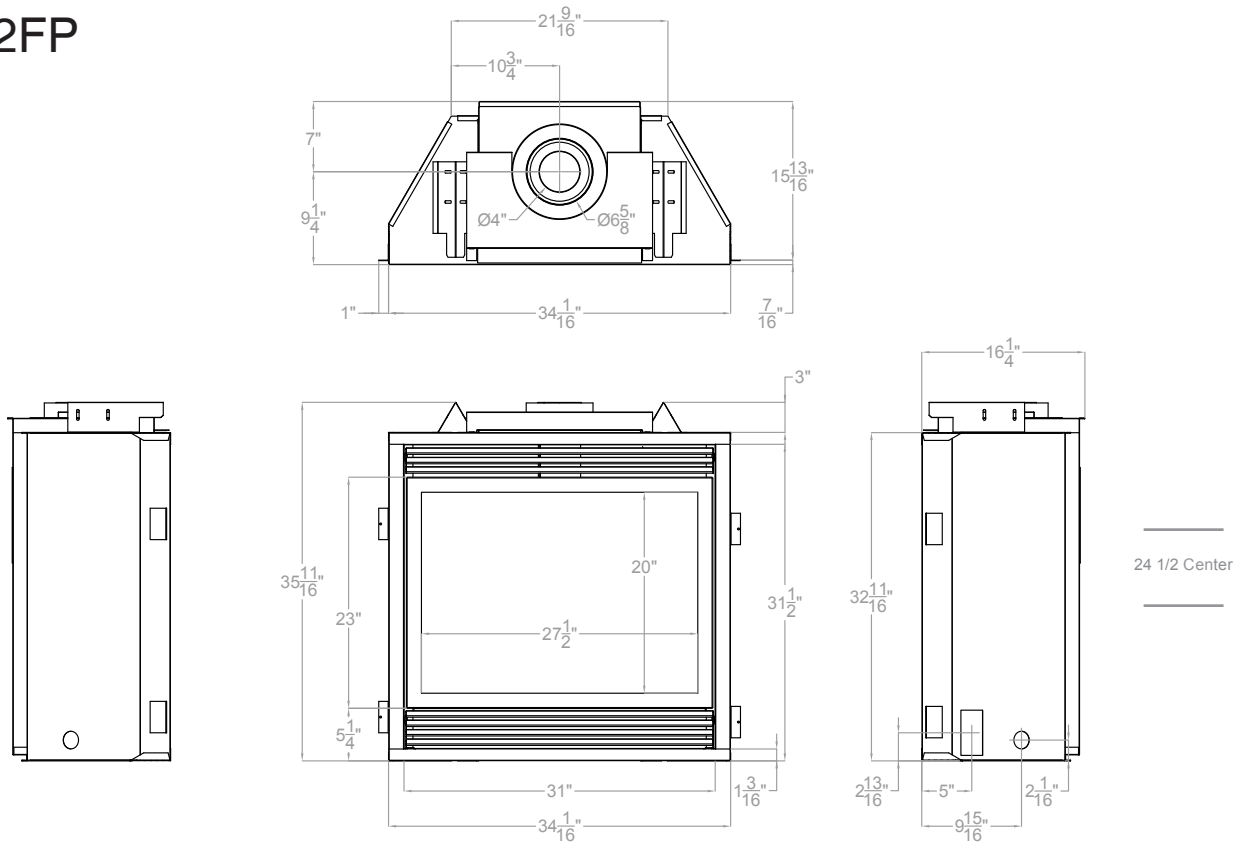


Clearance to Combustibles (in inches)

Back	0 (0 mm)
Side	0 (0 mm)
Floor	0 (0 mm)
Top Stand-off	0 (0 mm)
Top Framing Edge	3 (76 mm)

Framing Dimensions (in inches)

Height (A)	35 3/4
Width (B)	34 3/8
Depth (C)	16 3/8

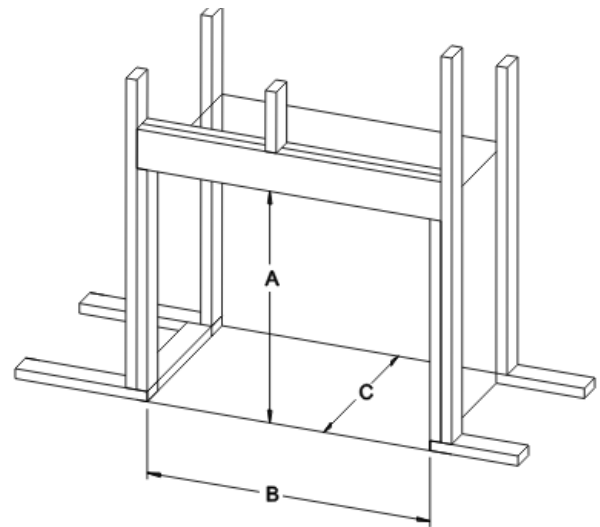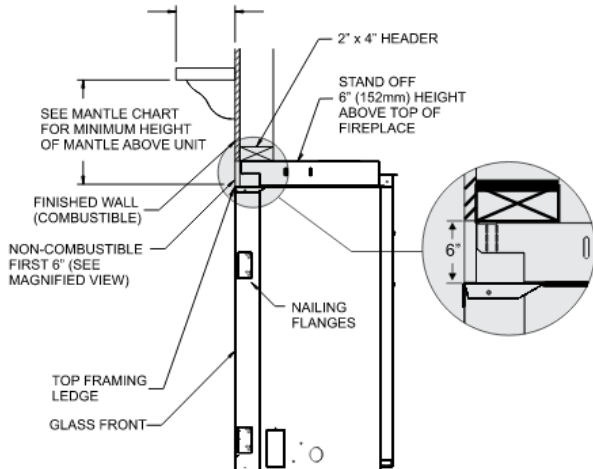

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use “natural light” incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:



This appliance is design-certified to the ANSI standard by:



SINCE 1932

Empire Comfort Systems Inc.
918 Freeburg Ave.
Belleville, IL 62220-2623
info@empirecomfort.com
01/18