



**HEARTH & HOME**  
technologies

# Log Placement Instructions

Models:

ITEM NUMBER	DESCRIPTION	FOR USE WITH
MZMR-18	Mezmer Bark 18 Log Set	Lumonessen VF or OD Burner
MZMR-24	Mezmer Bark 24 Log Set	Lumonessen VF or OD Burner
MZMR-30	Mezmer Bark 30 Log Set	Lumonessen VF or OD Burner
MZMRSP-18	Mezmer Split 18 Log Set	Lumonessen VF or OD Burner
MZMRSP-24	Mezmer Split 24 Log Set	Lumonessen VF or OD Burner
MZMRSP-30	Mezmer Split 30 Log Set	Lumonessen VF or OD Burner


## **▲WARNING!**

The positioning of the logs is critical to the safe, clean operation of this gas log set. Sooting and other problems may result if the logs are not properly positioned per these instructions. Failure to position in accordance with the diagrams below, or failure to use only parts specifically approved for this log set may result in property damage or personal injury.

## PLACE MEZMER-18/24/30 LOG SETS

1. Place Rear Log (#1) on rear support. Figure 1
2. Place Front Log (#3) between burner and grate. Use tab on right side as guide on grate. Figure 2
3. Place Middle Log (#2) on middle support. Log will sit on right side of support. Rest bottom left corner on front log in notch. Figure 3
4. Place Top Right Log (#4) by resting log on front and middle log. Figure 4
5. Place last two logs (#5, #6) by resting logs on middle and back logs. Figure 5a and 5b


**NOTE:** Logs #1, #2 and #3 have ridges on the bottom which secure the logs to burner frame. After installing each log, check to be sure it is stable.

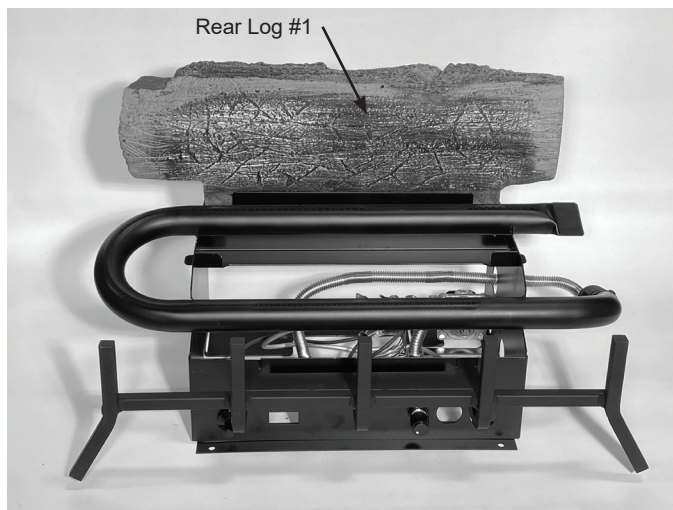

**Figure 1 -  
Place Rear Log**




**Figure 2 -  
Place Front Log**

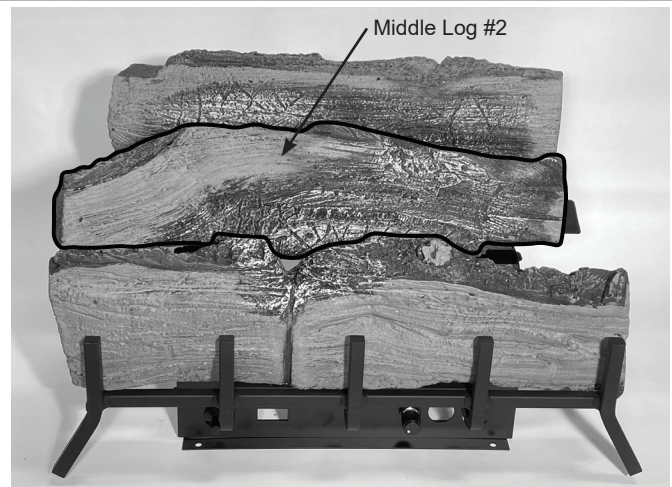

**Figure 3 -  
Place Middle Log**



**Figure 4 -  
Place Top Right Log**

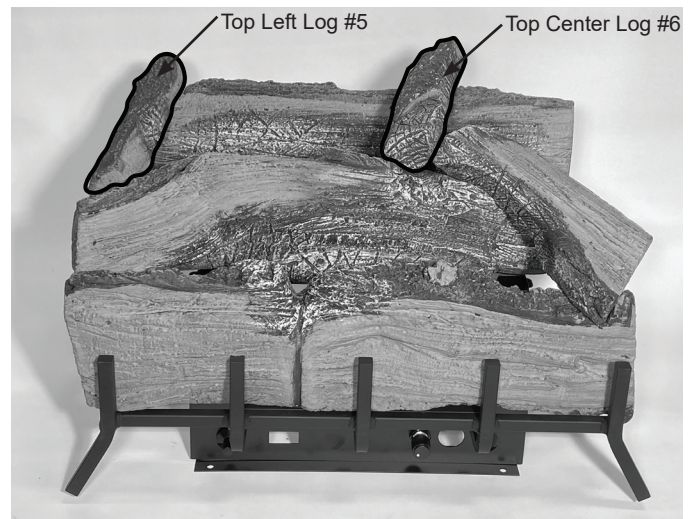

**Figure 5a- Mezmer Split Log Set  
Place Top Left and Center Logs**

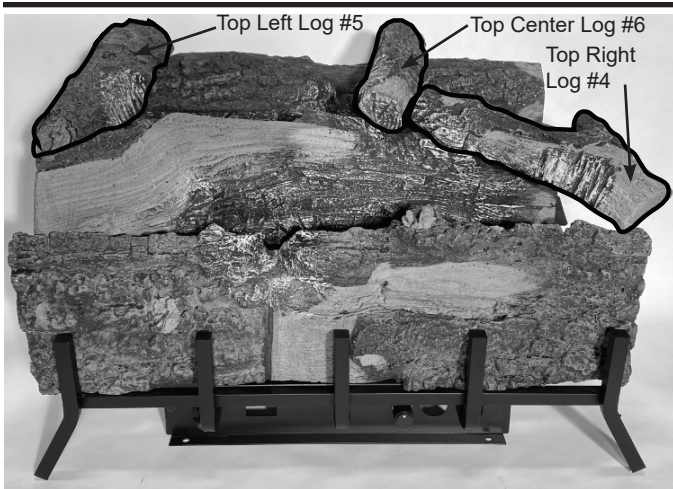


Figure 5b- Mezmer Bark Log Set  
Place Top Left and Center Logs

## PLACE THE DECORATIVE ROCK

### WARNING

**DO NOT** sprinkle volcanic rock on the logs or around the pilot or the main burner. This may cause sooting. Only place volcanic rock on the floor of the fireplace.

During initial operation of the new heater, burning logs will give off a paper burning smell and orange flames will be present. Simply open the windows for a few hours to vent the odor.

Hearth & Home Technologies  
7571 215th Street West, Lakeville, MN 50044  
[www.hearthnhome.com](http://www.hearthnhome.com)