




Burner Systems:

- P45-18
- P45-24
- P45-30

For use with
natural gas only

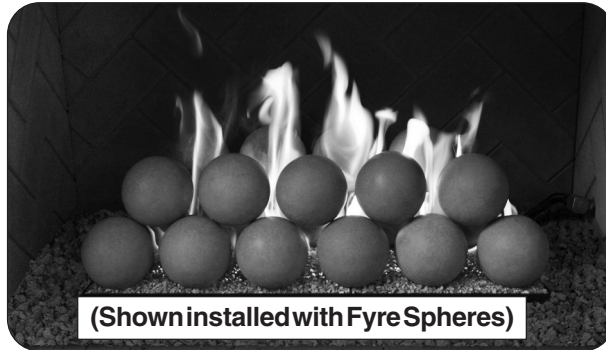

**DESIGN CERTIFIED
to
Manually Lighted,
Vented Decorative Appliance
ANSI Z21.84**

**FOR INSTALLATION IN
SOLID-FUEL BURNING
FIREPLACES***

P45 VENTED BURNER SYSTEMS (MANUALLY LIGHTED)

WARNING

If the information in this manual is not followed exactly, a fire or explosion may result, causing property damage, personal injury, or loss of life.

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

WHAT TO DO IF YOU SMELL GAS:

- Open a window.
- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in the building.
- Immediately call the gas supplier from a neighbor's phone. Follow gas supplier's instructions.
- If you cannot reach the gas supplier, call the fire department.

Installation and service must be performed by a qualified professional service technician, service agency, or the gas supplier.

This appliance is only for use with the type of gas indicated on the rating plate.

IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION OF THE UNIT.

The Real Fyre burner system is to be installed only in a solid-fuel burning fireplace with a working flue and constructed of noncombustible material. The installation, including provisions for combustion and ventilation air must conform with the *National Fuel Gas Code, ANSI Z223.1/NFPA 54*, or the *CSA B149.1, Natural Gas and Propane Installation Code*, and applicable local building codes.

A damper clamp, which must be permanently installed, is included to maintain the minimum permanent vent opening and to prevent full closure of the damper.

The chimney damper MUST be fully opened when burning the unit. The unit is designed to burn with yellow flames; thus adequate ventilation is absolutely necessary.

This appliance is designed as an attended appliance. DO NOT leave this appliance burning when unattended.

To comply with certification, listings, and building code acceptances, and for safe operation and proper performance of this burner system, use ONLY Peterson parts and accessories. Use of other controls, parts, and accessories that are not designed for use with Real Fyre burner systems is prohibited and will void all warranties, certifications, listings, and building code approvals, and may cause property damage, personal injury, or loss of life.

***Note:** Solid-fuels shall not be burned in a fireplace where a decorative appliance is installed.



We recommend that our gas hearth products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute® (NFI) as NFI Gas Specialists.

INSTALLER:
Leave this manual with the appliance.
CONSUMER:
Retain this manual for future reference.



TABLE OF CONTENTS

GETTING STARTED

IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION	3
FIREPLACE OPERATING SAFETY INFORMATION	4
SPECIFICATIONS.....	5
DAMPER CLAMP INSTRUCTIONS.....	8
P45 BURNER REPLACEMENT PARTS LIST	9

INSTALLATION

INSTALLATION.....	10
<i>BURNER INSTALLATION</i>	10
INSTALLATION - LOG SET AND FYRE SPHERE MODELS	12
<i>LAVA GRANULES/COALS (optional)</i>	12
<i>SAND AND VERMICULITE PLACEMENT</i>	12
<i>LOG SET PLACEMENT</i>	13
<i>FYRE SPHERES PLACEMENT</i>	14
INSTALLATION - GLASS MEDIA MODELS	17
<i>SAND PLACEMENT</i>	17
<i>GLASS / GEMS PLACEMENT</i>	18
<i>DECORATIVE MEDIA ON FIREPLACE FLOOR (optional)</i>	18
OPTIONAL ACCESSORIES.....	18

USE, CARE, & SERVICE

LIGHTING INSTRUCTIONS.....	19
<i>FOR YOUR SAFETY, READ BEFORE LIGHTING</i>	19
<i>TO SHUT OFF GAS TO THE APPLIANCE</i>	19
CLEANING AND SERVICING	20
FLAME DESCRIPTION	20
TROUBLESHOOTING	21
NOTES PAGE	23
WARRANTY	24

IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION

CAUTION: Installation and repair must be done by an NFI Certified or other qualified professional installer.

Installer: Carefully read these instructions before installing this gas burner system. Be sure you understand all safety precautions and warnings contained in this manual.

- A. BE CAREFUL:** If not installed, serviced, and used correctly per these instructions, this product can cause serious personal injury, property damage, or loss of life.
- B. WARNING:** When installing in a solid-fuel-burning fireplace, the chimney flue, damper, and firebox must be thoroughly CLEANED of soot, creosote, ashes, and loose paint, and must be inspected by a qualified chimney cleaner. Some older fireplaces may need repair prior to installing this appliance.
- C.** The fireplace floor must be level and smooth.
- D.** This appliance is only for use with the type of gas indicated on the rating plate. This appliance is **NOT FIELD CONVERTIBLE** for use with other gasses.
CHECK GAS TYPE (natural): The gas supply must be the same as stated on your burner system rating plate. If gas supply is different, **DO NOT INSTALL**. Contact your dealer for immediate assistance.
- E.** INSUFFICIENT GAS PRESSURE WILL KEEP THE UNIT FROM OPERATING PROPERLY. DO NOT USE IF GAS PRESSURE IS LOWER THAN THE MINIMUM REQUIREMENT.
- F.** The minimum inlet gas supply pressure for purposes of input adjustment is **5"** water column (w.c.) on **natural gas**. Insufficient gas pressure will affect proper operation of the pilot (if equipped). Do not install this gas appliance if minimum pressure is not available. The maximum inlet gas supply pressure is 10.5" w.c. on natural gas. (Do not connect this appliance directly to a natural gas tank-this can cause an explosion.)
- G.** **The gas piping system must be sized to provide minimum inlet pressure at the maximum flow rate (BTU/hr).** Undue pressure loss will occur if the pipe is too small, or the run is too long. Gas supply pipe must be 1/2" minimum interior diameter. If the gas line is longer than 20', a larger diameter line may be necessary. Refer to the NFPA 54 guidelines for further details.
- H.** Input ratings shown in BTU per hour are for elevations up to 2,000 ft. For elevations above 2,000 ft., refer to the National Fuel Gas Code or contact manufacturer before installing this product.
- I.** This gas appliance and its main gas valve must be disconnected from the gas-supply piping system during any pressure testing of that system at test pressures in excess of 1/2 psig.
- J.** This gas appliance must be isolated from the gas-supply piping system by closing the equipment shutoff valve connected to the gas-supply line during any pressure testing of the gas-supply piping system at test pressures equal to or less than 1/2 psig.
- K.** **To install the gas appliance in your fireplace, the fireplace MUST meet the minimum size requirements (see product specifications table in SPECIFICATIONS section).**
- L.** This appliance may be installed in an aftermarket, permanently located, manufactured (mobile) home, where not prohibited by local codes. Installation of appliances designed for manufactured home (U.S. only) or mobile home installation must conform with the Standard *CAN/CSA Z240 MH, Mobile Housing*, in Canada, or with the *Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280*, in the United States, or when such a standard is not applicable, *ANSI/NCSBCS A225.1/NFPA 501A, Manufactured Home Installations Standard*.
- M.** **DO NOT install this burner system in a fireplace with an ash lip or recess greater than 3/4".**
- N.** If this burner system is installed in a fireplace with **glass doors**, and the doors have a frame that obstructs airflow to the fireplace floor, the frame **MUST** have slots (above the fireplace floor) that allow adequate ventilation. The opening (with doors fully open) **MUST** meet the minimum fireplace size front width and height requirements. The glass doors **MUST** be fully open when the burner is in operation. See the SPECIFICATIONS section for details.
- O.** **ONLY REAL FYRE DECORATIVE MEDIA IS APPROVED FOR USE WITH THIS PRODUCT.** See the MEDIA sections found under SPECIFICATIONS for details. Correct installation of the media (and burner assembly) is imperative to safe operation of your appliance. Problems **WILL** occur if all items are not properly installed.
The correct amount of media **must** be used on your burner system for it to operate properly. You may use additional glass media, or lava granules to cover the floor of the fireplace. Please read the GLASS MEDIA MODELS section for details.

FIREPLACE OPERATING SAFETY INFORMATION

- A. Adults **MUST** be present when this gas appliance is operating. This appliance **MUST NOT** be left burning when unattended or while anyone is sleeping.
- B. Keep the area of the gas burner system clear and free from combustible materials, gasoline, and other flammable vapors and liquids.
- C. DO NOT use this appliance if any part has been underwater. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control that has been underwater. Attempted operation may result in fire or explosion resulting in property damage, personal injury or loss of life.
- D. **A fireplace screen must be in place when the system is burning.** Provisions for adequate combustion air must be maintained. Unless other provisions for combustion air are provided, the screen shall have an opening(s) for introduction of combustion air. Combustion air is adequate when all flames curl into the fireplace and away from the screen. **When a glass fireplace enclosure (door) is used, the glass doors MUST be fully open when the burner is in operation.**
- E. Do not remove the rating plates or the warning tags. These are an integral safety and identification component of this appliance.
- F. Be sure to read the CLEANING AND SERVICING and FLAME DESCRIPTION sections.

SPECIFICATIONS

Real Fyre gas burner systems must be installed only in a wood burning fireplace with the minimum firebox dimensions and venting requirements met (see table on this page). This appliance is designed to burn with yellow flames; adequate ventilation is absolutely necessary.

Product Specifications

Burner Model	Minimum Fireplace Size			BTU Rating	
	Width *		Depth ‡	Height	Nat. Gas
	Front	Rear †			
P45-18	24"	18"	15"	17"	43k
P45-24	30"	24"	15"	17"	65k
P45-30	36"	30"	15"	17"	84k
Important Information Regarding Dimensions					
* These required widths allow for centering of the unit.					
† Rear width is at corresponding depth.					
‡ If an ash lip exists, the depth requirement begins inside of the lip (see Fig. 5-1 below).					

Table 1 - Product Specifications

Fireplace Requirements

These requirements MUST be met:

Ash Lip/Recess

DO NOT install this burner system in a fireplace with an ash lip or recess greater than $\frac{3}{4}$ ". See Fig. 5-1.

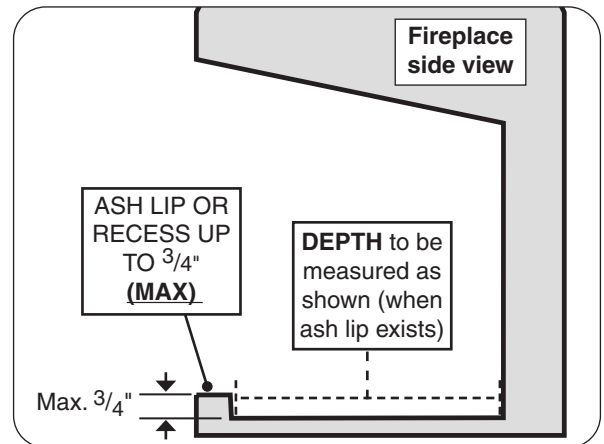


Fig. 5-1 Ash lip/recess detail

Fireplace Requirements (cont.)

Glass Doors

If this burner system is installed in a fireplace with glass doors, and the doors have a frame that OBSTRUCTS AIRFLOW to the fireplace floor, the frame MUST have slots (above the fireplace floor) that allow adequate ventilation. See Fig. 6-1.

Important: The opening (with doors fully open) MUST meet the minimum fireplace size front width and height requirements. See Table 1 (previous page) and Fig. 6-1.

Important: The glass doors MUST be fully open when the burner is in operation.

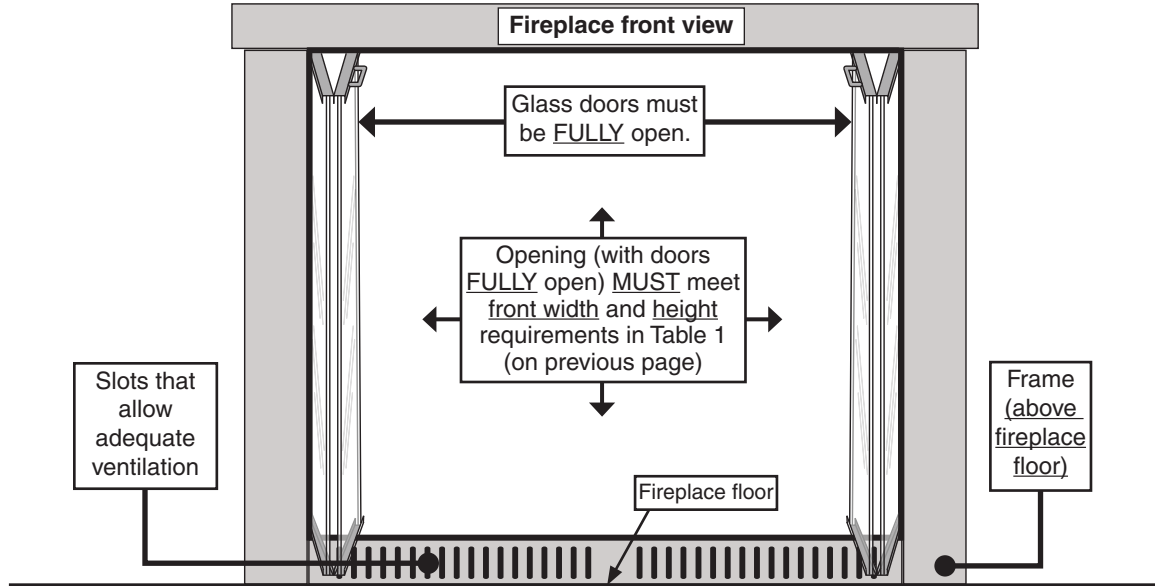


Fig. 6-1 Correct glass-doors frame setup, ventilation, and use (if applicable)

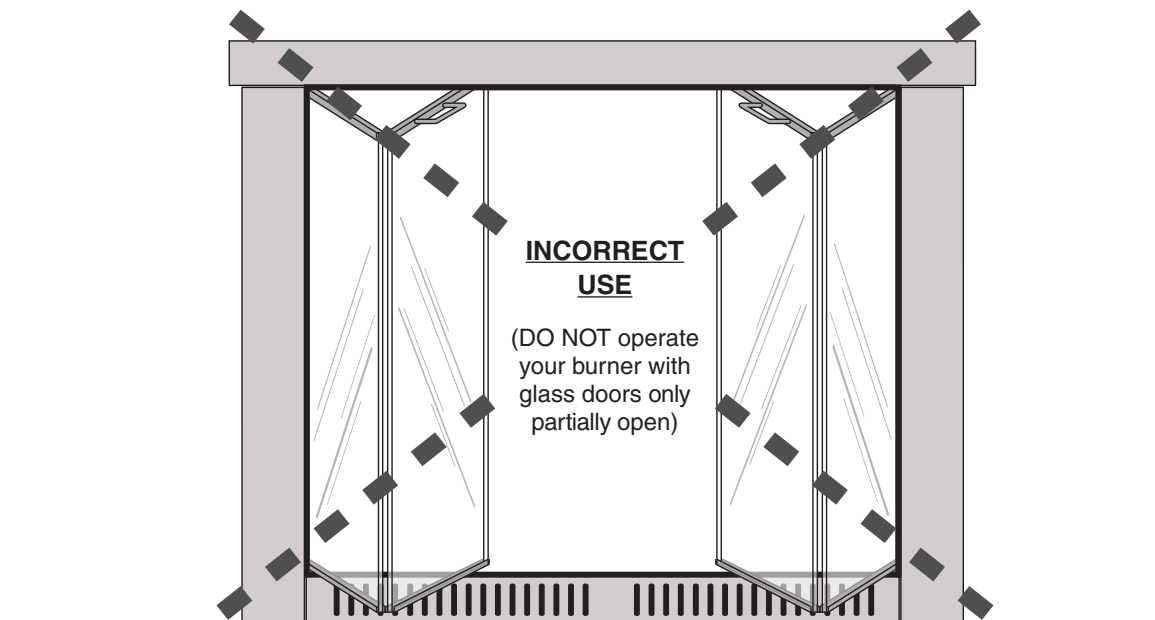


Fig. 6-2 Incorrect glass-doors frame setup, ventilation, and use (if applicable)

SPECIFICATIONS (cont.)

Only the Real Fyre decorative media options listed below are approved for use with this product. Follow the recommendations for media amounts. All decorative media options are purchased separately; contact your local Real Fyre dealer when ordering.

When using Fyre Spheres:

Model size	Correct Amount of Fyre Spheres	
	4" Spheres	5" Spheres
18"	19	14
24"	24	19
30"	34	24

Table 2 - Fyre Sphere Amounts

When using glass media:

Model size	Correct Amount of Glass / Gems
18"	10 lbs
24"	15 lbs
30"	20 lbs

Table 3 - Glass Amounts

When using a log set:

Optional log sets are available. Refer to the instructions included with the log set for complete details.

DAMPER CLAMP INSTRUCTIONS

The damper clamp with hex bolt (Fig. 8-1) is provided as a means to prevent full closure of the damper blade. The clamp is easily attached to most damper blades with pliers or a wrench, and must be permanently installed. The clamp is designed to prevent accidental closure of the damper when installed as illustrated (Fig. 8-2). Should the clamp not fit, or fail to provide the permanent vent opening listed in Table 4 below, have a permanent stop installed, remove the damper blade, or have the damper cut to provide the minimum permanent opening required.




Fig. 8-1 Damper clamp detail

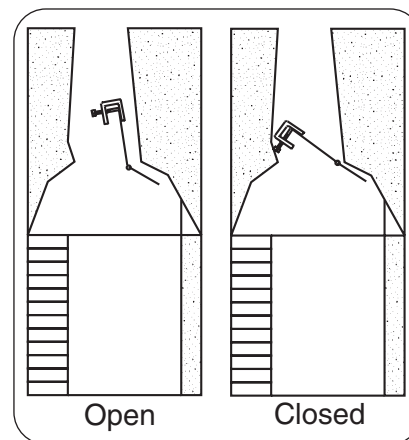


Fig. 8-2 Damper open / closed

Venting Requirements

Note: The minimum chimney height from hearth to top of chimney is 15'.


Minimum permanent free opening area of chimney damper for venting (sq. in.)			
For factory-built fireplaces			
Chimney height	18"	24"	30"
15'	20	30	42
20'	17	25	35
30'	13	19	27
For masonry-built fireplaces			
15'	30	41	52
20'	27	37	47
30'	25	34	43

Table 4 - Minimum Chimney Damper Venting Requirements

THESE ARE MINIMUM DAMPER OPENING SPECIFICATIONS.

THE DAMPER MUST BE COMPLETELY OPENED WHEN OPERATING THIS GAS APPLIANCE TO ACHIEVE THE BEST VENTILATION POSSIBLE.

P45 BURNER REPLACEMENT PARTS LIST

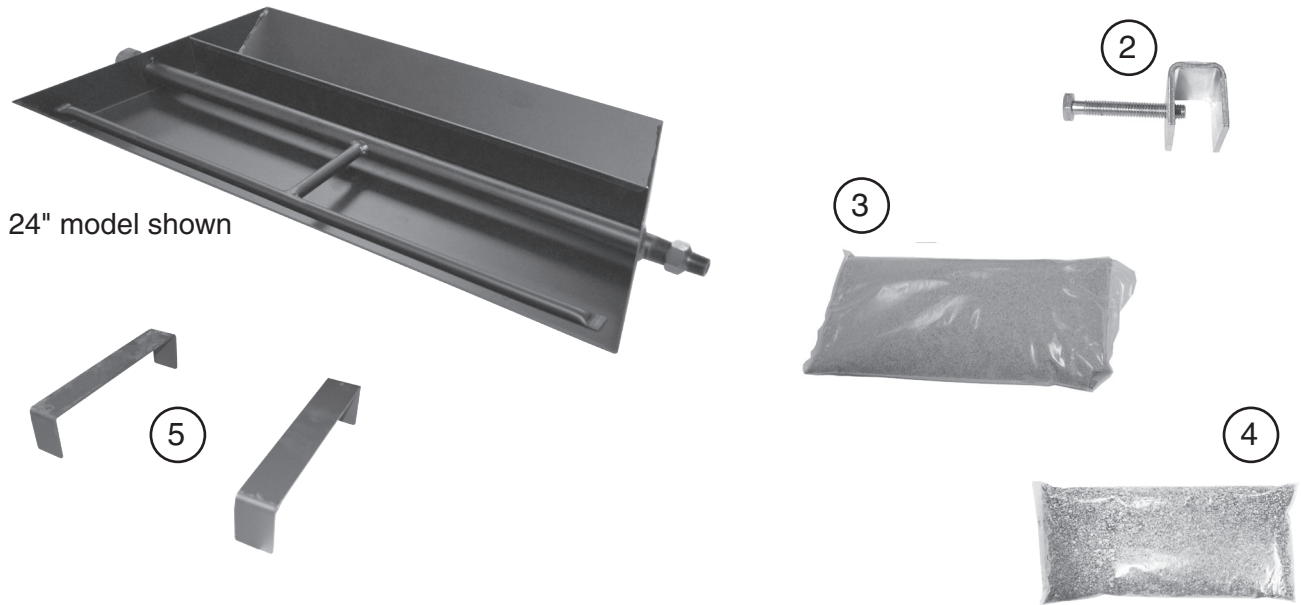

Note: Photos not to scale

Replacement parts can be ordered from your local Real Fyre dealer.

The media option (log set/spheres/glass) is purchased and packaged separately; contact your local Real Fyre dealer when ordering. Refer to the instructions included with the media.

Item	Description	18" model		24" model		30" model	
		Part No.	Qty.	Part No.	Qty.	Part No.	Qty.
1.	Flex connector (w/ adapters), 1/2" O.D. x 24"	CK-5	1	CK-5	1	CK-5	1
2.	Damper clamp	DC-1	1	DC-1	1	DC-1	1
3.	Sand	400071-5	2	400071-16	2	400071-5	3
4.	Vermiculite	LF-15-7	1	LF-15-7	2	LF-15-7	2
5.	Burner legs and hardware (set of 2)	PL-2	1	PL-2	1	PL-2	1

INSTALLATION

The Real Fyre burner system must be installed by a qualified professional service technician. Instructions must be followed carefully to ensure proper performance and full benefit from the burner system. **Check to be sure the burner system is designed and labeled for the type of gas (natural gas only) supplied to the fireplace.** Fireplace floor must be level, clean, and smooth (see FIREPLACE SAFETY INFORMATION section).

WARNING: Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

REFER TO THE BURNER PARTS LIST WHEN FOLLOWING THESE INSTRUCTIONS.

The burner pan is supplied with a fuel injector for natural gas. **The fuel injector must be used in ALL installations.** The fuel injector has a precisely sized orifice to ensure only the proper quantity of gas enters the burner. This allows maximum performance and gas conservation.

24" natural gas burner shown here.

BURNER INSTALLATION

1. **OPTIONAL BURNER LEGS:** The burner is supplied with a set of burner legs. They are designed for use with a decorative fender (if desired - purchased separately). To install (if needed), begin by knocking out the 4 holes in the corners of the burner pan. Then align the burner legs, and install using a Phillips screwdriver and the supplied screws and nuts. See Fig. 10-1.

Note: Refer to the OPTIONAL ACCESSORIES section at the end of installation for details on the decorative fender.

2. **MAKE SURE THE FIREPLACE GAS SUPPLY IS TURNED OFF.**

3. Locate the gas-supply stub inside the fireplace and remove the cap, if attached (reference Fig. 10-2).

CAUTION: When removing the cap, make sure the stub does not turn, loosening the connection inside the wall.

4. Remove the small adapter connected to the flex connector (included). Attach the adapter to the fuel injector found on the side of the burner pan using a pipe compound resistant to all gasses. Tighten securely. Then attach the flex connector to the adapter. Tighten securely (See Fig. 10-2).

Important: Do not remove the fuel injector.

5. Place the burner system in the fireplace. Center the burner from left to right in the fireplace. (Reference Fig. 10-3 for orientation.)

6. **Be sure gas to the fireplace is off.** Remove the large adapter connected to the flex connector. Attach the adapter to the gas-supply stub using a pipe compound resistant to all gasses. Tighten securely. Then attach the flex connector to the adapter. Tighten securely (See Fig. 10-2).

Important: Ensure the pan rests level on the fireplace floor after connection.

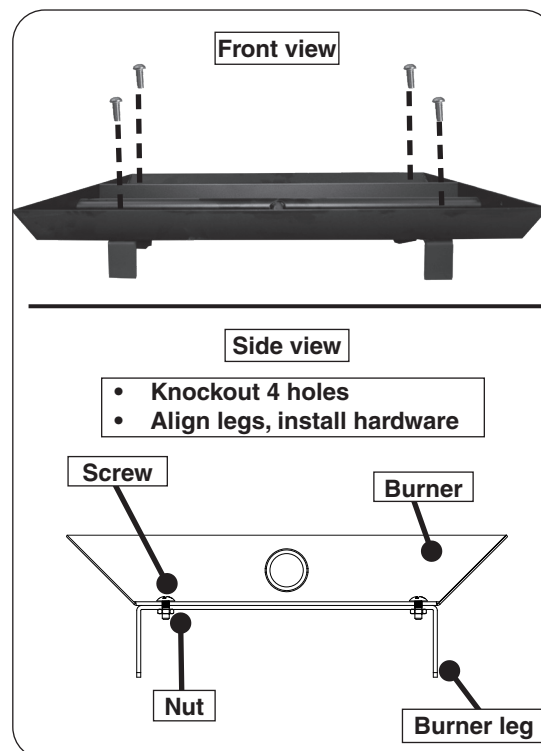


Fig. 10-1 Install burner legs (if needed)

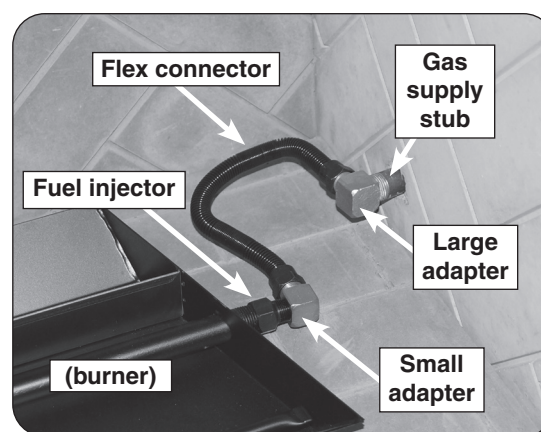


Fig. 10-2 Connect gas supply

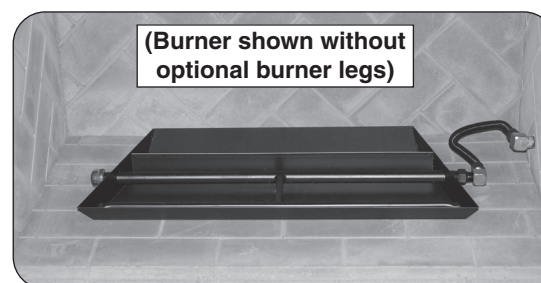


Fig. 10-3 Center burner in fireplace

7. **LEAK TEST:** Use a long-necked butane lighter, or lay a lighted match next to the burner pipe, and carefully turn on the gas supply until the burner ignites. Test at all connections for leaks using the appropriate soapy water solution. See Fig. 11-1. If bubbles appear, a leak is present. Turn off the gas and tighten at all connections. Repeat until no leaks are present. If a leak persists, turn off the gas supply and contact the local gas company or dealer. **NEVER USE A FLAME TO CHECK FOR LEAKS..**

Turn off the gas supply and allow unit to completely cool prior to proceeding.

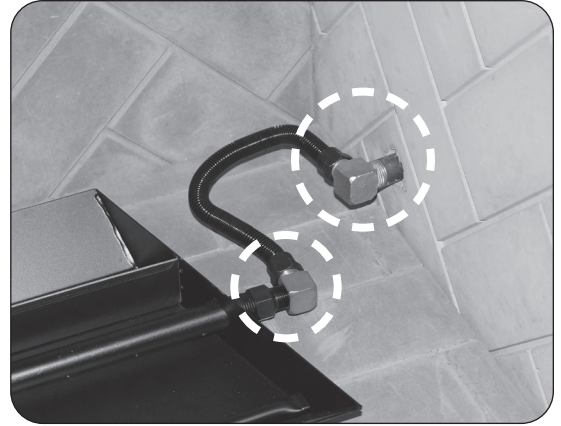


Fig. 11-1 Perform leak test

THIS SECTION ADDRESSES INSTALLATION WITH A LOG SET OR FYRE SPHERES ONLY.

If installing with glass media, refer to the following INSTALLATION - GLASS MEDIA MODELS section.

LAVA GRANULES/COALS (optional)

Optional lava granules and lava coals are available for decorative purposes. Contact your dealer for ordering information.

If purchased, follow the steps below.

1. Spread the lava granules on the floor of the fireplace, around the front and sides of the burner system (see Fig. 12-1).
2. Repeat this process for the lava coals (on top of the already placed lava granules).

Note: DO NOT place any lava media on the burner system, or behind it.

SAND AND VERMICULITE PLACEMENT

The sand and vermiculite supplied with the unit is specially selected for use with natural gas. They maximize flame distribution and provide a cleaner burning flame.

CAUTION: Use only the sand and vermiculite provided for this natural gas burner.

1. Fill the burner pan with the supplied bag of sand (see Fig. 12-2).

Note: Gently shake the burner pan and/or tap it on the fireplace floor to ensure the sand settles in the pan. The sand should rest at a level approximately halfway up the center burner tube.

2. Fill the burner pan completely with the supplied bag of vermiculite (see Fig. 12-3). The vermiculite is poured directly onto the already placed sand.

Important: Ensure the vermiculite is level with the top of the burner pan. This is important to ensure quiet lighting and even flame distribution.



Fig. 12-1 Place lava media (if purchased)



Fig. 12-2 Place sand

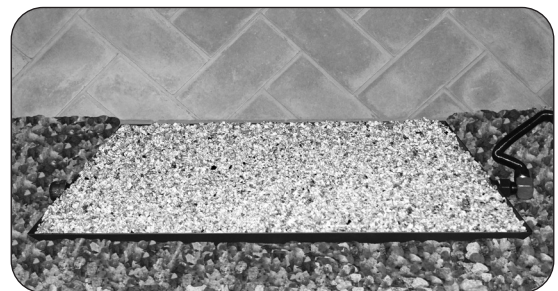


Fig. 12-3 Place vermiculite

LOG SET PLACEMENT

- Follow the instructions included with the log set for step by step log and ember placement.
- Read all safety warnings and important information in the instructions supplied with the log set to ensure proper placement.

Below are examples of the log sets currently available for this burner system:



Shoreline Oak (SO-24)



Shoreline Driftwood (SDW-24)

Important: Adequate ventilation is absolutely necessary! Provided significant, noticeable sooting does not occur, some flexibility is possible in log placement to suit your individual preference. If you experience a continued accumulation of black carbon (soot) on your logs it is an indication of incomplete combustion and you should move the effected log(s) so as to minimize the flame contact on the effected log(s). Read the instructions supplied with the log set completely and carefully.


CAUTION: BURN HAZARD! Logs will remain hot for some time after use. If you need to reposition any log to maintain the proper layout, use heat-resistant gloves or allow logs adequate time to cool before handling.

FYRE SPHERES PLACEMENT

You must position and maintain the sphere layout as shown here to ensure optimal operation of the burner system. **Do not add any additional spheres to this burner system. Any additional spheres may cause unsafe operation. Locate the section applicable to your model selected.**


CAUTION: BURN HAZARD! Spheres will remain hot for some time after use. If you need to reposition any sphere to maintain the proper layout, use heat-resistant gloves or allow spheres adequate time to cool before handling.

18" Models

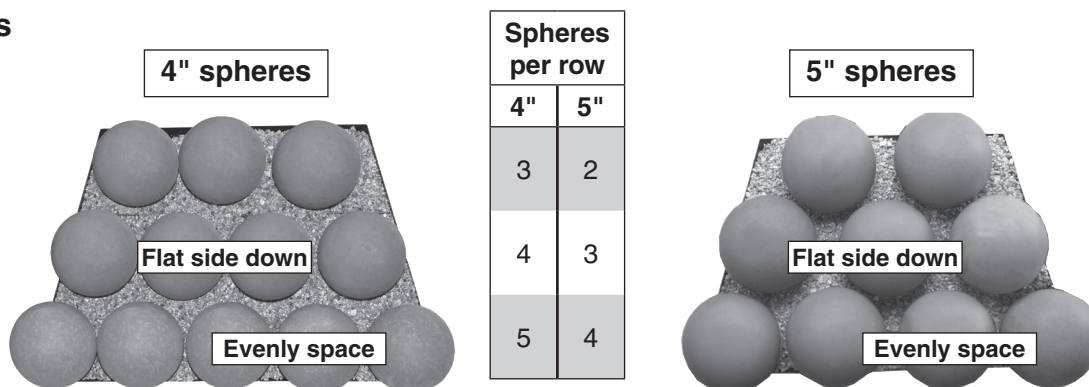


Place the first level of the spheres on the burner pan in 3 rows as shown above.

- Be sure to place the amount of spheres in each row as indicated. Amount will vary depending on the size of the spheres being used (4" or 5"). See chart and images above.
- Be sure that the spheres are evenly spread out on the pan. This may result in small gaps in between the spheres.

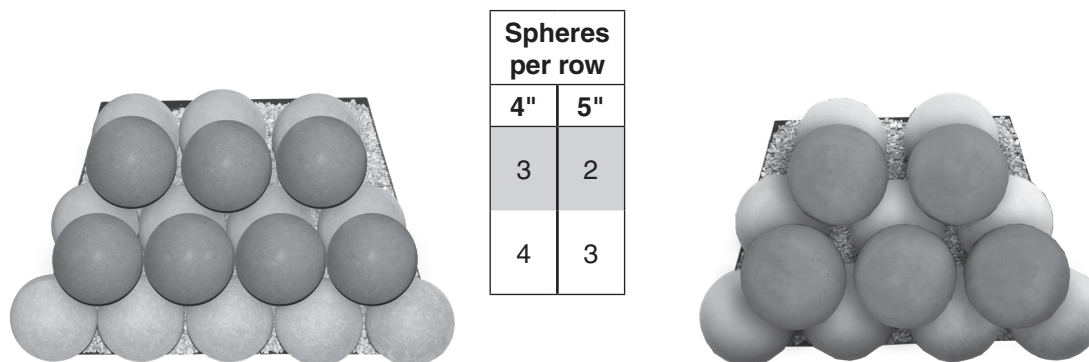


Place the second level of the spheres (on the spheres below) in 2 rows as shown above.

- Be sure to place the amount of spheres in each row as indicated. Amount will vary depending on the size of the spheres being used (4" or 5"). See chart and images above.
- Be sure that the spheres are evenly spread out on the spheres below. This may result in small gaps in between the spheres.

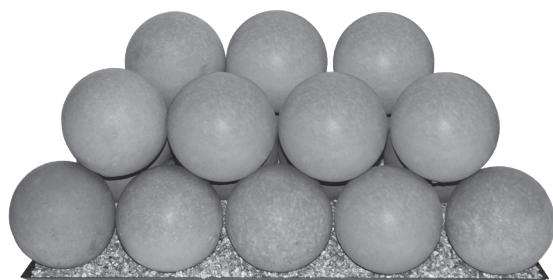


Complete 4" Sphere Setup - Front View

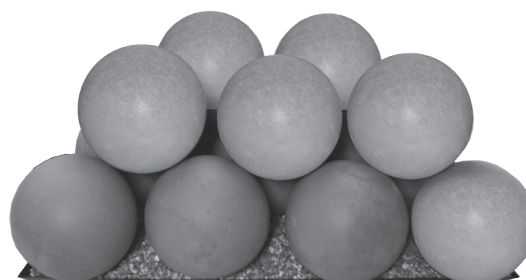


Complete 5" Sphere Setup - Front View

INSTALLATION - LOG SET AND FYRE SPHERE MODELS (cont.)

24" Models

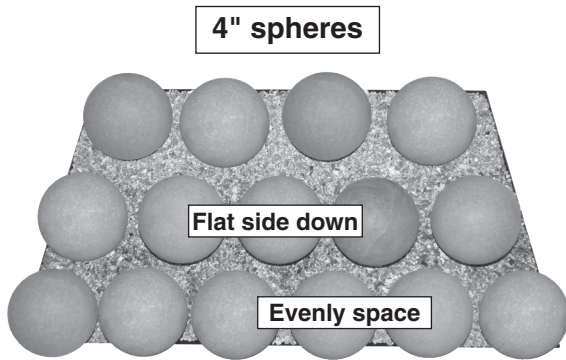


Spheres per row	
4"	5"
4	3
5	4
6	5

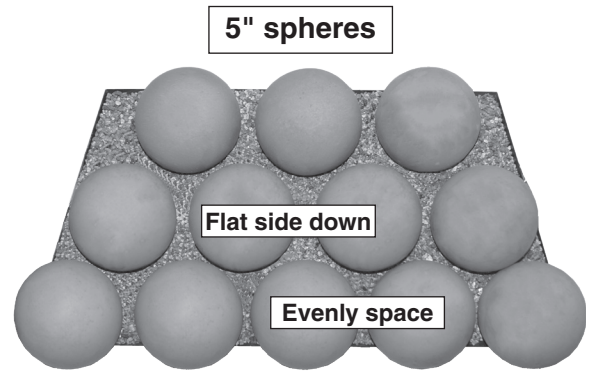


Place the first level of the spheres on the burner pan in 3 rows as shown above.

- Be sure to place the amount of spheres in each row as indicated. Amount will vary depending on the size of the spheres being used (4" or 5"). See chart and images above.
- Be sure that the spheres are evenly spread out on the pan. This may result in small gaps in between the spheres.

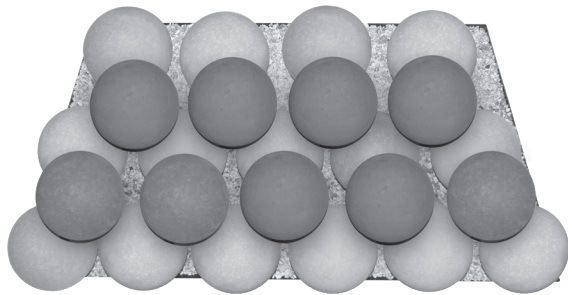


Spheres per row	
4"	5"
4	3
5	4

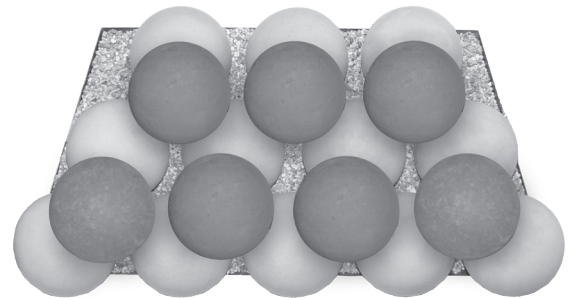


Place the second level of the spheres (on the spheres below) in 2 rows as shown above.

- Be sure to place the amount of spheres in each row as indicated. Amount will vary depending on the size of the spheres being used (4" or 5"). See chart and images above.
- Be sure that the spheres are evenly spread out on the spheres below. This may result in small gaps in between the spheres.

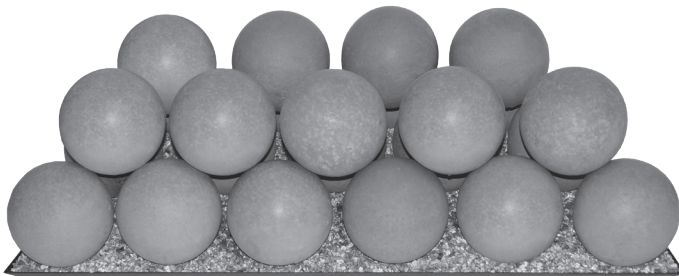


Complete 4" Sphere Setup - Front View

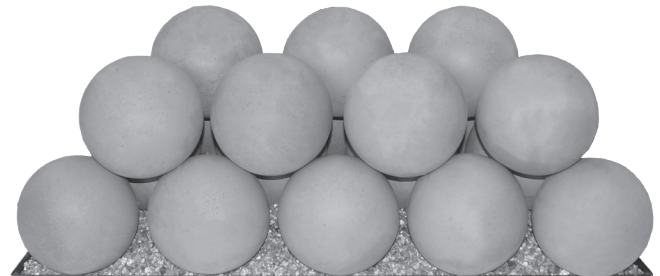

Complete 5" Sphere Setup - Front View


INSTALLATION - LOG SET AND FYRE SPHERE MODELS (cont.)

30" Models

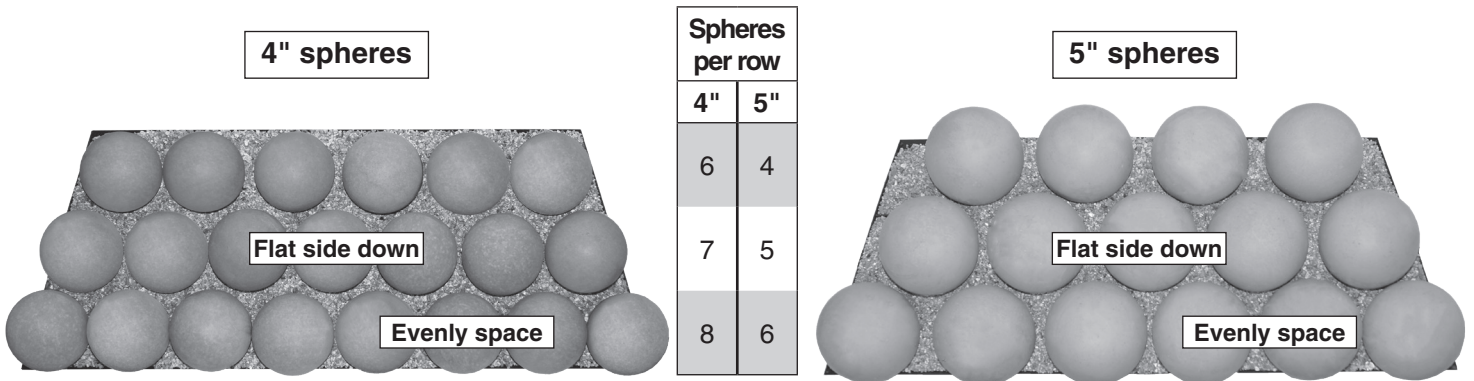


Place the first level of the spheres on the burner pan in 3 rows as shown above.

- Be sure to place the amount of spheres in each row as indicated. Amount will vary depending on the size of the spheres being used (4" or 5"). See chart and images above.
- Be sure that the spheres are evenly spread out on the pan. This may result in small gaps in between the spheres.

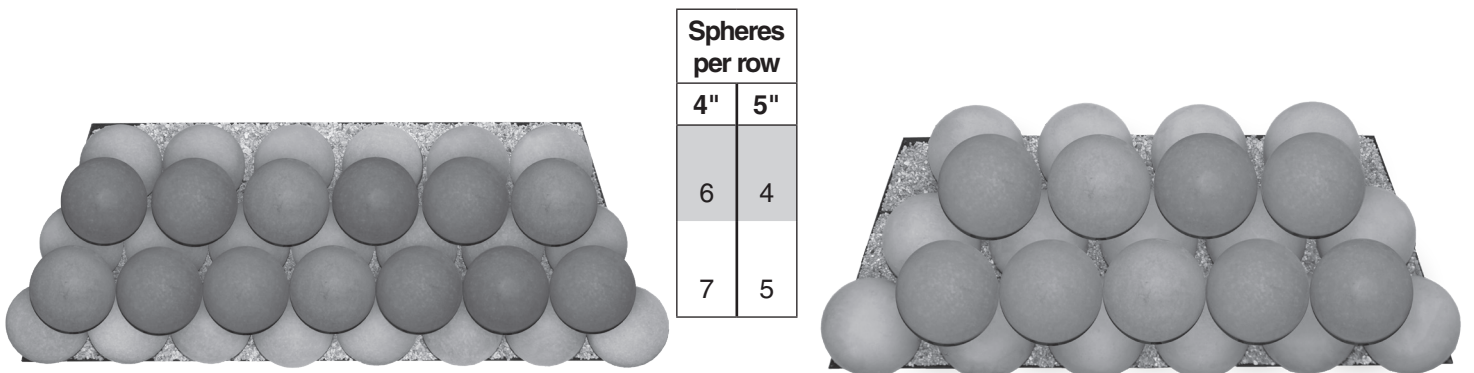

Place the second level of the spheres (on the spheres below) in 2 rows as shown above.

- Be sure to place the amount of spheres in each row as indicated. Amount will vary depending on the size of the spheres being used (4" or 5"). See chart and images above.
- Be sure that the spheres are evenly spread out on the spheres below. This may result in small gaps in between the spheres.

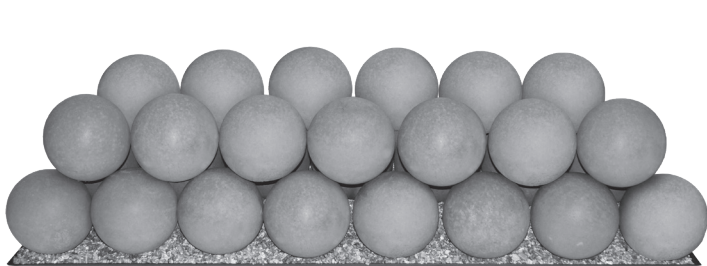

Complete 4" Sphere Setup - Front View



Complete 5" Sphere Setup - Front View

THIS SECTION ADDRESSES INSTALLATION WITH GLASS MEDIA ONLY.

If installing with a log set or Fyre Spheres, refer to the previous INSTALLATION - LOG SET AND FYRE SPHERES MODELS section.

SAND PLACEMENT

The sand supplied with the unit is specially selected for use with natural gas. It maximizes flame distribution and provides a cleaner burning flame.

CAUTION: Use only sand for natural gas burners.

Important: **DO NOT use the bag of vermiculite when installing this burner system with glass. Set the vermiculite aside or discard. Only use the bag of sand.**

1. Fill the burner pan with the supplied bag of sand (see Fig. 17-1).

Note: Gently shake the burner pan and/or tap it on the fireplace floor to ensure the sand settles in the pan. The sand should rest at a level approximately halfway up the center burner tube.



Fig. 17-1 Place sand

INSTALLATION - GLASS MEDIA MODELS (cont.)

GLASS / GEMS PLACEMENT

CAUTION: Glass pieces may have sharp edges. Be careful handling the glass. Use hand protection, such as gloves, if necessary.

Glass / gems must be installed on the burner for the system to operate properly. The glass media is purchased and packaged separately. Contact your local Real Fyre dealer for ordering information.

Reference the SPECIFICATIONS section for details on the recommended amounts of media.

1. **After the required sand has been placed**, pour the glass media (glass, gems) evenly into the burner pan (see Fig. 18-1). The glass should be flush with the top of the pan. **DO NOT** overfill.

Important: Do not add any additional glass / gems to this burner system. Any additional glass / gems may cause unsafe operation.

DECORATIVE MEDIA ON FIREPLACE FLOOR (optional)

Optional glass, gems, or lava media may be placed on the fireplace floor as an enhancement to the burner system.

If purchased; spread the decorative media on the floor of the fireplace, around the front and sides of the burner system. See Fig. 18-2 for an example (glass shown).



Fig. 18-1 Place glass media



Fig. 18-2 Decorative media floor placement

CAUTION: BURN HAZARD. GLASS AND/OR GEMS ON BURNER SYSTEM WILL REMAIN HOT FOR SOME TIME AFTER USE. You must maintain the placement as shown to ensure proper operation of the burner system. If you need to reposition any media to maintain the proper layout, use heat-resistant gloves or allow media adequate time to cool before handling.

OPTIONAL ACCESSORIES

Optional decorative fenders are available for your burner system. Contact your local dealer for ordering information.

Follow all instructions provided with the fender.

Note: The burner legs supplied with your burner must be installed in order to add a decorative fender. See the beginning of INSTALLATION for details.

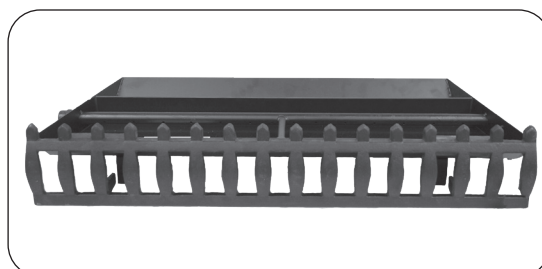


Fig. 18-3 Fender option (FF-04 series)

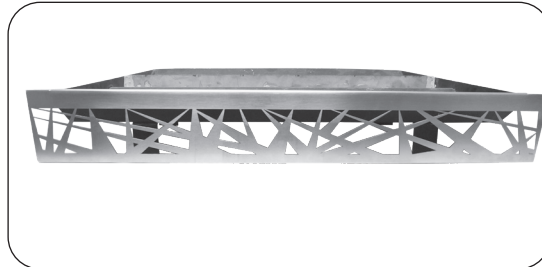


Fig. 18-4 Nest fender option (FF-05 series)

LIGHTING INSTRUCTIONS

FOR YOUR SAFETY, READ BEFORE LIGHTING

WARNING: IF YOU DO NOT FOLLOW THESE INSTRUCTIONS EXACTLY, A FIRE OR EXPLOSION MAY RESULT, CAUSING PROPERTY DAMAGE, PERSONAL INJURY, OR LOSS OF LIFE.

- A. BEFORE LIGHTING**, smell all around the unit area for gas. Be sure to smell next to the floor, because some gas is heavier than air and will settle on the floor.
- B. WHAT TO DO IF YOU SMELL GAS**
 1. Shut off the gas to the appliance.
 2. Extinguish any open flame.
 3. If odor continues, immediately call your gas supplier or the fire department.
- C.** Use only a proper key to turn the gas line valve. Never use tools. If the valve will not turn, **DO NOT** try to repair it. Call a qualified professional service technician. Force or attempted repair may result in fire or explosion.

1. **STOP!** Read the safety information above.
2. Ensure the key valve is completely in the **OFF** position before beginning lighting sequence.
3. Light a long-stem match or a long-necked butane lighter, and place the flame against the surface of the decorative media near the burner (Fig. 19-1).
4. **Once the flame is in position**, slowly turn the key valve counter-clockwise toward the **ON** position until it no longer rotates (see Fig. 19-2). Your burner should light.

WARNING: If the burner does not light within (5) seconds of turning on the key valve, immediately turn the key valve clockwise toward the **OFF** position until it no longer rotates.

Wait approximately five (5) minutes to clear out any gas, and repeat steps 3-4 above.

If your burner fails to light again, turn the key valve clockwise toward the OFF position until it no longer rotates and contact your dealer or gas supplier.

Note: The flame height can be adjusted via the key valve.

TO SHUT OFF GAS TO THE APPLIANCE

To extinguish your gas burner, turn the key valve clockwise toward the **OFF** position until it no longer rotates (see Fig. 19-2). Be sure the key valve is turned fully off to avoid any gas leakage.

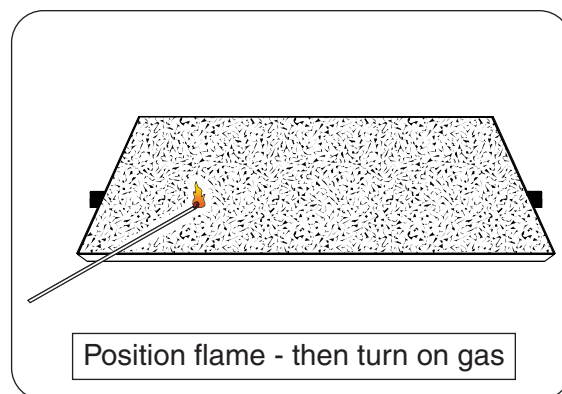


Fig. 19-1

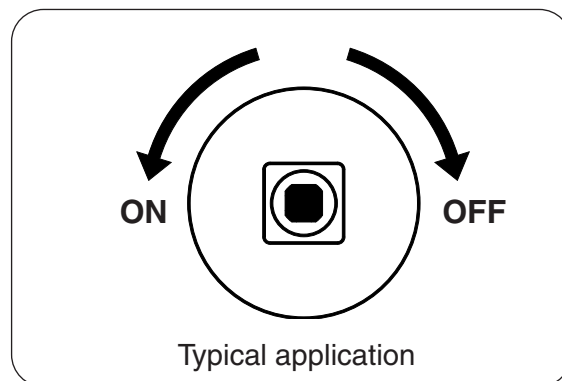


Fig. 19-2

CLEANING AND SERVICING

Note: Servicing may be necessary to ensure proper operation and burn characteristics.

Always shut off the gas to the appliance while performing service work.

Allow the appliance to cool before servicing.

Installation, service, and repair must be done by an NFI Certified or other qualified professional service technician. The appliance should be examined before use, and must be inspected at least annually to prevent burner shutdown, sooting, odors, etc. It must be checked for clean burning operation with the correct tools to service this unit. More frequent servicing may be required. It is imperative that all components and compartments, burner(s), and circulating air passageways of the appliance be kept clean and free of all obstructions (as applicable).

In addition, a periodic examination and cleaning of the fireplace venting system should be conducted by a qualified professional service technician.

Any safety screen or guard removed for servicing must be replaced prior to operating this appliance.

Verify proper operation after servicing.

If, after a period of use, the flames start to exhibit unusual shapes and behavior, or the burners fail to ignite smoothly, the burner may require cleaning or servicing. If this happens, it is recommended to contact the nearest dealer to get the appliance serviced.

DO NOT remove the rating plates or the warning tags. These are an integral safety and identification component of this appliance.

We recommend following these instructions at the beginning of each fireplace season and as needed throughout the year, depending on your usage pattern and the environmental conditions in your home.

FLAME DESCRIPTION

Observe the flames. The flames should be blue at the base and a combination of blue/yellow at the body and at the tips. The flames should be approximately 5-8" above the log set/spheres/glass, with the center flame being the tallest. (See 20-1 for example.)

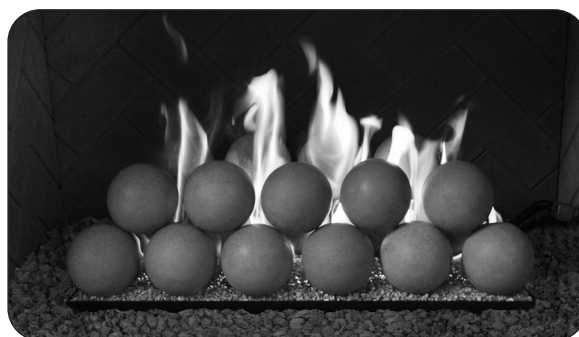


Fig. 20-1 Flame appearance

TROUBLESHOOTING

POSSIBLE CAUSE	SOLUTIONS
1 BURNER SHUTTING DOWN DURING OPERATION	
A. Insufficient or excessive gas pressure	A1. Check gas pressure (Read D.- F. of IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION section, & <u>check with local gas company</u>). A2. Other gas appliances may be on the same gas line, dropping gas pressure to the burner. Check pressures with everything operating to ensure adequate pressure.
B. Fireplace too small for unit	B. Ensure minimum requirements are met (see SPECIFICATIONS section).
C. Blockages on burner	C. Vacuum any lava granules or material that may have fallen onto burner port area.
2 LOW FLAME HEIGHT	
A. Gas pressure	A. Check gas pressure (see Section 1, A1 of this table).
B. Key valve not fully open	B. Open key valve fully.
C. Blockage or kink in flex connector kit, plumbing, or burner orifice	C. Clean out blockage. If flex connector is kinked, replace it.
3 BURNER NOT BURNING EVENLY	
A. Burner ports clogged	A. Clean burner ports.
B. Media may be packed down too tightly	B. Loosen media around burner pipe by running a flathead screwdriver along both sides of the pipe. Even out media in burner pan.
4 ODORS	
A. Gas leak	A. Shut off gas, if possible. Follow instructions on front page. Have a qualified professional installer or the gas company correct all leaks.
B. New home, new carpet, or new paint	B. When these odors are drawn into the fireplace, this may cause objectionable odors. Thoroughly ventilate the area before restarting your burner system.
C. Damper closed	C. Ensure that damper is open.

Due to the design of this burner system, sooting will occur on the log set or Fyre spheres. This is a result of the yellow flame generated by the burner and is normal. If sooting occurs in the firebox or in the room, refer to the information below:

A. Poor draft or downdraft	A. Check for chimney blockage. Be sure chimney is at least 3' taller than anything within 10' of it in all directions. If not, consult a chimney sweep. A chimney cap or fan may help.
B. Damper closed	B. Ensure that damper is open.
C. Burner is positioned too close to front of firebox	C. Move burner system to the center of the firebox.
D. Improper media placement	D. See INSTALLATION section for proper media placement.
E. Air shutters blocked (if applicable)	E. Air shutters are blocked with debris. Vacuum debris away from air shutter.
F. Log set or sphere placement (if applicable)	F. See solution in Section 1, B.
G. Using a product other than Real Fyre glass/gems with burner (if applicable)	G. Make sure only Real Fyre glass/gems are used with your burner.
H. Using natural-gas burner on propane gas	H. If the gas listed on the nameplate does not match the gas you are burning, shut down the burner system immediately. Then call your dealer.
I. Adding any accessories to burner system	I. Shut down burner system and take off any accessories that do not belong with the system.

Please use this page to record any information that you may want to have at hand.

WARRANTY

PETERSON INDOOR VENTED DECORATIVE GAS APPLIANCE LIMITED WARRANTY

Robert H. Peterson Co. ("RHP") warrants your Real Fyre® vented decorative gas appliance to be free from defects in material and workmanship. This warranty is for indoor use only.

Peterson vented ceramic refractory gas logs are warranted for **as long as you own them (lifetime)**.

Peterson vented burner assemblies excluding valves, pilots, and controls are **WARRANTED for TEN (10) YEARS**.

Peterson glass, gems, nuggets, and fiber-ceramic blend gas logs are warranted for **FIVE (5) YEARS**.

SPK-26 controls are warranted for **THREE (3) YEARS**.

APK-17 controls (including -17 valve) are warranted for **TWO (2) YEARS**.

All other Peterson valves, pilots, and controls are warranted for **ONE (1) YEAR (excluding batteries)**.

A COPY OF YOUR SALES SLIP FOR PROOF OF PURCHASE IS REQUIRED

This warranty applies to the original purchaser for products which are installed in the United States or Canada and which are operated and maintained as intended. This warranty is valid only with proof of purchase, commence on the date of purchase, and terminates (both as to original and any replacement products) on the anniversary date of the original purchase of the product per the above schedules.

This warranty covers defects in material and workmanship. This warranty **does not** cover parts which become defective as a result of negligence, misuse, use not in compliance with the Installation and Owner's Manual, accidental damage, improper handling, improper storage, improper installation, **lack of required routine maintenance** (as specified in the Installation and Owner's Manual), electrical damage, local gas impurities or failure to protect against combustibles. Product must be installed (and gas must be connected) as specified in the Installation and Owner's Manual by a **qualified professional installer**. Modifications to products which are not specifically authorized will void this warranty. Accessories, parts, valves, remotes, etc. when used must be Peterson products or this warranty is void. Warranted items will be repaired or replaced at Peterson's sole discretion. This warranty **does not** apply to rust, corrosion, oxidation, or discoloration unless the affected part becomes inoperable.

This warranty **does not** cover labor or labor related charges, except as provided by separate specific written programs from the Peterson Co. All repair work must be performed by a qualified professional service person and requires prior approval of Peterson.

Peterson may require the defective product or part to be returned to the factory to determine the cause of failure. Peterson will pay freight charges if the product or part is determined to be defective. This warranty does not cover breakage in shipment from our (Independent) distributor to its customer if the damage is determined to have occurred during that shipment.

This warranty specifically excludes liability for **indirect, incidental, or consequential** damages. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specified legal rights, and you may have other rights that vary from state to state or province.

For additional information regarding this warranty, or to place a warranty claim, contact the R. H. Peterson dealer where the product was purchased.

When contacting your Peterson dealer or the R. H. Peterson Co., please provide the following information:

- Your name, address, telephone number, e-mail
- Sales receipt showing where purchased and date purchased
- Model number, serial number of product, date code
- Relevant information: installer, additions, repairs, when defect was first noted

**TO REGISTER YOUR PRODUCT ONLINE GO TO: WWW.RHPETERSON.COM,
AND CLICK ON PRODUCT REGISTRATION. THANK YOU FOR YOUR PURCHASE.**

FOR USE IN THE COMMONWEALTH OF MASSACHUSETTS

INSTALLATION OF THIS APPLIANCE MUST BE IN COMPLIANCE WITH 248 CMR: BOARD OF STATE EXAMINERS OF PLUMBERS AND GAS FITTERS AND PERFORMED BY A MASSACHUSETTS LICENSED PLUMBER OR GAS FITTER ONLY.

CONNECTOR KITS USED FOR INSTALLATION AND OPERATION OF THIS APPLIANCE MUST NOT BE MORE THAN 36" IN LENGTH.

FIREPLACE DAMPER MUST BE REMOVED OR PERMANENTLY FIXED/WELDED IN FULL OPEN POSITION PRIOR TO INSTALLING THIS PRODUCT.

Quality Check		Date: _____	
Burner Orifices	Nat. _____	Leak Test:	_____ Model#: _____
Main:	_____	Burn Test:	_____ Serial#: _____
Other:	_____	Gas Type:	Nat. _____ Air Shutter: _____
		Inspector:	_____